



TOYO TIRES[®]

PASSENGER & LIGHT TRUCK TIRES

2022 PRODUCT DATA BOOK

TOYO TIRES PASSENGER & LIGHT TRUCK TIRES 2022 PRODUCT DATA BOOK

CORPORATE OFFICE

5665 Plaza Drive, Suite 300
Cypress, CA 90630
714-236-2080
800-678-3250
FAX: 714-229-6183
www.toyotires.com

CONSUMER RELATIONS

800-442-8696
Office Hours
Monday thru Friday
6:00AM to 4:00PM Pacific Time

©2022 TOYO TIRE U.S.A. CORP.
PUBLISHED MARCH 2022





UNDRIVEN



VALED

LT

LIGHT TRUCK / SUV / CUV /
COMMERCIAL VAN

S

SPORTS CAR

C

COMPETITION

P

PASSENGER CAR

W

WINTER



**LIGHT TRUCK / SUV / CUV /
COMMERCIAL VAN**

OPEN COUNTRY M/T	14
OPEN COUNTRY R/T	17
OPEN COUNTRY A/T III	20
OPEN COUNTRY H/T II	26
OPEN COUNTRY Q/T	29
PROXES ST III	31
CELSIUS CUV	33
OPEN COUNTRY C/T	35
M-55	37
H08+	39
CELSIUS CARGO	41

SPORTS CAR

CELSIUS SPORT	47
PROXES SPORT	49
PROXES SPORT A/S	51
PROXES R1R	55

PASSENGER CAR

EXTENSA HP II	77
EXTENSA A/S II	79
CELSIUS	81

COMPETITION

PROXES R888R	61
PROXES RR	63
PROXES RA1	65
PROXES RS1	67
PROXES TQ	69
OPEN COUNTRY SxS	71

WINTER

OBSERVE GSI-6	87
OBSERVE G3-ICE	91
OPEN COUNTRY WLT1	95

ORIGINAL EQUIPMENT 97

TIRE SAFETY

LOAD AND SPEED RATINGS	99
CONSUMER ADVISORY	105
TECHNICAL BULLETINS	106

REFERENCE GUIDES

LIGHT TRUCK	107
PASSENGER CAR	111
WINTER	117
CONTACT INFO	120





500 MILE

TOTAL CONFIDENCE, NO REGRETS.

When it comes to a major purchase like new tires, there's nothing more reassuring than trying them on for size. If you don't love your Toyo tires in the first 500 miles or 45 days, you can return them to your dealer.

Visit [ToyoTires.com/TrialOffer](https://www.toyotires.com/TrialOffer) for complete details.

The Toyo Tires 500 Mile Trial – one more reason to be totally confident in Toyo Tires.



LET TRIAL

500
MILE
OR 45 DAY TRIAL*



LIGHT TRUCK / SUV / CUV /
COMMERCIAL VAN

CONNO





QUER

LT

LT / SUV / CUV / COM VAN

OPEN COUNTRY M/T



OFF-ROAD
MAXIMUM TRACTION

DRY HANDLING	3.5
WET HANDLING	3.5
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	3.5
OFF-ROAD TRACTION	5.0
WINTER HANDLING	3.5
FUEL EFFICIENCY	2.0

UTQG

N/A

MILEAGE WARRANTY

--

VEHICLE & APPLICATION SEGMENT

Full-Size Pickups
Plus Sizing

SPEED RATING

P-Q

WHEEL DIAMETER

15"-16"-17"-18"-20"-22"-24"-26"

OPEN COUNTRY R/T



ON/OFF-ROAD
RUGGED TERRAIN

DRY HANDLING	4.0
WET HANDLING	4.0
RIDE COMFORT	3.5
QUIET RIDE	3.5
TREAD LIFE	4.0
OFF-ROAD TRACTION	4.5
WINTER HANDLING	4.0
FUEL EFFICIENCY	2.0

UTQG P-/EURO-METRIC SIZES

500 A B

MILEAGE WARRANTY

45,000 miles*

VEHICLE & APPLICATION SEGMENT

Full-Size Pickups
Plus Sizing

SPEED RATING

Q

WHEEL DIAMETER

15"-16"-17"-18"-20"-22"-24"

OPEN COUNTRY A/T III



ON/OFF-ROAD
ALL-TERRAIN

DRY HANDLING	4.0
WET HANDLING	4.5
RIDE COMFORT	3.5
QUIET RIDE	4.0
TREAD LIFE	5.0
OFF-ROAD TRACTION	4.0
WINTER HANDLING	5.0
FUEL EFFICIENCY	3.0
SNOW TRACTION	5.0

UTQG P-/EURO-METRIC SIZES

S-/T-Rated: 600 A B
H-Rated: 600 A A
LT Sizes: N/A

MILEAGE WARRANTY

Up to 65,000 miles*

VEHICLE & APPLICATION SEGMENT

Crossovers
Full-Size SUVs and CUVs
Full-Size Pickups
Crossovers
Direct OE Replacement
Plus Sizing

SPEED RATING

Q-R-S-T-H

WHEEL DIAMETER

15"-16"-17"-18"-19"-20"-22"



OPEN COUNTRY H/T II



HIGHWAY ALL-SEASON

DRY HANDLING	4.0
WET HANDLING	4.5
RIDE COMFORT	4.0
QUIET RIDE	4.5
TREAD LIFE	5.0
OFF-ROAD TRACTION	2.5
WINTER HANDLING	4.0
FUEL EFFICIENCY	4.0

UTQG P-/EURO-METRIC SIZES

S-/T-Rated: 740 A B
H-/V-Rated: 740 A A
235/55R18 100V: 600 A A
LT Sizes: N/A

MILEAGE WARRANTY

Up to 70,000 miles*

VEHICLE & APPLICATION SEGMENT

Crossovers
Full-Size SUVs
Full-Size Pickups
Direct OE Replacement

SPEED RATING

S-T-H-V

WHEEL DIAMETER

15"-16"-17"-18"-20"-21"-22"

OPEN COUNTRY Q/T



CUV/SUV TOURING ALL-SEASON

DRY HANDLING	4.5
WET HANDLING	4.5
RIDE COMFORT	4.5
QUIET RIDE	5.0
TREAD LIFE	4.5
OFF-ROAD TRACTION	2.5
WINTER HANDLING	4.0
FUEL EFFICIENCY	4.0

UTQG

S-/T-Rated: 680 A B
H-/V-Rated: 680 A A

MILEAGE WARRANTY

65,000 miles*

VEHICLE & APPLICATION SEGMENT

Crossovers
Luxury SUVs
Direct OE Replacement

SPEED RATING

S-T-H-V

WHEEL DIAMETER

16"-17"-18"-19"-20"-22"

PROXES ST III



STREET/SPORT TRUCK ALL-SEASON

DRY HANDLING	5.0
WET HANDLING	5.0
RIDE COMFORT	3.5
QUIET RIDE	4.5
TREAD LIFE	3.0
OFF-ROAD TRACTION	2.0
WINTER HANDLING	3.0
FUEL EFFICIENCY	3.0

UTQG

500 A A

MILEAGE WARRANTY

40,000 miles*

VEHICLE & APPLICATION SEGMENT

Crossovers
Luxury SUVs
Full-Size SUVs
Full-Size Pickups
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

17"-18"-19"-20"-21"-22"-24"

CELSIUS CUV



CUV/SUV TOURING ALL-WEATHER

DRY HANDLING	4.5
WET HANDLING	4.5
RIDE COMFORT	5.0
QUIET RIDE	4.5
TREAD LIFE	4.5
OFF-ROAD TRACTION	2.0
WINTER HANDLING	5.0
FUEL EFFICIENCY	4.5
SNOW TRACTION	5.0
ICE TRACTION	5.0

UTQG

S-/T-Rated: 520 A B
H-/V-Rated: 500 A A, 520 A A

MILEAGE WARRANTY

60,000 miles*

VEHICLE & APPLICATION SEGMENT

Crossovers
Luxury SUVs
Direct OE Replacement

SPEED RATING

S-T-H-V

WHEEL DIAMETER

16"-17"-18"-19"-20"



OPEN COUNTRY C/T



**ON/OFF-ROAD
COMMERCIAL GRADE**

DRY HANDLING	4.0
WET HANDLING	3.5
RIDE COMFORT	3.0
QUIET RIDE	4.0
TREAD LIFE	5.0
OFF-ROAD TRACTION	4.0
WINTER HANDLING	5.0
FUEL EFFICIENCY	3.0
SNOW TRACTION	5.0

UTQG

N/A

MILEAGE WARRANTY

--

**VEHICLE & APPLICATION
SEGMENT**

Full-Size Pickups
Direct OE Replacement
Plus Sizing

SPEED RATING

Q

WHEEL DIAMETER

16"-17"-18"-20"



M-55



**OFF-ROAD
COMMERCIAL GRADE**

DRY HANDLING	3.5
WET HANDLING	3.5
RIDE COMFORT	2.0
QUIET RIDE	2.5
TREAD LIFE	5.0
OFF-ROAD TRACTION	5.0
WINTER HANDLING	4.5
FUEL EFFICIENCY	2.0
SNOW TRACTION	4.5

UTQG

N/A

MILEAGE WARRANTY

--

**VEHICLE & APPLICATION
SEGMENT**

Full-Size Pickups
Direct OE Replacement

SPEED RATING

Q

WHEEL DIAMETER

15"-16"-17"-18"



H08+



**COMMERCIAL VAN
ALL-SEASON**

DRY HANDLING	4.5
WET HANDLING	4.0
RIDE COMFORT	4.0
QUIET RIDE	4.0
TREAD LIFE	5.0
OFF-ROAD TRACTION	2.5
WINTER HANDLING	4.0
FUEL EFFICIENCY	4.5

UTQG

N/A

MILEAGE WARRANTY

--

**VEHICLE & APPLICATION
SEGMENT**

Commercial Vans

SPEED RATING

R

WHEEL DIAMETER

15"-16"

CELSIUS CARGO



**COMMERCIAL GRADE
ALL-WEATHER TIRE**

DRY HANDLING	4.5
WET HANDLING	4.0
RIDE COMFORT	4.0
QUIET RIDE	4.5
TREAD LIFE	N/A
WINTER HANDLING	4.5
FUEL EFFICIENCY	4.5
SNOW TRACTION	4.5
ICE TRACTION	4.5

UTQG

N/A

MILEAGE WARRANTY

--

**VEHICLE & APPLICATION
SEGMENT**

Modern Commercial Vans
Full-Size Pickups

SPEED RATING

Q-R-S-T

WHEEL DIAMETER

15"-16"-17"-18"-20"



LT / SUV / CUV / COM VAN

LT



DURABLE

LT

LT / SUV / CUV / COM VAN



OFF-ROAD MAXIMUM TRACTION TIRE

The Open Country M/T is legendary for durability, off-road performance, long tread life and an aggressive tread pattern. It's designed to help trucks work hard on pavement and then work just as hard when roads are muddy, snowy and rocky—or when there are no roads at all.



POPULAR FITMENTS

- Chevrolet Trucks
- Ford F-Series
- Jeep
- Nissan Trucks
- Ram Series
- Toyota Trucks

HIGH TURN-UP, 3-PLY
POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance and handling.

OPEN COUNTRY M/T

LT / SUV / CUV / COM VAN

LT

AGGRESSIVE TREAD DESIGN
WITH HOOK-SHAPED BLOCKS

- Delivers excellent off-road traction while maintaining great on-road performance.

OPEN, SCALLOPED
SHOULDER BLOCKS

- Improve off-road traction.
- Enhance grip in muddy, sandy or snowy off-road conditions.
- Eject mud and snow through the open channels.

OVER-THE-SHOULDER TREAD

- Helps to provide traction in deep mud and snow.
- Delivers improved off-road handling in hard turns.

DEEP SIPING IN THE
TREAD BLOCKS

- Helps maintain grip on wet surfaces.



OPEN COUNTRY® M/T

LT

LT / SUV / CUV / COM VAN

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	31X10.50R15LT	109Q	C	BSW	360490	7.0-(8.5)-9.0	57	19.1	31.1	10.7	2270	-	50	667	
	33X10.50R15LT	114P	C	BSW	360470	7.0-(8.5)-9.0	64	19.1	32.8	10.9	2600	-	50	632	
	33X12.50R15LT	108P	C	BSW	360100	8.0-(10.0)-11.0	73	21.0	33.0	12.8	2205	-	35	628	
	33X13.50R15LT	109Q	C	BSW	360290	8.5-(11.0)	76	21.0	33.1	13.9	2270	-	35	628	
	35X13.50R15LT	114Q	C	BSW	361000	8.5-(11.0)	82	21.0	34.8	14.4	2600	-	35	596	
	37X14.50R15LT	120Q	C	BSW	360260	10.0-(12.0)	103	21.0	36.7	15.6	3080	-	35	566	
16	LT235/85R16	120/116P	E	BSW	360440	6.0-(6.5)-7.5	54	18.4	32.0	9.4	3042	2778	80	648	
	LT245/75R16	120/116P	E	BSW	360450	6.5-(7.0)-8.0	52	18.4	30.7	9.9	3042	2778	80	674	
	LT255/85R16 (33X10.00R16)	123/120P	E	BSW	360460	6.5-(7.0)-8.0	61	18.9	33.5	10.2	3415	3085	80	619	
	LT265/75R16	123P	E	BSW	360320	7.0-(7.5)-8.0	61	18.9	31.8	10.8	3415	-	80	651	
	LT285/75R16 (33X11.50R16)	126P	E	BSW	360280	7.5-(8.0)-9.0	67	19.1	33.0	11.6	3740	-	80	628	
	LT305/70R16 (33.0X12.00R16)	124P	E	BSW	360110	8.0-(9.0)-9.5	70	20.0	33.0	12.2	3525	-	65	628	
	LT315/75R16 (35X12.50R16)	127Q	E	BSW	360230	8.0-(8.5)-10.0	81	21.0	34.9	12.9	3860	-	65	595	
LT385/70R16 (38X14.50R16)	130Q	D	BSW	360480	10.0-(11.0)-12.0	102	21.0	37.7	15.6	4190	-	50	550		
17	LT255/75R17	111/108Q	C	BSW	360790	6.5-(7.0)-8.5	57	18.3	32.3	10.0	2405	2205	50	643	
	LT255/80R17	121/118Q	E	BSW	361110	6.5-(7.0)-8.5	61	18.3	33.3	10.0	3195	2910	80	624	
	LT265/70R17	121P	E	BSW	360130	7.0-(8.0)-8.5	59	18.9	32.0	10.8	3195	-	80	648	
	LT285/70R17	116/113Q	C	BSW	361100	7.5-(8.5)-9.0	65	18.9	33.0	11.5	2755	2535	50	630	
	LT285/70R17	121/118P	E	BSW	360650	7.5-(8.5)-9.0	64	18.9	33.0	11.5	3195	2910	80	630	
	LT285/75R17	117/114Q	C	BSW	361310	7.5-(8.0)-9.5	67	19.1	34.1	11.3	2835	2600	50	609	
	LT285/75R17 (34X11.50R17)	121P	E	BSW	360430	7.5-(8.0)-9.5	69	19.1	34.1	11.6	3195	-	80	608	
	LT295/70R17 (33X11.50R17)	128P	E	BSW	360360	7.5-(8.5)-10.0	68	19.4	33.5	12.0	3970	-	80	619	
	LT315/70R17	113/110Q	C	BSW	361150	8.0-(9.5)-11.0	76	20.2	34.6	12.7	2535	2335	35	600	
	LT315/70R17	121/118Q	E	BSW	360780	8.0-(9.5)-11.0	78	20.2	34.6	12.7	3195	2910	65	600	
	33X12.50R17LT	120Q	E	BSW	360760	8.5-(10.0)-11.0	71	21.0	32.8	12.5	3085	-	65	634	
	35X12.50R17LT	125Q	E	BSW	360310	8.5-(10.0)-11.0	78	21.0	34.8	13.2	3640	-	65	596	
	37X12.50R17LT	124Q	D	BSW	360770	8.5-(10.0)-11.0	84	21.0	36.8	12.5	3525	-	50	565	
	37X13.50R17LT	131Q	E	BSW	360270	8.5-(11.0)	94	21.0	37.0	14.6	4300	-	65	560	
40X13.50R17LT	121Q	C	BSW	361010	8.5-(11.0)	104	21.0	39.7	14.4	3195	-	35	522		
18	LT265/70R18	124/121Q	E	BSW	361090	7.0-(8.0)-9.0	60	18.9	32.9	10.7	3525	3195	80	632	
	LT275/65R18	123/120P	E	BSW	360620	7.5-(8.0)-9.0	63	18.9	32.3	11.0	3415	3085	80	643	
	LT275/70R18 (33X11.00R18)	125P	E	BSW	360120	7.0-(8.0)-8.5	65	19.1	33.6	11.0	3640	-	80	617	
	LT285/65R18	125/122Q	E	BSW	361300	(8.5)-10.0	67	19.0	32.8	11.5	3640	3305	80	633	
	LT285/70R18 (34X11.50R18)	127/124Q	E	BSW	360590	7.5-(8.5)-9.5	70	18.9	34.1	11.4	3860	3525	80	609	
	LT285/75R18 (35X11.5R18)	129P	E	BSW	360420	7.5-(8.0)-9.5	72	19.1	35.1	11.6	4080	-	80	591	
	LT295/70R18	129/126P	E	BSW	360640	7.5-(8.5)-10.0	72	19.4	34.5	11.8	4080	3750	80	602	
	LT305/65R18	128/125Q	F	BSW	361140	8.5-(9.0)-11.0	71	19.5	33.8	12.2	3970	3640	80	614	
	LT315/70R18 (36X13.00R18)	127/124Q	E	BSW	360560	8.0-(9.5)-11.0	81	20.7	35.7	13.0	3860	3525	65	581	
	33X12.50R18LT	118Q	E	BSW	360340	8.5-(10.0)-11.0	74	21.0	33.0	12.7	2910	-	65	630	
	33X12.50R18LT	122Q	F	BSW	360810	8.5-(10.0)-11.0	74	21.0	32.8	12.5	3305	-	80	634	
	35X12.50R18LT	123Q	E	BSW	360090	8.5-(10.0)-11.0	81	21.0	35.0	13.2	3415	-	65	593	
	35X12.50R18LT	128Q	F	BSW	360820	8.5-(10.0)-11.0	81	21.0	34.8	12.5	3970	-	80	598	
	37X13.50R18LT	124Q	D	BSW	360300	8.5-(11.0)	90	21.0	37.0	14.2	3525	-	50	560	
38X13.50R18LT	126Q	D	BSW	360380	8.5-(11.0)	92	21.0	37.7	14.3	3750	-	50	550		
38X15.50R18LT	128Q	D	BSW	360180	11.0-(12.0)-13.0	103	21.0	37.7	15.9	3970	-	50	550		

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
20	LT275/55R20	115/112P	D	BSW	360670	7.5-(8.5)-9.5	64	19.1	32.1	11.2	2680	2470	65	647
	LT275/65R20 (34X11.00R20)	126P	E	BSW	360410	7.5-(8.0)-9.5	67	19.1	34.5	11.0	3750	-	80	601
	LT285/60R20	125/122Q	E	BSW	361040	8.0-(8.5)-10.0	69	18.9	33.5	11.5	3640	3305	80	621
	LT295/55R20	123/120P	E	BSW	360610	8.0-(9.5)-10.0	68	19.4	33.0	12.2	3415	3085	80	630
	LT295/60R20	126/123P	E	BSW	360660	8.0-(8.5)-10.0	75	19.4	34.2	11.8	3750	3415	80	608
	LT295/65R20	129/126P	E	BSW	360630	8.0-(8.5)-10.0	72	19.4	35.4	11.8	4080	3750	80	588
	LT305/55R20	125/122Q	F	BSW	360870	8.5-(9.5)-11.0	70	19.5	33.5	12.4	3640	3305	80	621
	LT315/60R20 (35X12.50R20)	125Q	E	BSW	360510	8.5-(9.5)-11.0	78	20.7	35.0	12.6	3640	3305	65	593
	33X12.50R20LT	114Q	E	BSW	360330	8.5-(10.0)-11.0	73	21.0	33.0	12.6	2600	-	65	630
	33X12.50R20LT	119Q	F	BSW	360830	8.5-(10.0)-11.0	73	21.0	32.8	12.5	3000	-	80	634
	35X12.50R20LT	121Q	E	BSW	360240	8.5-(10.0)-11.0	79	21.0	35.0	13.0	3195	-	65	592
	35X12.50R20LT	125Q	F	BSW	360800	8.5-(10.0)-11.0	79	21.0	34.8	12.5	3640	-	80	598
	35X13.50R20LT	126Q	F	BSW	360860	9.5-(10.0)-12.0	78	21.0	34.8	13.6	3750	-	80	598
	35X15.50R20LT	127Q	F	BSW	361280	11.0-(12.5)-14.0	87	21.0	34.8	15.6	3860	-	80	598
	37X12.50R20LT	126Q	E	BSW	360750	8.5-(10.0)-11.0	85	21.0	36.8	12.5	3750	-	65	565
	37X13.50R20LT	127Q	E	BSW	360220	8.5-(11.0)	92	21.0	37.0	14.0	3860	-	65	560
	38X13.50R20LT	124Q	D	BSW	360390	8.5-(11.0)	95	21.0	37.7	14.3	3525	-	50	550
	38X15.50R20LT	125Q	D	BSW	360190	11.0-(12.0)-13.0	101	21.0	37.7	15.9	3640	-	50	550
40X15.50R20LT	130Q	D	BSW	360370	11.0-(12.0)-13.0	109	21.0	39.7	15.9	4190	-	50	522	
22	LT295/55R22	125/122Q	E	BSW	361130	8.0-(9.5)-10.5	74	19.5	35.0	12.2	3640	3305	80	594
	LT325/50R22	122Q	E	BSW	360880	9.0-(10.0)-12.0	78	20.2	35.1	13.2	3305	-	65	592
	LT325/50R22	127Q	F	BSW	361120	9.0-(10.0)-12.0	73	20.2	35.1	13.2	3860	-	80	592
	33X12.50R22LT	109Q	E	BSW	360520	8.5-(10.0)-11.0	65	18.9	33.0	12.4	2270	-	65	629
	33X12.50R22LT	114Q	F	BSW	360840	8.5-(10.0)-11.0	65	18.9	32.8	12.5	2600	-	80	634
	35X12.50R22LT	117Q	E	BSW	360540	8.5-(10.0)-11.0	73	21.0	35.0	12.8	2835	-	65	593
	35X12.50R22LT	121Q	F	BSW	360850	8.5-(10.0)-11.0	72	21.0	34.8	12.5	3195	-	80	598
	LT375/45R22	128Q	F	BSW	361290	12.0-(12.5)-14.0	94	19.5	35.6	14.8	3970	-	80	584
	37X12.50R22LT	127Q	F	BSW	361050	9.0-(10.0)-11.5	86	21.0	36.8	12.5	3860	-	80	565
	37X13.50R22LT	123Q	E	BSW	360210	8.5-(11.0)	84	21.0	37.0	14.0	3420	-	65	560
	37X13.50R22LT	128Q	F	BSW	361160	8.5-(11.0)	85	21.0	36.8	13.6	3970	-	80	565
	38X15.50R22LT	128Q	E	BSW	360980	11.0-(12.5)-14.0	99	21.0	37.8	15.6	3970	-	65	550
	40X15.50R22LT	127Q	D	BSW	360200	11.0-(12.0)-13.0	109	21.0	39.7	15.9	3860	-	50	522
	24	LT375/40R24	126Q	F	BSW	361170	12.5-(13.5)-15.0	90	19.5	36.1	15.2	3750	-	80
37X13.50R24LT		120Q	E	BSW	360350	8.5-(11.0)	90	21.0	37.0	13.6	3085	-	65	561
40X15.50R24LT		128P	E	BSW	360680	11.0-(12.0)-14.0	106	21.0	39.8	15.4	3970	-	65	522
26	40X15.50R26LT	126Q	E	BSW	360970	11.0-(12.5)-14.0	108	21.0	39.8	15.6	3750	-	65	522
	42X15.50R26LT	126Q	D	BSW	361190	11.0-(12.5)-14.0	110	21.0	41.8	15.6	3750	-	50	497



LT
LT / SUV / CUV / COM VAN

ON/OFF-ROAD RUGGED TERRAIN TIRE

Off-road performance meets on-road comfort with the Open Country R/T. Built rugged for any terrain, this powerful 4x4 tire offers excellent off-road traction, durable construction and aggressive styling. Its ability to tackle dirt, sand and rocks is inspired by the legendary Open Country M/T, while its quieter ride is a nod to our best-selling Open Country A/T II.

LT

LT / SUV / CUV / COM VAN

MILEAGE WARRANTY*

45,000-miles

POPULAR FITMENTS

Chevrolet Trucks
Ford F-Series
Jeep
Nissan Trucks
Ram Series
Toyota Trucks



HIGH TURN-UP, 3-PLY POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance and handling.

OPTIMIZED PATTERN ARRANGEMENT

- Reduces noise for improved driving comfort.

AGGRESSIVE SIDEWALL DESIGNS WITH DURABLE SIDEWALL COMPOUND

- Enhance traction and side impact protection.
- Offer customization with a distinct look on each side of the tire.

OPEN, SCALLOPED SHOULDER BLOCKS

- Improve off-road traction.
- Enhance grip in muddy, sandy or snowy off-road conditions.
- Eject mud and snow through the open channels.

STONE AND MUD EJECTORS

- Force stones and mud from grooves.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX. LOAD (LBS) SINGLE	MAX. LOAD (LBS) DUAL	MAX. PRESSURE (PSI)	REVS PER MILE	
15	31X10.50R15LT	109Q	C	BSW	351360	7.0-(8.5)-9.0	56	18.9	30.5	10.6	2270	-	50	681	
16	LT265/75R16	123/120Q	E	BSW	350720	7.0-(7.5)-8.0	53	16.4	31.9	10.5	3415	3085	80	651	
	LT285/75R16	126/123Q	E	BSW	351640	7.5-(8.0)-9.0	59	16.4	32.8	11.3	3750	3415	80	633	
	LT305/70R16	124/121Q	E	BSW	351670	8.0-(9.0)-9.5	63	16.4	32.8	12.2	3525	3195	65	633	
	LT315/75R16	127/124Q	E	BSW	351650	8.0-(8.5)-11.0	67	16.4	34.6	12.3	3860	3525	65	601	
17	LT255/80R17	121/118Q	E	BSW	351630	6.5-(7.0)-8.5	56	16.4	33.1	10.0	3195	2910	80	628	
	LT265/70R17	121/118Q	E	BSW	353460	7.0-(8.0)-8.5	56	16.4	31.7	10.7	3195	2910	80	656	
	LT285/70R17	121/118Q	E	BSW	350160	7.5-(8.5)-9.0	60	16.4	33.0	11.5	3195	2910	80	630	
	P285/70R17	117S	SL	BSW	353820	7.5-(8.5)-9.5	49	13.5	32.8	11.5	2833	-	44	634	
	LT285/75R17	121/118Q	E	BSW	353480	7.5-(8.0)-9.5	62	16.4	33.9	11.3	3195	2910	80	614	
	LT295/70R17	121/118Q	E	BSW	351210	7.5-(8.5)-10.0	64	16.4	33.3	11.8	3195	2910	80	624	
	LT305/70R17	121/118Q	E	BSW	353540	8.0-(9.0)-9.5	65	16.4	33.9	12.2	3195	2910	65	614	
	LT315/70R17	113/110S	C	BSW	353550	8.0-(9.5)-11.0	68	16.4	34.4	12.7	2535	2335	35	604	
	33X12.50R17LT	114Q	D	BSW	353570	8.5-(10.0)-11.0	67	18.9	32.8	12.5	2600	-	50	634	
	35X12.50R17LT	121Q	E	BSW	350210	8.5-(10.0)-11.0	74	18.9	34.8	12.5	3195	-	65	598	
	37X12.50R17LT	124Q	D	BSW	350700	8.5-(10.0)-11.0	78	18.9	36.8	12.5	3525	-	50	565	
	37X13.50R17LT	121Q	D	BSW	350670	8.5-(11.0)	84	18.9	36.8	13.6	3195	-	50	565	
	18	265/65R18	114T	SL	BSW	353830	7.5-(8.0)-9.5	43	13.5	31.5	10.7	2601	-	44	659
		LT275/65R18	123/120Q	E	BSW	353470	7.5-(8.0)-9.0	58	16.4	32.1	11.0	3415	3085	80	647
		LT275/70R18	125/122Q	E	BSW	351220	7.0-(8.0)-8.5	61	16.4	33.2	11.0	3640	3305	80	626
		275/65R18	116T	SL	BSW	353840	7.5-(8.0)-9.5	45	13.5	32.1	11.0	2756	-	44	647
LT285/60R18		122/119Q	E	BSW	351280	8.0-(8.5)-10.0	58	16.4	31.5	11.5	3305	3000	80	660	
LT285/65R18		125/122Q	E	BSW	350260	8.0-(8.5)-10.0	59	16.4	32.8	11.5	3640	3305	80	633	
LT285/75R18		129/126Q	E	BSW	351250	7.5-(8.0)-9.5	66	16.4	34.8	11.3	4080	3750	80	596	
LT295/70R18		129/126Q	E	BSW	353530	7.5-(8.5)-10.0	65	16.4	34.3	11.8	4080	3750	80	606	
33X12.50R18LT		118Q	E	BSW	350220	8.5-(10.0)-11.0	65	18.9	32.8	12.5	2910	-	65	634	
35X12.50R18LT		123Q	E	BSW	350170	8.5-(10.0)-11.0	77	18.9	34.8	12.5	3415	-	65	598	
37X12.50R18LT		128Q	E	BSW	353590	8.5-(10.0)-11.0	79	18.9	36.8	12.5	3970	-	65	565	
37X13.50R18LT		124Q	D	BSW	351270	8.5-(11.0)	85	18.9	36.8	13.6	3525	-	50	565	
20		LT275/65R20	126/123Q	E	BSW	351200	7.5-(8.0)-9.5	60	16.4	34.1	11.0	3750	3415	80	609
		275/55R20	117T	XL	BSW	353850	7.5-(8.5)-9.5	47	13.5	31.9	11.2	2833	-	50	651
	275/60R20	115T	SL	BSW	353860	7.5-(8.0)-9.5	47	13.5	33.0	11.0	2679	-	44	630	
	305/55R20	116Q	SL	BSW	353870	8.5-(9.5)-11.0	52	13.5	33.2	12.4	2756	-	44	625	
	LT285/55R20	122/119Q	E	BSW	351240	8.0-(9.0)-10.0	60	16.4	32.4	11.7	3305	3000	80	642	
	LT285/60R20	125/122Q	E	BSW	351690	8.0-(8.5)-10.0	62	16.4	33.5	11.5	3640	3305	80	621	
	LT295/55R20	123/120Q	E	BSW	351620	8.0-(9.5)-10.0	64	16.4	32.8	12.2	3415	3085	80	634	
	LT295/60R20	126/123Q	E	BSW	353510	8.0-(8.5)-10.0	67	16.4	33.9	11.8	3750	3415	80	612	
	LT295/65R20	129/126Q	E	BSW	353520	8.0-(8.5)-10.0	69	16.4	35.1	11.8	4080	3750	80	592	
	LT305/55R20	121/118Q	E	BSW	351230	8.5-(9.5)-11.0	67	16.4	33.2	12.4	3195	2919	65	625	
	LT305/55R20	125/122Q	F	BSW	351480	8.5-(9.5)-11.0	65	16.4	33.2	12.4	3640	3305	80	625	
	LT315/60R20	125/122Q	E	BSW	351660	8.5-(9.5)-11.0	72	16.4	34.9	12.7	3640	3305	65	596	
	LT325/60R20	126/123Q	E	BSW	351680	9.0-(9.5)-12.0	75	16.4	35.4	13.0	3750	3415	65	588	
	33X12.50R20LT	114Q	E	BSW	350180	8.5-(10.0)-11.0	69	18.9	32.8	12.5	2600	-	65	634	
	35X11.50R20LT	124Q	E	BSW	353580	8.0-(9.0)-10.5	68	18.9	34.8	11.4	3525	-	80	598	
	35X12.50R20LT	121Q	E	BSW	350190	8.5-(10.0)-11.0	75	18.9	34.8	12.5	3195	-	65	598	
	35X12.50R20LT	125Q	F	BSW	351470	8.5-(10.0)-11.0	71	18.9	34.8	12.5	3640	-	80	598	
	35X13.50R20LT	121Q	E	BSW	350690	9.5-(11.0)-12.0	76	18.9	34.8	13.6	3195	-	65	598	
	37X12.50R20LT	126Q	E	BSW	350230	8.5-(10.0)-11.0	81	18.9	36.8	12.5	3750	-	65	565	
	37X13.50R20LT	127Q	E	BSW	350680	8.5-(11.0)	82	18.9	36.8	13.6	3860	-	65	565	
38X13.50R20LT	128Q	E	BSW	353600	9.5-(11.0)-12.0	86	18.9	37.8	13.6	3970	-	65	550		
22	LT295/50R22	122/119Q	E	BSW	353490	8.0-(9.5)-10.5	74	16.4	33.7	12.2	3305	3000	80	617	
	LT295/55R22	125/122Q	E	BSW	353500	8.0-(9.5)-10.5	67	16.4	34.8	12.2	3640	3305	80	598	
	LT325/50R22	127Q	F	BSW	353560	9.0-(10.0)-12.0	78	16.4	34.8	13.2	3860	-	80	596	
	35X12.50R22LT	117Q	E	BSW	350710	8.5-(10.0)-11.0	67	18.9	34.8	12.5	2835	-	65	598	
	37X12.50R22LT	123Q	E	BSW	350730	9.0-(10.0)-11.5	77	18.9	36.8	12.5	3415	-	65	565	
	37X13.50R22LT	123Q	E	BSW	351260	8.5-(11.0)	81	18.9	36.8	13.6	3415	-	65	565	
	38X13.50R22LT	126Q	E	BSW	353610	9.5-(11.0)-12.0	88	18.9	37.8	13.6	3760	-	65	550	
	38X15.50R22LT	128Q	E	BSW	353620	11.0-(12.5)-14.0	92	18.9	37.8	15.6	3970	-	65	550	
24	37X13.50R24LT	124Q	F	BSW	353730	9.5-(11.0)-12.0	87	18.9	36.8	13.6	3525	-	80	565	
	38X15.50R24LT	128Q	F	BSW	353740	11.0-(12.5)-14.0	100	18.9	37.8	15.6	3970	-	80	550	

Speed rated "Q" = 99mph, "D" = 8-ply rating, "E" = 10-ply rating, "F" = 12-ply rating, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

LT / SUV / CUV / COM VAN

LT

LT

LT / SUV / CUV / COM VAN



ON/OFF-ROAD ALL-TERRAIN TIRE

The Open Country A/T III is a revolutionary new all-terrain tire that delivers gripping off-road traction with responsive and predictable on-road handling. With a strong focus on wet performance, durability and treadwear life, and using Toyo's proprietary T-mode tire development and modeling technologies, Toyo introduces advances in tread design, construction and all-new compounding. The Open Country A/T III provides a quiet ride with exceptional stability, instilling driving confidence no matter the terrain. The Open Country A/T III is built to be tough and offers peace of mind and the durability to safely get there and get back home, regardless of terrain or weather. And with a treadwear warranty of up to 65,000-miles, outdoor adventurers can rely on the Open Country A/T III for the long haul.

MILEAGE WARRANTY*

P-/Euro-Metric Sizes: 65,000-miles
LT Sizes: 50,000-miles



POPULAR FITMENTS

Chevrolet & GMC Trucks, SUVs and CUVs
Ford F-Series, CUVs and SUVs
Jeep
Ram Series
Toyota Trucks, SUVs and CUVs
Nissan Trucks, SUVs and CUVs

UTQG

P-/Euro-Metric Sizes:
• S-/T-Rated: 600 A B
• H-Rated: 600 A A



Three-Peak Mountain Snowflake qualified for severe snow conditions.

NEW TREAD COMPOUND AND DESIGN

- Provides confident wet braking and handling.
- Provides cut-and-chip resistance.
- Provides excellent off-road grip.
- Delivers a quiet and comfortable ride.

OPEN COUNTRY A/T III

LT / SUV / CUV / COM VAN

LT

MORE EVENLY DISTRIBUTED VOID AREA

- Enhances on and off-road traction.
- Increases tread block rigidity for excellent handling stability.
- Provides better worn appearance.

STAGGERED SHOULDER LUGS

- Enhance off-road traction with biting edges.

INCREASED LATERAL GROOVES

- Enhance traction on all surfaces, including snow.

3D MULTI-WAVE SIPES

- Enhance wet and snow traction.
- Reduce irregular wear.

STONE-EJECTING BLOCKS

- Eject stones from grooves.



OPEN COUNTRY® A/T III

LT

LT / SUV / CUV / COM VAN

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX. LOAD (LBS) SINGLE	MAX. LOAD (LBS) DUAL	MAX. PRESSURE (PSI)	REVS PER MILE
15		P215/75R15	100T	SL	OWL	356060	5.5-(6.0)-7.0	28	12.7	27.7	8.5	1742	-	44	751
		P225/75R15	102T	SL	BSW	356070	(6.0)-7.5	29	12.9	28.3	8.8	1874	-	44	734
		P235/75R15	108T	XL	OWL	356080	6.0-(6.5)-8.0	32	13.0	28.9	9.3	2183	-	50	720
		LT235/75R15	104/101S	C	OWL	355610	6.0-(6.5)-8.0	37	16.0	29.1	9.3	1985	1820	50	714
		P265/75R15	112S	SL	OWL	355280	7.0-(7.5)-9.0	38	13.4	30.7	10.5	2469	-	44	677
		30X9.50R15LT	104S	C	OWL	356050	6.0-(7.5)-8.0	40	15.6	29.8	9.4	1985	-	50	698
		31X10.50R15LT	109S	C	OWL	355910	7.0-(8.5)-9.0	43	15.6	30.7	10.6	2270	-	50	676
16		215/65R16	102T	XL	BSW	356380	6.0-(6.5)-7.5	28	12.7	27.0	8.7	1874	-	50	769
		215/70R16	100T	SL	BSW	356090	5.5-(6.5)-7.0	29	12.7	27.9	8.7	1764	-	44	745
		LT215/85R16	115/112Q	E	BSW	355760	5.5-(6.0)-7.0	40	15.7	30.4	8.5	2680	2470	80	683
		225/70R16	103T	SL	OWL	356100	6.0-(6.5)-7.5	30	12.9	28.4	9.0	1929	-	44	731
		P225/75R16	104S	SL	BSW	355260	(6.0)-7.5	30	12.9	29.3	8.8	1984	-	44	709
		LT225/75R16	115/112Q	E	BSW	355600	(6.0)-7.5	38	15.9	29.3	8.8	2680	2470	80	709
		235/70R16	106T	SL	BSW	356110	6.0-(7.0)-8.0	32	13.0	29.0	9.4	2094	-	44	717
		235/70R16	106T	SL	OWL	356120	6.0-(7.0)-8.0	32	13.0	29.0	9.4	2094	-	44	717
		LT235/85R16	120/116R	E	BSW	355770	6.0-(6.5)-7.5	44	16.0	31.7	9.3	3042	2778	80	655
		P245/70R16	106S	SL	OWL	355210	6.5-(7.0)-8.0	35	13.1	29.5	9.8	2094	-	44	704
		P245/70R16	106S	SL	BSW	355220	6.5-(7.0)-8.0	34	13.1	29.5	9.8	2094	-	44	704
		LT245/75R16	120/116S	E	BSW	355620	6.5-(7.0)-8.0	44	16.1	30.5	9.8	3042	2778	80	682
		LT245/75R16	120/116S	E	OWL	355630	6.5-(7.0)-8.0	44	16.1	30.7	9.8	3042	2778	80	676
		245/75R16	111T	SL	OWL	356140	6.5-(7.0)-8.0	35	13.1	30.5	9.8	2403	-	44	682
		245/75R16	111T	SL	BSW	356130	6.5-(7.0)-8.0	36	13.1	30.5	9.8	2403	-	44	682
		255/65R16	109T	SL	BSW	356150	7.0-(7.5)-9.0	33	13.2	29.1	10.2	2271	-	44	715
		255/70R16	115T	XL	BSW	356160	6.5-(7.5)-8.5	38	13.2	30.1	10.2	2679	-	50	691
		255/70R16	115T	XL	OWL	356170	6.5-(7.5)-8.5	37	13.2	30.1	10.2	2679	-	50	691
		P265/70R16	111T	SL	OWL	355230	7.0-(8.0)-9.0	39	13.4	30.6	10.7	2403	-	44	678
		P265/70R16	111T	SL	BSW	355240	7.0-(8.0)-9.0	40	13.4	30.6	10.7	2403	-	44	678
		LT265/75R16	123/120R	E	BSW	355650	7.0-(7.5)-9.0	50	16.3	31.7	10.5	3415	3085	80	656
		LT265/75R16	123/120R	E	OWL	355660	7.0-(7.5)-9.0	48	16.3	31.9	10.5	3415	3085	80	651
		265/75R16	116T	SL	BSW	356180	7.0-(7.5)-9.0	41	13.4	31.7	10.5	2756	-	44	656
	265/75R16	116T	SL	OWL	356190	7.0-(7.5)-9.0	41	13.4	31.7	10.5	2756	-	44	656	
	LT285/75R16	126/123R	E	OWL	355670	7.5-(8.0)-9.5	56	16.5	33.1	11.3	3750	3415	80	628	
	LT285/75R16	126/123R	E	BSW	355680	7.5-(8.0)-9.5	59	16.5	32.8	11.3	3750	3415	80	633	
	LT295/75R16	128/125R	E	BSW	355720	7.5-(8.0)-10.0	62	16.6	33.4	11.6	3970	3640	80	622	
	LT305/70R16	124/121R	E	BSW	355570	8.0-(9.0)-10.0	63	16.8	32.8	12.2	3525	3195	65	633	
	LT315/75R16	127/124R	E	BSW	355730	8.0-(8.5)-10.5	66	16.9	34.6	12.3	3860	3525	65	601	
17		215/65R17	103T	XL	BSW	355890	6.0-(6.5)-7.5	29	12.7	28.0	8.7	1929	-	44	741
		225/60R17	103T	XL	BSW	356390	6.0-(6.5)-8.0	30	12.9	27.6	9.0	1929	-	50	752
		225/65R17	102T	SL	BSW	356400	6.0-(6.5)-8.0	30	12.9	28.5	9.0	1874	-	44	729
		235/65R17	108H	XL	BSW	356200	6.5-(7.0)-8.5	33	13.0	29.1	9.4	2205	-	50	715
		P235/75R17	108S	SL	BSW	355270	6.0-(6.5)-8.0	35	13.0	30.9	9.3	2205	-	44	673
		LT235/80R17	120/117R	E	BSW	355740	6.0-(6.5)-8.0	43	16.0	31.8	9.3	3085	2835	80	653
		245/65R17	111T	XL	BSW	356210	(7.0)-8.5	34	13.1	29.5	9.8	2403	-	50	704
		245/65R17	111T	XL	OWL	356220	(7.0)-8.5	34	13.1	29.5	9.8	2403	-	50	704
		LT245/65R17	111/108T	D	BSW	356520	(7.0)-8.5	41	16.1	29.5	9.8	2405	2205	65	704
		LT245/70R17	119/116R	E	BSW	355470	6.5-(7.0)-8.0	42	16.1	30.6	9.8	3000	2755	80	680
		245/70R17	110T	SL	BSW	356230	6.5-(7.0)-8.0	35	13.1	30.6	9.8	2337	-	44	680
		LT245/75R17	121/118S	E	BSW	355640	6.5-(7.0)-8.0	44	16.1	31.5	9.8	3195	2910	80	660

Speed Rated "Q" = 99mph, "R" = 106mph, "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "SL" = Standard Load, "RD" = Reinforced, "C" = 6-ply rating, "D" = 8-ply rating, "E" = 10-ply rating, "F" = 12 ply, "BSW" = Black Sidewall, "OWL" = Outline White Lettering, Bold designates measuring rim width. *Inflated dimensions.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	REVS PER MILE	
17	255/70R17	112T	SL	BSW	356240	6.5-(7.5)-8.5	38	13.2	31.1	10.2	2469	-	44	668
	LT255/80R17	121/118R	E	BSW	355750	6.5-(7.0)-8.5	51	16.3	33.1	10.0	3195	2910	80	628
	265/65R17	116T	XL	BSW	356250	7.5-(8.0)-9.5	38	13.4	30.6	10.7	2756	-	50	680
	LT265/70R17	121/118S	E	BSW	355480	7.0-(8.0)-9.0	48	16.3	31.7	10.7	3195	2910	80	656
	LT265/70R17	121/118S	E	OWL	355490	7.0-(8.0)-9.0	48	16.3	31.7	10.7	3195	2910	80	656
	265/70R17	115T	SL	BSW	356260	7.0-(8.0)-9.0	40	13.4	31.7	10.7	2679	-	44	656
	265/70R17	115T	SL	OWL	356270	7.0-(8.0)-9.0	42	13.4	31.7	10.7	2679	-	44	656
	P285/70R17	117T	SL	BSW	355250	7.5-(8.5)-9.5	46	13.6	32.8	11.5	2833	-	44	634
	LT275/70R17	124/121T	E	BSW	356550	7.0-(8.0)-9.0	51	16.4	32.2	11.0	3525	3195	80	645
	LT285/70R17	116/113Q	C	BSW	355530	7.5-(8.5)-9.5	55	16.5	32.8	11.5	2755	2535	50	634
	LT285/70R17	121/118S	E	OWL	355540	7.5-(8.5)-9.5	53	16.5	33.0	11.5	3195	2910	80	630
	LT285/70R17	121/118S	E	BSW	355550	7.5-(8.5)-9.5	55	16.5	32.8	11.5	3195	2910	80	634
	LT285/75R17	121/118S	E	BSW	355700	7.5-(8.0)-9.5	60	16.5	33.9	11.3	3195	2910	80	614
	LT285/75R17	117/114Q	C	BSW	355690	7.5-(8.0)-9.5	59	16.5	33.9	11.3	2835	2600	50	614
	LT305/70R17	121/118R	E	BSW	355580	8.0-(9.0)-10.0	64	16.8	33.9	12.2	3195	2910	65	614
	LT315/70R17	121/118S	D	BSW	355590	8.0-(9.5)-10.5	67	16.9	34.4	12.7	3195	2910	50	604
	35X11.50R17LT	118Q	C	BSW	355920	7.5-(9.0)-10.0	63	16.9	34.5	11.4	2910	-	50	602
	35X12.50R17LT	111Q	C	BSW	356540	8.0-(10.0)-10.5	59	16.9	34.5	12.5	2405	-	35	602
	35X12.50R17LT	121R	E	BSW	355960	8.0-(10.0)-10.5	65	16.9	34.5	12.5	3195	-	65	602
	18	225/55R18	102H	XL	BSW	355830	6.0-(7.0)-8.0	30	12.9	27.8	9.2	1874	-	50
225/60R18		104T	XL	BSW	356410	6.0-(6.5)-8.0	32	12.9	28.6	9.0	1984	-	50	726
235/60R18		107T	XL	BSW	355860	6.5-(7.0)-8.5	33	13.0	29.1	9.4	2149	-	50	714
235/65R18		110T	XL	BSW	355900	6.5-(7.0)-8.5	34	13.0	30.0	9.4	2337	-	50	692
245/60R18		109T	XL	BSW	355870	(7.0)-8.5	35	13.1	29.6	9.8	2271	-	50	703
255/55R18		109H	XL	BSW	355840	7.0-(8.0)-9.0	36	13.2	29.0	10.4	2271	-	50	716
255/70R18		113T	SL	BSW	356280	6.5-(7.5)-8.5	39	13.2	32.1	10.2	2535	-	44	647
265/60R18		110T	SL	BSW	356290	7.5-(8.0)-9.5	38	13.4	30.5	10.7	2337	-	44	681
265/65R18		114T	SL	BSW	356300	7.5-(8.0)-9.5	39	13.4	31.5	10.7	2601	-	44	659
LT265/70R18		124/121Q	E	BSW	355500	7.0-(8.0)-9.0	51	16.3	32.6	10.7	3525	3195	80	636
265/70R18		116T	SL	BSW	356310	7.0-(8.0)-9.0	43	13.4	32.6	10.7	2756	-	44	636
LT275/65R18		113/110T	C	OWL	355380	(8.0)-9.5	51	16.4	32.3	11.0	2535	2335	50	643
LT275/65R18		123/120S	E	BSW	355400	(8.0)-9.5	52	16.4	32.1	11.0	3415	3085	80	647
LT275/65R18		123/120S	E	OWL	355410	(8.0)-9.5	51	16.4	32.3	11.0	3415	3085	80	643
LT275/65R18		113/110T	C	BSW	355390	(8.0)-9.5	51	16.4	32.1	11.0	2535	2335	50	647
275/65R18		116T	SL	BSW	356320	7.5-(8.0)-9.5	42	13.5	32.1	11.0	2756	-	44	647
LT275/70R18		125/122S	E	OWL	355520	7.0-(8.0)-9.0	52	16.4	33.2	11.0	3640	3305	80	626
LT275/70R18		125/122S	E	BSW	355510	7.0-(8.0)-9.0	53	16.4	33.2	11.0	3640	3305	80	626
285/60R18		120S	XL	BSW	355880	8.0-(8.5)-10.0	44	13.6	31.5	11.5	3086	-	50	660
LT285/65R18		125/122S	E	BSW	355430	(8.5)-10.0	55	16.5	32.6	11.5	3640	3305	80	638
LT285/75R18		129/126S	E	BSW	355710	7.5-(8.0)-9.5	65	16.5	34.8	11.3	4080	3750	80	596
LT295/70R18		129/126S	E	BSW	355560	7.5-(8.5)-10.0	63	16.6	34.3	11.8	4080	3750	80	606
LT305/65R18		128/125Q	F	BSW	355450	(9.0)-11.0	65	16.8	33.6	12.2	3970	3640	80	619
LT325/60R18		124/121S	E	BSW	355360	(9.5)-11.5	66	17.0	33.3	13.0	3525	3195	65	623
LT325/65R18		127/124R	E	BSW	355460	(9.5)-11.5	72	17.0	34.6	13.0	3860	3525	65	600
33X12.50R18LT		122Q	F	BSW	355930	8.5-(10.0)-11.0	65	16.9	32.5	12.5	3305	-	80	639
35X12.50R18LT		128Q	F	BSW	355970	8.5-(10.0)-11.0	75	16.9	34.5	12.5	3970	-	80	602
35X12.50R18LT		118R	D	BSW	356330	8.5-(10.0)-11.0	66	16.9	34.5	12.5	2910	-	50	602
37X12.50R18LT		128Q	E	BSW	356010	8.0-(10.0)-10.5	71	16.9	36.5	12.5	3970	-	65	569
19		255/55R19	111H	XL	BSW	356420	7.0-(8.0)-9.0	37	13.2	30.0	10.4	2403	-	50
	255/60R19	113H	XL	BSW	356450	7.0-(7.5)-9.0	41	13.2	31.1	10.2	2535	-	50	669

LT / SUV / CUV / COM VAN

LT

OPEN COUNTRY® A/T III

LT

LT / SUV / CUV / COM VAN

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEMALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)†	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE	
20	245/50R20	105H	XL	BSW	355790	7.0-(7.5)-8.5	35	13.1	29.7	10.0	2039	-	50	700	
	P245/60R20	107T	SL	BSW	355200	(7.0)-8.5	37	13.1	31.6	9.8	2149	-	44	658	
	255/50R20	109T	XL	BSW	355800	7.0-(8.0)-9.0	37	13.2	30.1	10.4	2271	-	50	691	
	255/55R20	110H	XL	BSW	356430	7.0-(8.0)-9.0	37	13.2	31.0	10.4	2337	-	50	670	
	265/50R20	111T	XL	BSW	355810	7.5-(8.5)-9.5	39	13.4	30.5	10.9	2403	-	50	682	
	LT265/60R20	121/118S	E	BSW	355330	(8.0)-9.5	54	16.3	32.5	10.7	3195	2910	80	639	
	LT275/55R20	120/117T	E	BSW	356500	8.0-(8.5)-9.5	50	16.4	31.9	11.2	3085	2835	80	651	
	275/55R20	117T	XL	BSW	355850	7.5-(8.5)-9.5	42	13.5	31.9	11.2	2833	-	50	651	
	275/60R20	115T	SL	BSW	356340	7.5-(8.0)-9.5	43	13.5	33.0	11.0	2679	-	44	630	
	LT275/60R20	123/120T	E	BSW	356510	(8.0)-9.5	55	16.4	33.0	11.0	3415	3085	80	630	
	LT275/65R20	126/123S	E	BSW	355420	(8.0)-9.5	55	16.4	34.1	11.0	3750	3415	80	609	
	P285/55R20	114T	SL	BSW	356440	8.0-(9.0)-10.0	45	13.6	32.4	11.7	2601	-	44	642	
	LT285/55R20	122/119T	E	BSW	356350	8.5-(9.0)-10.0	54	16.5	32.4	11.7	3305	3000	80	642	
	LT285/60R20	125/122R	E	BSW	355340	(8.5)-10.0	56	16.5	33.5	11.5	3640	3305	80	621	
	LT295/55R20	123/120T	E	BSW	356360	8.5-(9.5)-10.5	58	16.6	32.8	12.2	3415	3085	80	634	
	LT295/60R20	126/123S	E	BSW	355350	(8.5)-10.5	60	16.6	33.9	11.8	3750	3415	80	612	
	LT295/65R20	129/126S	E	BSW	355440	(8.5)-10.5	63	16.6	35.1	11.8	4080	3750	80	592	
	305/50R20	120T	XL	BSW	355820	8.5-(9.5)-11.0	47	13.9	32.0	12.4	3086	-	50	648	
	LT305/55R20	125/122Q	F	BSW	355320	9.0-(9.5)-11.0	65	16.8	33.2	12.4	3640	3305	80	625	
	LT325/60R20	126/123R	E	BSW	355370	(9.5)-11.5	70	17.0	35.4	13.0	3750	3415	65	588	
	33X12.50R20LT	119Q	F	BSW	355940	8.5-(10.0)-11.0	63	16.9	32.5	12.5	3000	-	80	639	
	35X11.50R20LT	124R	E	BSW	356480	8.0-(9.0)-10.5	66	16.9	34.5	11.4	3525	-	80	602	
	35X12.50R20LT	121R	E	BSW	355980	8.5-(10.0)-11.0	68	16.9	34.5	12.5	3195	-	65	602	
	35X12.50R20LT	125Q	F	BSW	355990	8.5-(10.0)-11.0	67	16.9	34.5	12.5	3640	-	80	602	
	35X13.50R20LT	126Q	F	BSW	356040	9.5-(11.0)-12.0	71	16.9	34.5	13.6	3750	-	80	602	
	37X12.50R20LT	126Q	E	BSW	356020	8.5-(10.0)-11.0	73	16.9	36.5	12.5	3750	-	65	569	
	22	285/45R22	114H	XL	BSW	355780	9.0-(9.5)-10.5	44	13.6	32.1	11.2	2601	-	50	647
		LT285/50R22	121/118R	E	BSW	355290	8.5-(9.0)-10.0	56	16.5	33.3	11.7	3195	2910	80	624
LT285/55R22		124/121S	E	BSW	355310	8.5-(9.0)-10.0	63	16.5	34.4	11.7	3525	3195	80	604	
LT295/50R22		122/119T	E	BSW	356490	8.5-(9.5)-10.5	62	16.6	33.7	12.2	3305	3000	80	617	
LT295/55R22		125/122T	E	BSW	356460	8.0-(9.5)-10.5	63	16.6	34.8	12.2	3640	-	80	598	
305/45R22		118S	XL	BSW	356370	9.5-(10.0)-11.5	48	13.9	32.8	11.9	2910	-	50	633	
LT325/50R22		127Q	F	BSW	355300	9.5-(10.0)-11.5	72	17.0	34.8	13.2	3860	-	80	596	
33X12.50R22LT		109R	E	BSW	355950	8.5-(10.0)-11.0	59	16.9	32.5	12.5	2270	-	65	639	
35X12.50R22LT		121Q	F	BSW	356000	8.5-(10.0)-11.0	69	16.9	34.5	12.5	3195	-	80	602	
37X12.50R22LT		127Q	F	BSW	356030	8.5-(10.0)-11.0	75	16.9	36.5	12.5	3860	-	80	569	



OPEN COUNTRY A/T III
P/EURO-METRIC

OPEN COUNTRY A/T III
LT-METRIC

OPEN COUNTRY A/T III
FLotation

OPEN COUNTRY A/T III
OWL AVAILABLE



LT / SUV / CUV / COM VAN

LT

LT

LT / SUV / CUV / COM VAN



HIGHWAY ALL-SEASON TIRE

The Open Country H/T II builds on the quality and reputation of the Open Country H/T. Advanced technology and design provide improved wet braking performance and handling, longer tread life and more consistent traction performance throughout the life of the tire. Light truck and SUV owners will appreciate the dual sidewall design—sporty on one side, classic on the other—that lets them choose the look that complements their vehicles. This premium all-season tire comes with up to a 70,000-mile treadwear warranty and is backed by our 500-mile Trial Offer.



MILEAGE WARRANTY*

P-/Euro-Metric Sizes: 70,000-miles
 LT Sizes: 50,000-miles

POPULAR FITMENTS

Cadillac/Chevrolet/GMC Trucks & SUVs
 Dodge SUVs
 Ford Trucks & SUVs
 Nissan/Infiniti Trucks & SUVs
 Ram Trucks
 Toyota/Lexus Trucks & SUVs

UTQG

P-/Euro-Metric Sizes:
 • S-/T-Rated: 740 A B
 • H-/V-Rated: 740 A A

WEAR-RESISTANT TREAD COMPOUND

- Extends tread life and durability.

OPEN COUNTRY H/T II

LT / SUV / CUV / COM VAN

LT

ADAPTIVE CIRCUMFERENTIAL GROOVES

- Help maintain wet traction performance throughout the wear life of the tire.

EXPANDING SHOULDER GROOVES

- Help maintain wet traction performance throughout the wear life of the tire.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve braking on wet and dry roads.
- Improve light snow traction.

FOUR WIDE CIRCUMFERENTIAL GROOVES

- Evacuate water to improve wet traction.

DUAL SIDEWALL DESIGNS

- Offer two distinct looks for customizing—one sporty and one classic.



OPEN COUNTRY® H/T II

LT

LT / SUV / CUV / COM VAN

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	235/75R15	109T	XL	OWL	364720	6.0-(6.5)-8.0	33	11.8	28.9	9.3	2271	-	50	720
	215/70R16	100H	SL	BSW	364500	5.5-(6.5)-7.0	27	11.5	27.9	8.7	1764	-	51	745
	LT215/85R16	115/112S	E	BSW	364290	5.5-(6.0)-7.0	38	14.2	30.4	8.5	2680	2470	80	683
	LT225/75R16	115/112S	E	BSW	364250	(6.0) -7.0	38	14.1	29.3	8.8	2680	2470	80	709
	235/70R16	109T	XL	OWL	364530	6.0-(7.0)-8.0	31	11.7	29.0	9.4	2271	-	50	717
	LT235/85R16	120/116S	E	OWL	364280	6.0-(6.5)-7.5	44	14.5	31.7	9.3	3042	2780	80	655
	245/70R16	107T	SL	OWL	364690	6.5-(7.0)-8.0	33	11.8	29.5	9.8	2149	-	44	704
	LT245/75R16	120/116S	E	OWL	364240	6.5-(7.0)-8.0	42	14.4	30.5	9.8	3042	2778	80	682
	245/75R16	111T	SL	OWL	364700	6.5-(7.0)-8.0	33	12.0	30.5	9.8	2403	-	44	682
	255/70R16	111T	SL	OWL	364640	6.5-(7.5)-8.5	36	12.0	30.1	10.2	2403	-	44	691
	265/70R16	112T	SL	BSW	364520	7.0-(8.0)-9.0	38	12.1	30.6	10.7	2469	-	44	678
	265/70R16	112T	SL	OWL	364510	7.0-(8.0)-9.0	38	12.1	30.6	10.7	2469	-	44	678
	LT265/75R16	123/120S	E	OWL	364310	7.0-(7.5)-8.0	49	14.6	31.7	10.5	3415	3085	80	656
	265/75R16	116T	SL	OWL	364730	7.0-(7.5)-9.0	40	12.2	31.7	10.5	2756	-	44	656
LT285/75R16	126/123S	E	OWL	364410	7.5-(8.0)-9.0	56	15.7	32.8	11.3	3750	3415	80	633	
17	225/65R17	102H	SL	BSW	364450	6.0-(6.5)-8.0	31	11.5	28.5	9.0	1874	-	51	729
	235/65R17	104T	SL	BSW	364460	6.5-(7.0)-8.5	33	11.6	29.1	9.4	1984	-	44	715
	235/70R17	109T	XL	OWL	364710	6.0-(7.0)-8.0	34	11.7	30.0	9.4	2271	-	50	692
	235/75R17	109T	SL	OWL	364660	6.0-(6.5)-8.0	35	11.8	30.9	9.3	2271	-	44	673
	LT235/80R17	120/117S	E	BSW	364300	6.0-(6.5)-7.5	45	14.4	31.8	9.3	3085	2835	80	653
	245/65R17	107H	SL	BSW	364490	(7.0) -8.5	34	11.7	29.5	9.8	2149	-	51	704
	LT245/70R17	119/116S	E	OWL	364340	6.5-(7.0)-8.0	43	14.2	30.6	9.8	3000	2755	80	680
	245/70R17	110T	SL	OWL	364540	6.5-(7.0)-8.0	36	11.8	30.6	9.8	2337	-	44	680
	LT245/75R17	121/118S	E	BSW	364220	6.5-(7.0)-7.5	45	14.4	31.5	9.8	3195	2910	80	660
	LT245/75R17	121/118S	E	OWL	364230	6.5-(7.0)-7.5	45	14.4	31.5	9.8	3195	2910	80	660
	255/65R17	110T	SL	OWL	364630	7.0-(7.5)-9.0	36	11.8	30.1	10.2	2337	-	44	691
	255/70R17	112T	SL	OWL	364600	6.5-(7.5)-8.5	36	12.0	31.1	10.2	2469	-	44	668
	265/65R17	112T	SL	OWL	364550	7.5-(8.0)-9.5	38	12.0	30.6	10.7	2469	-	44	680
	LT265/70R17	121/118S	E	BSW	364270	7.0-(8.0)-8.5	49	14.5	31.7	10.7	3195	2910	80	656
	LT265/70R17	121/118S	E	OWL	364260	7.0-(8.0)-8.5	47	14.5	31.7	10.7	3195	2910	80	656
	265/70R17	115T	SL	BSW	364430	7.0-(8.0)-9.0	41	12.1	31.7	10.7	2679	-	44	656
	265/70R17	115T	SL	OWL	364440	7.0-(8.0)-9.0	40	12.1	31.7	10.7	2679	-	44	656
LT285/70R17	121/118S	E	OWL	364360	7.5-(8.5)-9.0	53	15.7	32.8	11.5	3195	2910	80	634	
18	235/60R18	107V	XL	BSW	369300	6.5-(7.0)-8.5	33	11.0	29.1	9.4	2149	-	50	714
	235/65R18	110V	XL	BSW	369320	6.5-(7.0)-8.5	34	11.0	30.0	9.4	2337	-	50	692
	245/60R18	109V	XL	BSW	369310	(7.0) -8.5	35	11.0	29.6	9.8	2271	-	50	703
	LT255/65R18	120/117R	E	BSW	364420	7.0-(7.5)-9.0	48	14.2	31.1	10.2	3085	2835	80	669
	255/65R18	111T	SL	BSW	364570	7.0-(7.5)-9.0	38	11.8	31.1	10.2	2403	-	44	669
	255/70R18	113S	SL	BSW	364740	6.5-(7.5)-8.5	41	12.0	32.1	10.2	2535	-	44	647
	265/60R18	110T	SL	BSW	364560	7.5-(8.0)-9.5	39	11.8	30.5	10.7	2337	-	44	681
	265/65R18	114T	SL	BSW	364610	7.5-(8.0)-9.5	39	12.0	31.5	10.7	2601	-	44	659
	265/70R18	116T	SL	BSW	364620	7.0-(8.0)-9.0	43	12.1	32.6	10.7	2756	-	44	636
	LT275/65R18	123/120S	E	BSW	364320	7.5-(8.0)-9.0	52	14.5	32.1	11.0	3415	3085	80	647
	275/65R18	116T	SL	BSW	364470	7.5-(8.0)-9.5	43	12.1	32.1	11.0	2756	-	44	647
	LT275/70R18	125/122S	E	BSW	364330	7.0-(8.0)-8.5	53	14.6	33.2	11.0	3640	3305	80	626
	285/60R18	120V	XL	BSW	364750	8.0-(8.5)-10.0	43	11.5	31.5	11.5	3086	-	50	660
20	255/50R20	109H	XL	BSW	364670	7.0-(8.0)-9.0	38	10.8	30.1	10.4	2271	-	50	691
	255/55R20	110H	XL	BSW	364650	7.0-(8.0)-9.0	42	11.0	31.0	10.4	2337	-	50	670
	265/50R20	107T	SL	BSW	364580	7.5-(8.5)-9.5	39	11.6	30.5	10.9	2149	-	44	682
	LT265/60R20	121/118S	E	BSW	364370	7.5-(8.0)-9.5	53	14.2	32.5	10.7	3195	2910	80	639
	275/55R20	117H	XL	BSW	364480	7.5-(8.5)-9.5	43	11.2	31.9	11.2	2833	-	50	651

Speed Rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "RD" = Reinforced, "C" = 6-ply rating, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall, "OWL" = Outline White Lettering. Bold designates measuring rim width. *Inflated dimensions.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
20	LT275/60R20	123/120R	E	BSW	364350	7.5-(8.0)-9.5	55	14.4	33.0	11.0	3415	3085	80	630
	275/60R20	115T	SL	BSW	364680	7.5-(8.0)-9.5	44	12.0	33.0	11.0	2679	-	44	630
	LT275/65R20	126/123S	E	BSW	364390	7.5-(8.0)-9.5	57	14.5	34.1	11.0	3750	3415	80	609
	285/50R20	112V	SL	BSW	364760	8.0-(9.0)-10.0	45	11.2	31.3	11.7	2469	-	51	665
	LT285/60R20	125/122R	E	BSW	364380	8.0-(8.5)-10.0	59	15.7	33.5	11.5	3640	3305	80	621
	LT285/65R20	127/124R	E	BSW	364400	8.0-(8.5)-10.0	60	15.7	34.6	11.5	3860	3525	80	601
21	275/50R21	113V	XL	BSW	364780	7.5-(8.5)-9.5	40	11.1	31.9	11.2	2535	-	50	652
22	275/50R22	111H	SL	BSW	364770	7.5-(8.5)-9.5	45	11.1	32.9	11.2	2403	-	51	632
	285/45R22	114H	XL	BSW	364590	9.0-(9.5)-10.5	42	11.1	32.1	11.2	2601	-	50	647



LT / SUV / CUV / COM VAN

LT

CUV/SUV TOURING ALL-SEASON TIRE

The Open Country Q/T offers a quiet, comfortable ride, impressive tread life and attractive design. Built for a wide range of vehicles, from CUVs to luxury SUVs, this premium all-season tire also provides confident handling and stability. It comes with a 65,000-mile treadwear warranty and is backed by our 500-mile Trial Offer.

LT

LT / SUV / CUV / COM VAN

MILEAGE WARRANTY*

65,000-miles

POPULAR FITMENTS

Acura MDX
BMW X-Series
Honda CR-V
Lexus NX/RX
Nissan Rogue
Toyota RAV4

UTQG

S-/T-rated: 680 A B
H-/V-rated: 680 A A



FOUR WIDE CIRCUMFERENTIAL GROOVES

- Evacuate water to improve wet traction.

OPEN LATERAL SLITS

- Improve water drainage for better wet performance.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve braking on wet and dry roads.
- Improve light snow traction.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE	
16	215/70R16	100H	SL	BSW	318050	5.5-(6.5)-7.0	29	12.2	27.9	8.7	1764	51	745	
	225/70R16	103H	SL	BSW	318060	6.0-(6.5)-7.5	31	12.3	28.4	9.0	1929	51	731	
	P235/70R16	104T	SL	BSW	318070	6.0-(7.0)-8.0	33	12.5	29.0	9.4	1984	44	717	
	255/65R16	109H	SL	BSW	318120	7.0-(7.5)-8.0	37	12.7	29.1	10.2	2271	51	715	
17	225/65R17	102H	SL	BSW	318010	6.0-(6.5)-8.0	31	12.3	28.5	9.0	1874	51	729	
	235/60R17	102T	SL	BSW	318160	6.5-(7.0)-8.5	33	12.5	28.1	9.4	1874	44	739	
	235/65R17	108V	XL	BSW	318090	6.5-(7.0)-8.5	33	12.0	29.1	9.4	2205	50	715	
	P245/65R17	105H	SL	BSW	318110	(7.0) -8.5	37	12.6	29.5	9.8	2039	51	704	
	255/60R17	106V	SL	BSW	318190	7.0-(7.5)-9.0	36	12.2	29.1	10.2	2094	51	715	
	P265/65R17	110S	SL	BSW	318140	7.5-(8.0)-9.5	42	12.9	30.6	10.7	2337	44	680	
	P265/70R17	113H	SL	BSW	318000	7.0-(8.0)-9.0	42	12.9	31.7	10.7	2535	51	656	
	18	235/55R18	100V	SL	BSW	318240	6.5-(7.5)-8.5	32	12.0	28.1	9.6	1764	51	738
235/60R18		107V	XL	BSW	318170	6.5-(7.0)-8.5	33	12.0	29.1	9.4	2149	50	714	
235/65R18		106V	SL	BSW	318390	6.5-(7.0)-8.5	35	11.7	30.0	9.4	2094	51	692	
245/60R18		105H	SL	BSW	318180	(7.0) -8.5	35	12.6	29.6	9.8	2039	51	703	
255/55R18		109V	XL	BSW	318020	7.0-(8.0)-9.0	36	12.2	29.0	10.4	2271	50	716	
255/60R18		112V	XL	BSW	318200	7.0-(7.5)-9.0	37	12.2	30.0	10.2	2469	50	692	
P255/65R18		109S	SL	BSW	318130	7.0-(7.5)-9.0	39	12.7	31.1	10.2	2271	44	669	
265/60R18		110V	SL	BSW	318220	7.5-(8.0)-9.5	40	12.2	30.5	10.7	2337	51	681	
P265/65R18		112H	SL	BSW	318150	7.5-(8.0)-9.5	43	12.9	31.5	10.7	2469	51	659	
P225/55R19		99V	SL	BSW	318230	6.0-(7.0)-8.0	33	11.8	28.8	9.2	1709	51	722	
19	235/50R19	99V	SL	BSW	318380	6.5-(7.5)-8.5	32	11.7	28.3	9.6	1709	51	734	
	235/55R19	105V	XL	BSW	318250	6.5-(7.5)-8.5	33	12.0	29.2	9.6	2039	50	712	
	P245/55R19	103H	SL	BSW	318270	7.0-(7.5)-8.5	36	12.6	29.6	10.0	1929	51	701	
	255/50R19	107V	XL	BSW	318330	7.0-(8.0)-9.0	36	12.2	29.1	10.4	2149	50	714	
	255/55R19	111V	XL	BSW	318280	7.0-(8.0)-9.0	38	12.2	30.0	10.4	2403	50	692	
	255/60R19	109H	SL	BSW	318210	7.0-(7.5)-9.0	40	12.7	31.1	10.2	2271	51	669	
	265/50R19	110V	XL	BSW	318350	7.5-(8.5)-9.5	38	12.2	29.5	10.9	2337	50	704	
	275/55R19	111V	SL	BSW	318300	7.5-(8.5)-9.5	42	12.3	30.9	11.2	2403	51	672	
	20	235/55R20	102V	SL	BSW	318370	6.5-(7.5)-8.5	35	12.5	30.2	9.6	1874	51	689
		P245/50R20	102V	SL	BSW	318320	7.0-(7.5)-8.5	37	12.1	29.7	10.0	1874	51	700
255/50R20		109V	XL	BSW	318340	7.0-(8.0)-9.0	36	12.2	30.1	10.4	2271	50	691	
255/55R20		110V	XL	BSW	318290	7.0-(8.0)-9.0	39	12.2	31.0	10.4	2337	50	670	
265/50R20		111V	XL	BSW	318360	7.5-(8.5)-9.5	39	12.2	30.5	10.9	2403	50	682	
275/55R20		117H	XL	BSW	318400	7.5-(8.5)-9.5	44	13.0	31.9	11.2	2833	50	651	
22	275/60R20	115T	SL	BSW	318460	7.5-(8.0)-9.5	43	13.0	33.0	11.0	2679	44	630	
	P285/45R22	110H	SL	BSW	318030	9.0-(9.5)-10.5	47	12.5	32.1	11.2	2337	51	647	

Speed Rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "C" = 6-ply rating, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall, "OWL" = Outline White Lettering. Bold designates measuring rim width. **Inflated dimensions.



LT / SUV / CUV / COM VAN

LT

STREET/SPORT TRUCK ALL-SEASON TIRE

The Proxes ST III is the perfect balance of dynamic looks and sport-oriented performance for trucks and SUVs. With a wider tread and a silica-based tread compound, the Proxes ST III stops up to 6 feet shorter in wet conditions* while delivering superb handling, excellent all-season performance, consistent wear and a smooth, quiet ride, now backed by a 40,000-mile warranty.

MILEAGE WARRANTY[^]

40,000-miles

POPULAR FITMENTS

BMW X3
 Cadillac Escalade
 Chevrolet Tahoe
 Infiniti QX60
 Lexus LX
 Range Rover Sport

UTQG

500 A A



DYNAMIC DIRECTIONAL, ALL-SEASON TREAD DESIGN

- Provides a good balance between wet traction, dry handling and performance-based looks.

LIGHTNING GROOVES

- Enable better water evacuation resulting in better wet performance.

ARROWHEAD TAPERS

- Deliver increased tread block stiffness resulting in better straight-line driving stability.

DIRECTIONAL SHOULDER BLOCKS

- Stabilize the tread blocks for better braking performance and a quieter ride.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve light snow traction.



*Performance claim based upon commissioned third-party test results. Wet braking based on tests of Toyo Proxes® ST III™ 275/55R20 and Toyo Proxes® ST III™ 275/55R20, from 60 to 0 mph.

[^]See toyotires.com for details.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	225/65R17	106V	XL	BSW	247080	6.0-(6.5)-8.0	30	10.1	28.5	9.0	2094	50	729
	235/65R17	108V	XL	BSW	247560	6.5-(7.0)-8.5	32	10.1	29.1	9.4	2205	50	715
	255/60R17	110V	XL	BSW	247090	7.0-(7.5)-9.0	35	10.1	29.1	10.2	2337	50	715
	275/55R17	109V	SL	BSW	247520	7.5-(8.5)-9.5	36	10.1	28.9	11.2	2271	51	719
	275/60R17	110V	SL	BSW	247060	7.5-(8.0)-9.5	37	10.1	30.0	11.0	2337	51	692
18	225/55R18	102V	XL	BSW	247580	6.0-(7.0)-8.0	29	10.1	27.8	9.2	1874	50	748
	235/60R18	107V	XL	BSW	247120	6.5-(7.0)-8.5	31	10.1	29.1	9.4	2149	50	714
	235/65R18	110V	XL	BSW	247510	6.5-(7.0)-8.5	35	10.1	30.0	9.4	2337	50	692
	245/60R18	105V	SL	BSW	247530	(7.0) -8.5	32	10.1	29.6	9.8	2039	51	703
	255/55R18	109V	XL	BSW	247570	7.0-(8.0)-9.0	33	10.1	29.0	10.4	2271	50	716
	255/60R18	112V	XL	BSW	247150	7.0(7.5)-9.0	36	10.1	30.0	10.2	2469	50	692
	265/60R18	114V	XL	BSW	247160	7.5-(8.0)-9.5	36	10.1	30.5	10.7	2601	50	681
	285/60R18	120V	XL	BSW	247590	8.0-(8.5)-10.0	41	10.2	31.5	11.5	3086	50	660
	295/45R18	112V	XL	BSW	247180	9.5-(10.0)-11.0	35	10.1	28.5	11.7	2469	50	730
19	235/55R19	105V	XL	BSW	247190	6.5-(7.5)-8.5	32	10.1	29.2	9.6	2039	50	712
	255/50R19	107V	XL	BSW	247200	7.0-(8.0)-9.0	34	10.1	29.1	10.4	2149	50	714
	255/55R19	111V	XL	BSW	247210	7.0-(8.0)-9.0	36	10.1	30.0	10.4	2403	50	692
20	235/55R20	105V	XL	BSW	247220	6.5-(7.5)-8.5	34	10.1	30.2	9.6	2039	50	689
	245/50R20	102V	SL	BSW	247010	7.0-(7.5)-8.5	32	10.1	29.7	10.0	1874	51	700
	255/45R20	105V	XL	BSW	247230	8.0-(8.5)-9.5	33	10.1	29.1	10.0	2039	50	715
	255/50R20	109V	XL	BSW	247240	7.0-(8.0)-9.0	34	10.1	30.1	10.4	2271	50	691
	265/45R20	108V	XL	BSW	247250	8.5-(9.0)-10.0	34	10.1	29.4	10.5	2205	50	707
	265/50R20	111V	XL	BSW	247260	7.5-(8.5)-9.5	37	10.1	30.5	10.9	2403	50	682
	275/40R20	106W	XL	BSW	247020	9.0-(9.5)-11.0	33	10.1	28.7	10.9	2094	50	725
	275/45R20	110V	XL	BSW	247600	8.5-(9.0)-10.5	35	10.1	29.8	10.7	2337	50	698
	275/50R20	113W	XL	BSW	247620	7.5-(8.5)-9.5	40	10.1	30.9	11.2	2535	50	673
	275/55R20	117V	XL	BSW	247500	7.5-(8.5)-9.5	41	10.1	31.9	11.2	2833	50	651
	285/50R20	116V	XL	BSW	247280	8.0-(9.0)-10.0	41	10.1	31.3	11.7	2756	50	665
	295/40R20	110V	XL	BSW	247290	10.0-(10.5)-11.5	37	10.1	29.3	11.9	2337	50	709
	295/45R20	114V	XL	BSW	247300	9.5-(10.0)-11.0	38	10.1	30.5	11.7	2601	50	682
	305/50R20	120V	XL	BSW	247310	8.5-(9.5)-11.0	44	10.3	32.0	12.4	3086	50	648
	315/35R20	110W	XL	BSW	247320	10.5-(11.0)-12.5	37	10.1	28.7	12.6	2337	50	725
21	275/50R21	113V	XL	BSW	247640	7.5-(8.5)-9.5	41	10.1	31.9	11.2	2535	50	652
	295/35R21	107W	XL	BSW	247650	10.0-(10.5)-11.5	36	10.1	29.1	11.9	2149	50	714
22	265/35R22	102W	XL	BSW	247550	9.0-(9.5)-10.5	34	10.1	29.3	10.7	1874	50	708
	265/40R22	106W	XL	BSW	247340	9.0-(9.5)-10.5	37	10.1	30.4	10.7	2094	50	684
	275/40R22	108W	XL	BSW	247660	9.0-(9.5)-11.0	37	10.1	30.7	10.9	2205	50	677
	285/35R22	106W	XL	BSW	247350	9.5-(10.0)-11.0	38	10.1	29.9	11.4	2094	50	695
	285/40R22	110V	XL	BSW	247360	9.5-(10.0)-11.0	42	10.1	31.0	11.4	2337	50	670
	285/45R22	114V	XL	BSW	247370	9.0-(9.5)-10.5	41	10.1	32.1	11.2	2601	50	647
	295/30R22	103W	XL	BSW	247380	10.0-(10.5)-11.0	35	10.1	29.0	11.9	1929	50	716
	295/35R22	108W	XL	BSW	247390	10.0-(10.5)-11.5	40	10.1	30.1	11.9	2205	50	690
	305/40R22	114V	XL	BSW	247400	10.0-(11.0)-12.0	44	10.1	31.6	12.3	2601	50	657
	305/45R22	118V	XL	BSW	247610	9.5-(10.0)-11.5	46	10.1	32.8	11.9	2910	50	633
24	335/25R22	105W	XL	BSW	247420	11.5-(12.0)-12.5	38	10.2	28.6	13.5	2039	50	726
	285/35R24	108W	XL	BSW	247460	9.5-(10.0)-11.0	41	10.1	31.9	11.4	2205	50	651
	285/40R24	112V	XL	BSW	247430	9.5-(10.0)-11.0	44	10.1	33.0	11.4	2469	50	630
	295/30R24	104W	XL	BSW	247440	10.0-(10.5)-11.0	38	10.1	31.0	11.9	1984	50	670
305/35R24	112W	XL	BSW	247450	10.0-(11.0)-12.0	45	10.1	32.4	12.3	2469	50	640	

LT / SUV / CUV / COM VAN

LT

Speed rated "V" = 149mph, "W" = 168mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

CUV/SUV TOURING ALL-WEATHER TIRE

The Celsius CUV offers year-round versatility plus winter-weather safety in one. This all-weather tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire. Celsius stops up to 31 feet shorter on snow than a typical all-season tire,* plus it's backed by a 60,000-mile warranty.

LT

LT / SUV / CUV / COM VAN

MILEAGE WARRANTY[^]

60,000-miles

POPULAR FITMENTS

Audi Q5
Chevrolet Equinox
Ford Edge
Honda CR-V
Subaru Outback
Toyota RAV4

UTQG

S-/T-rated: 520 A B
H-/V-rated: 500 A A
and 520 A A



Three-Peak Mountain Snowflake qualified for severe snow conditions.

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for stability and traction on wet and dry roads.

SNOW CLAWS

- Improve deep snow traction.
- Increase block rigidity for better ice and wet traction.

SLUSH GROOVES

- Increase traction by evacuating slush and snow.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve braking on icy, wet and dry roads.



*Performance claim based upon commissioned third-party test results. Snow braking test conducted on 255/55R18 tires from 30 to 0 mph. Individual results may vary. For a copy of the test report, write to Toyo Tire U.S.A. Corp., P.O. Box 6052, Cypress, CA 90630.

[^]See toyotires.com for details.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
16	215/70R16	100H	SL	BSW	125730	5.5-(6.5)-7.0	29	11.1	27.9	8.7	1764	51	745
	235/70R16	106H	SL	BSW	129920	6.0-(7.0)-8.0	30	11.3	29.0	9.4	2094	51	717
17	225/55R17	101V	XL	BSW	128000	6.0-(7.0)-8.0	28	11.0	26.8	9.2	1819	50	776
	225/60R17	99V	SL	BSW	128020	6.0-(6.5)-8.0	28	11.1	27.6	9.0	1709	51	752
	225/65R17	102H	SL	BSW	128040	6.0-(6.5)-8.0	31	11.2	28.5	9.0	1874	51	729
	235/55R17	103V	XL	BSW	128010	6.5-(7.5)-8.5	31	11.1	27.2	9.6	1929	50	765
	235/60R17	102H	SL	BSW	128030	6.5-(7.0)-8.5	31	11.2	28.1	9.4	1874	51	739
	235/65R17	108V	XL	BSW	128050	6.5-(7.0)-8.5	33	11.3	29.1	9.4	2205	50	715
	P245/65R17	105H	SL	BSW	128060	(7.0) -8.5	33	11.3	29.5	9.8	2039	51	704
	265/70R17	116S	SL	BSW	129910	7.0-(8.0)-9.0	40	11.3	31.7	10.7	2679	44	656
	225/55R18	98V	SL	BSW	129860	6.0-(7.0)-8.0	29	11.0	27.8	9.2	1653	51	748
18	235/55R18	100V	SL	BSW	128070	6.5-(7.5)-8.5	31	11.1	28.1	9.6	1764	51	738
	235/60R18	107V	XL	BSW	128090	6.5-(7.0)-8.5	33	11.2	29.1	9.4	2149	50	714
	P235/65R18	104H	SL	BSW	128120	6.5-(7.0)-8.5	32	11.3	30.0	9.4	1984	51	692
	245/60R18	105H	SL	BSW	128100	(7.0) -8.5	33	11.3	29.6	9.8	2039	51	703
	255/55R18	109V	XL	BSW	128080	7.0-(8.0)-9.0	36	11.3	29.0	10.4	2271	50	716
	P255/65R18	109H	SL	BSW	128130	7.0-(7.5)-9.0	38	11.3	31.1	10.2	2271	51	669
	265/60R18	110V	SL	BSW	128110	7.5-(8.0)-9.5	40	11.3	30.5	10.7	2337	51	681
	265/65R18	114T	SL	BSW	129890	7.5-(8.0)-9.5	39	11.3	31.5	10.7	2601	44	659
	275/65R18	116T	SL	BSW	129900	7.5-(8.0)-9.5	40	11.3	32.1	11.0	2756	44	647
19	225/55R19	99V	SL	BSW	129870	6.0-(7.0)-8.0	31	11.0	28.8	9.2	1709	51	722
	235/45R19	95H	SL	BSW	125700	7.5-(8.0)-9.0	28	11.1	27.4	9.3	1521	51	759
	235/50R19	99H	SL	BSW	128140	6.5-(7.5)-8.5	32	11.1	28.3	9.6	1709	51	734
	235/55R19	105V	XL	BSW	128170	6.5-(7.5)-8.5	33	11.1	29.2	9.6	2039	50	712
	P245/55R19	103H	SL	BSW	128180	7.0-(7.5)-8.5	34	11.2	29.6	10.0	1929	51	701
	255/50R19	107V	XL	BSW	128150	7.0-(8.0)-9.0	35	11.3	29.1	10.4	2149	50	714
	P255/60R19	108H	SL	BSW	128200	7.0-(7.5)-9.0	40	11.3	31.1	10.2	2205	51	669
	265/50R19	110H	XL	BSW	128160	7.5-(8.5)-9.5	37	11.3	29.5	10.9	2337	50	704
	275/55R19	111V	SL	BSW	128190	7.5-(8.5)-9.5	40	11.3	30.9	11.2	2403	51	672
20	P235/55R20	102H	SL	BSW	128230	6.5-(7.5)-8.5	32	11.1	30.2	9.6	1874	51	689
	P245/50R20	102V	SL	BSW	128210	7.0-(7.5)-8.5	34	11.2	29.7	10.0	1874	51	700
	255/50R20	109V	XL	BSW	129850	7.0-(8.0)-9.0	37	11.3	30.1	10.4	2271	50	691
	265/50R20	107V	SL	BSW	128220	7.5-(8.5)-9.5	38	11.3	30.5	10.9	2149	51	682
	275/40R20	106V	XL	BSW	125640	9.0-(9.5)-11.0	35	11.3	28.7	10.9	2094	50	725
	275/55R20	117V	XL	BSW	129880	7.5-(8.5)-9.5	42	11.3	31.9	11.2	2833	50	651
	275/60R20	115T	SL	BSW	125720	7.5-(8.0)-9.5	43	11.3	33.0	11.0	2679	44	630



Speed rated "H" = 130mph, "T" = 118mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

LT / SUV / CUV / COM VAN

LT

ON/OFF-ROAD COMMERCIAL GRADE TIRE

The Open Country C/T boasts all-terrain commercial-grade durability, plus a Three-Peak Mountain Snowflake qualifies it for severe snow conditions. Developed for balanced on- and off-road work year-round, its unique tread design and tough construction deliver long tread life and traction in gravel, mud and snow. Contrary to its aggressive appearance, the Open Country C/T also provides a quiet, comfortable highway ride.

LT

LT / SUV / CUV / COM VAN

POPULAR FITMENTS

Chevrolet Silverado
Ford F-Series
Nissan Titan
Ram Series
Toyota Tundra



Three-Peak Mountain Snowflake qualified for severe snow conditions.

HIGH TURN-UP, 3-PLY POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance and handling.

BALANCED TREAD COMPOUND

- Helps resist cutting, chipping and stone drilling while remaining flexible in lower temperatures.
- Extends tire life and provides dependable year-round service.

DUAL-ANGLE SHOULDER BLOCKS

- Enhance traction in snow, mud and rutted road conditions.

OPEN SHOULDER DESIGN

- Helps provide traction in mild mud, slush and snow.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in ice traction.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
16	LT215/85R16	115/112Q	E	BSW	345220	5.5-(6.0)-7.0	46	17.0	30.4	8.5	2680	2470	80	683
	LT225/75R16	115/112Q	E	BSW	345180	(6.0) -7.0	45	17.0	29.3	8.8	2680	2470	80	709
	LT235/85R16	120/116Q	E	BSW	345160	6.0-(6.5)-7.5	55	18.3	31.7	9.3	3042	2778	80	655
	LT245/75R16	120/116Q	E	BSW	345050	6.5-(7.0)-8.0	51	18.3	30.7	9.8	3042	2778	80	676
	LT265/75R16	123/120Q	E	BSW	345170	7.0-(7.5)-8.0	57	18.4	31.7	10.5	3415	3085	80	656
	LT285/75R16	116/113Q	C	BSW	345190	7.5-(8.0)-9.0	62	18.4	32.8	11.3	2755	2535	50	633
17	LT225/75R17	116/113Q	E	BSW	345210	(6.0) -7.5	49	17.0	30.3	8.8	2755	2535	80	685
	LT235/80R17	120/117Q	E	BSW	345090	6.0-(6.5)-7.5	53	18.3	32.0	9.3	3085	2835	80	648
	LT245/70R17	119/116Q	E	BSW	345070	6.5-(7.0)-8.0	51	18.3	30.8	9.8	3000	2755	80	675
	LT245/75R17	121/118Q	E	BSW	345030	6.5-(7.0)-7.5	54	18.3	31.7	9.8	3195	2910	80	655
	LT265/70R17	121/118Q	E	BSW	345010	7.0-(8.0)-8.5	58	18.4	31.9	10.7	3195	2910	80	651
	LT285/70R17	121/118Q	E	BSW	345000	7.5-(8.5)-9.0	61	18.4	33.0	11.5	3195	2910	80	630
	LT285/70R17	116/113Q	C	BSW	345250	7.5-(8.5)-9.5	63	18.4	33.0	11.5	2755	2535	50	630
	35X12.50R17LT	121Q	E	BSW	345120	8.5-(10.0)-11.0	77	19.3	34.8	12.5	3195	-	65	598
18	LT265/70R18	124/121Q	E	BSW	345060	7.0-(8.0)-9.0	57	18.4	32.9	10.7	3525	3195	80	632
	LT275/65R18	123/120Q	E	BSW	345040	7.5-(8.0)-9.0	59	18.4	32.3	11.0	3415	3085	80	643
	LT275/70R18	125/122Q	E	BSW	345020	7.0-(8.0)-8.5	62	18.4	33.4	11.0	3640	3305	80	621
	LT295/70R18	129/126Q	E	BSW	345240	7.5-(8.5)-10.0	71	18.4	34.5	11.8	4080	3750	80	602
	35X12.50R18LT	123Q	E	BSW	345130	8.5-(10.0)-11.0	79	19.3	34.8	12.5	3415	-	65	598
	LT265/60R20	121/118Q	E	BSW	345110	7.5-(8.0)-9.5	61	18.4	32.8	10.7	3195	2910	80	634
20	LT275/55R20	115/112Q	D	BSW	345100	7.5-(8.5)-9.5	62	18.4	32.1	11.2	2680	2470	65	647
	LT275/65R20	126/123Q	E	BSW	345080	7.5-(8.0)-9.5	65	18.4	34.3	11.0	3750	3415	80	605
	LT285/55R20	122/119Q	E	BSW	345150	8.0-(9.0)-10.0	65	18.4	32.6	11.7	3305	3000	80	637
	LT285/60R20	125/122Q	E	BSW	345200	8.0-(8.5)-10.0	64	18.4	33.5	11.5	3640	3305	80	621
	LT295/65R20	129/126Q	E	BSW	345230	8.0-(8.5)-10.0	78	18.4	35.4	11.8	4080	3750	80	588
	35X12.50R20LT	121Q	E	BSW	345140	8.5-(10.0)-11.0	73	19.3	34.8	12.5	3195	-	65	598



LT / SUV / CUV / COM VAN

LT

Speed rated "Q" = 99 mph, "C" = 6-ply rating, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

OFF-ROAD COMMERCIAL GRADE TIRE

The iconic M-55 might be the hardest-working member of your crew. This commercial-grade tire was built to handle the toughest off-road jobs in snow, mud and rough terrain. Its extreme durability and long tread life provide heavy-duty truck owners with dependable year-round service.

LT

LT / SUV / CUV / COM VAN

POPULAR FITMENTS

Chevrolet Silverado 2500
Ford E-Series
Ford F-250/F-350
Ram Series



Three-Peak Mountain Snowflake qualified for severe snow conditions.*

AGGRESSIVE LUG AND BLOCK TREAD DESIGN

- Provides solid handling and traction.

OPEN SHOULDER DESIGN

- Maximizes water evacuation for excellent all-terrain traction and stability.

AGGRESSIVE SIPING

- Improves wet and snow traction.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in ice traction.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	LT215/75R15	100/97Q	C	BSW	309290	5.5- (6.0) -7.0	30	17.0	27.7	8.5	1765	1610	50	751
	LT235/75R15	104/101Q	C	BSW	309270	6.0- (6.5) -7.0	37	17.6	28.9	9.3	1985	1820	50	720
16	LT215/85R16	115/112Q	E	BSW	312270	5.5- (6.0) -7.0	43	17.0	30.7	8.7	2680	2470	80	676
	LT225/75R16	115/112Q	E	BSW	312350	(6.0) -7.0	40	17.0	29.4	8.7	2680	2470	80	705
	LT235/85R16	120/116Q	E	BSW	312290	6.0- (6.5) -7.5	49	17.5	32.0	9.3	3042	2770	80	650
	LT245/75R16	120/116Q	E	BSW	312330	6.5- (7.0) -8.0	46	17.5	30.8	9.8	3042	2778	80	675
	LT255/85R16	123/120Q	E	BSW	312230	6.5- (7.0) -8.0	59	18.1	33.4	10.4	3415	3085	80	622
	LT265/75R16	123/120Q	E	BSW	312250	7.0- (7.5) -8.0	58	18.3	32.0	10.8	3415	3085	80	649
	LT285/75R16	126/123Q	E	BSW	312240	7.5- (8.0) -9.0	60	18.9	33.2	11.2	3740	3415	80	626
17	LT235/80R17	120/117Q	E	BSW	312210	6.0- (6.5) -7.5	49	17.6	32.0	9.3	3085	2835	80	649
	LT245/75R17	121/118Q	E	BSW	312190	6.5- (7.0) -7.5	49	17.6	31.9	9.7	3195	2910	80	651
	LT265/70R17	121/118Q	E	BSW	312220	7.0- (8.0) -8.5	53	18.3	32.0	10.6	3195	2910	80	648
	LT285/70R17	121/118Q	E	BSW	301750	7.5- (8.5) -9.0	53	18.9	33.1	11.4	3195	2910	80	627
18	LT265/70R18	124/121Q	E	BSW	312200	7.0- (8.0) -9.0	57	18.3	33.0	10.6	3525	3195	80	629
	LT275/65R18	123/120Q	E	BSW	312300	7.5- (8.0) -9.0	57	18.9	32.4	11.0	3415	3085	80	640
	LT275/70R18	125/122Q	E	BSW	312310	7.0- (8.0) -8.5	60	18.8	33.6	11.0	3640	3305	80	619



LT / SUV / CUV / COM VAN

LT

Speed rated "Q" = 99mph, "C" = 6-ply rating, "E" = 10-ply rating.
 "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

COMMERCIAL VAN ALL-SEASON TIRE

The Toyo H08+ is built for the rigorous demands placed on modern commercial vans. Its commercial grade construction and unique tread design provide durability and long tread life for passenger transportation, delivery hauling and commercial applications. The H08+ also delivers confident handling in both dry and wet conditions.

LT

LT / SUV / CUV / COM VAN

POPULAR FITMENTS

Modern commercial vans, such as the Ford Transit.

COMMERCIAL-GRADE CONSTRUCTION

- Stands up to the rigorous demands placed on modern commercial vans.

DEEP TREAD DEPTH

- Delivers long tread life and enhanced water evacuation.

CONTINUOUS TREAD BLOCK DESIGN

- Increases straight-line stability and resists irregular wear.

WIDE TREAD BLOCKS AND CLOSED SHOULDERS

- Provide increased stability under load.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	185/60R15C	94/92T	C	BSW	369720	(5.5) -6.0	22	12.0	23.7	7.4	1475	1390	54	875
	195/75R16C	107/105R	D	BSW	369010	5.0- (5.5) -6.0	29	12.6	27.5	7.7	2150	2040	69	756
	LT225/75R16	115/112R	E	BSW	369700	(6.0) -7.5	39	14.1	29.3	8.8	2680	2470	80	709
16	225/75R16C	121/120R	E	BSW	369750	(6.0) -7.0	36	13.0	29.3	8.8	3197	3086	83	709
	235/65R16C	121/119R	E	BSW	360960	6.5- (7.0) -7.5	38	13.0	28.0	9.4	3195	3000	83	741
	LT245/75R16	120/116S	E	BSW	369710	6.5- (7.0) -8.0	38	14.4	30.5	9.8	3042	2778	80	682

Speed rated "R" = 106mph, "S" = 112 mph, "T" = 118 mph., "D" = 8-ply rating, "E" = 10-ply rating. "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.



LT

LT / SUV / CUV / COM VAN

For the latest tire information,
please visit toyotires.com.

TOYO TIRES[®]

COMMERCIAL GRADE ALL-WEATHER TIRE

The Celsius Cargo is designed for commercial van and light truck owners who need year-round, all-weather reliability. It delivers top-tier performance and even wear at a great value with improved snow and ice performance over a typical all-season tire and longer tread life than a winter tire. With an outside tread designed for all-season performance, and an inside tread for winter traction, independent owners and small fleets enjoy more time on the job and less downtime switching tires. A durable sidewall provides extra protection against curb damage, and its sturdy casing provides exceptional handling and stability during frequent stops and starts.

LT

LT / SUV / CUV / COM VAN

POPULAR FITMENTS

Ford Transit, Trucks and Vans
Chevrolet Express
Ram Trucks and Vans
Mercedes-Benz Sprinter
Nissan NV



Three-Peak Mountain Snowflake qualified for severe snow conditions.

ALL-WEATHER TREAD DESIGN

- Maximizes wet and dry traction with a circumferential rib and low void ratio on the outside tread.
- Optimizes snow, slush and ice traction with zigzag shaped tread blocks containing a high sipe density on the inside tread.

SNOW CLAWS

- Grip the snow and ice to improve traction.

SLUSH GROOVES

- Evacuate snow and ice to maximize traction.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth ride and long tread life.
- Improve braking on icy, wet and dry roads.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	185/60R15C	94/92T	C	BSW	238390	(5.5) -6.0	23	12.1	23.7	7.4	1475	1390	54	875
	195/75R16C	107/105R	D	BSW	238440	5.0- (5.5) -6.0	30	12.7	27.5	7.7	2150	2040	69	756
	205/75R16C	113/111R	E	BSW	238570	(5.5) -6.5	31	12.9	28.1	8.0	2535	2405	76	739
16	LT215/85R16	115/112Q	E	BSW	238460	5.5- (6.0) -7.0	42	14.2	30.4	8.5	2680	2470	80	683
	LT225/75R16	115/112R	E	BSW	238490	(6.0) -7.5	38	14.1	29.3	8.8	2680	2470	80	709
	225/75R16C	121/120R	E	BSW	238470	(6.0) -7.0	36	13.1	29.3	8.8	3195	3085	83	709
	235/65R16C	121/119R	E	BSW	238410	6.5- (7.0) -7.5	35	13.0	28.0	9.4	3195	3000	83	741
	LT245/75R16	120/116S	E	BSW	238500	6.5- (7.0) -8.0	40	14.4	30.5	9.8	3042	2778	80	682
	LT245/70R17	119/116S	E	BSW	238510	6.5- (7.0) -8.0	43	14.2	30.6	9.8	3000	2755	80	680
17	LT245/75R17	121/118S	E	BSW	238530	6.5- (7.0) -8.0	41	14.4	31.5	9.8	3195	2910	80	660
	LT265/70R18	124/121S	E	BSW	238540	7.0- (8.0) -9.0	43	14.5	32.6	10.7	3525	3195	80	636
18	LT275/65R18	123/120S	E	BSW	238550	(8.0) -9.5	52	14.5	32.1	11.0	3415	3085	80	647
	LT275/65R20	126/123S	E	BSW	238430	(8.0) -9.5	50	14.5	34.1	11.0	3750	3415	80	609

LT / SUV / CUV / COM VAN

LT



Speed rated "Q" = 99mph, R = 106 mph, S = 112 mph, T = 118 mph. "C" = 6-ply rating, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

SPORTS CAR

PRO

V E N

**TOYO
TIRES**

SPORTS CAR



CELSIUS SPORT



ULTRA-HIGH PERFORMANCE ALL-WEATHER

DRY HANDLING	4.0
WET HANDLING	5.0
RIDE COMFORT	4.0
QUIET RIDE	4.0
TREAD LIFE	4.0
WINTER HANDLING	4.5
FUEL EFFICIENCY	3.0
SNOW TRACTION	4.5
ICE TRACTION	4.5

UTQG

V-rated: 420 A A
W-rated: 400 A A
Y-rated: 380 A A

MILEAGE WARRANTY

Up to 60,000 miles*

VEHICLE & APPLICATION SEGMENT

Luxury Cars
Passenger Cars
Direct OE Replacement

SPEED RATING

V-W-Y

WHEEL DIAMETER

17"-18"-19"-20"-21"-22"



PROXES SPORT



MAX PERFORMANCE SUMMER

DRY HANDLING	5.0
WET HANDLING	5.0
RIDE COMFORT	3.5
QUIET RIDE	4.5
TREAD LIFE	3.0
WINTER HANDLING	N/A
FUEL EFFICIENCY	3.0

UTQG

240 AA A

MILEAGE WARRANTY

Up to 25,000 miles*

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
Direct OE Replacement
Plus Sizing

SPEED RATING

W-Y-[Y]

WHEEL DIAMETER

17"-18"-19"-20"-21"-22"

PROXES SPORT A/S



ULTRA-HIGH PERFORMANCE ALL-SEASON

DRY HANDLING	4.5
WET HANDLING	4.5
RIDE COMFORT	4.0
QUIET RIDE	4.5
TREAD LIFE	3.5
WINTER HANDLING	3.0
FUEL EFFICIENCY	3.0

UTQG

V/W = 460 AA A, Y/[Y] = 440 AA A

MILEAGE WARRANTY

Up to 50,000 miles*

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
Direct OE Replacement

SPEED RATING

V-W-Y-[Y]

WHEEL DIAMETER

16"-17"-18"-19"-20"-21"-22"

PROXES R1R



EXTREME PERFORMANCE SUMMER

DRY HANDLING	5.0
WET HANDLING	5.0
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	2.0
WINTER HANDLING	N/A
FUEL EFFICIENCY	2.0

UTQG

200 AA A

MILEAGE WARRANTY

N/A

VEHICLE & APPLICATION SEGMENT

Sports Cars
Autocross
Direct OE Replacement
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

15"-16"-17"-18"



SPORTS CAR

S

SPORTS CAR:

Whether you're driving on the highway or competing on the track, our high-performance tires are engineered to meet the highest expectations of quality and performance. Our advanced technologies in tire compounds and tread design deliver exceptional wet and dry handling, high-speed stability, longer tread life and improved fuel economy.

ULTRA-HIGH PERFORMANCE ALL-WEATHER TIRE

The Celsius Sport is designed to deliver superb traction in changing weather conditions for high performance luxury cars, SUVs and CUVs. It carries the Three-Peak Mountain Snowflake symbol designating its capability in snow, slush and ice for true all-weather performance. Spirited drivers seeking an all-season performance upgrade will appreciate the refined looks, precise handling and driving comfort of the Celsius Sport.

MILEAGE WARRANTY*

V/W-rated: 60,000-miles
Y-rated: 40,000-miles

POPULAR FITMENTS

Audi Q7
BMW X6
Jaguar F-Pace
Mercedes S-Class
Porsche Panamera
Lexus ES

UTQG

V-rated: 420 A A
W-rated: 400 A A
Y-rated: 380 A A

ALL-WEATHER TREAD DESIGN

- Optimizes all-weather winter traction with high sipe density and zigzag-shaped tread blocks on the inside tread.
- Maintains wet and dry all-season traction through the balance of sipe density and interlocking multi-wave sipes on the outside tread.



Three-Peak Mountain Snowflake qualified for severe snow conditions.

SPECIALIZED SILICA COMPOUND

- Provides high grip in wet and dry conditions.
- Maintains flexibility in cold climates to enhance winter performance.

ULTRA-HIGH PERFORMANCE CASING CONSTRUCTION

- Improves responsiveness and handling with a stiff sidewall, high tensile steel belts and high hardness bead filler.
- Delivers more even contact pressure during acceleration, braking and cornering.

WIDE GROOVES WITH TRACTION BARS

- Evacuate water to improve wet traction.
- Bite into snow and slush to improve snow traction.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve snow traction and braking on wet roads.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	205/50R17	93V	XL	BSW	127540	5.5-(6.5)-7.5	21	10.0	25.1	8.4	1433	50	827
	215/45R17	91W	XL	BSW	127610	(7.0) -8.0	20	9.6	24.6	8.4	1356	50	843
	215/50R17	95V	XL	BSW	127710	6.0-(7.0)-7.5	22	10.1	25.5	8.9	1521	50	814
	215/55R17	98V	XL	BSW	127550	6.0-(7.0)-7.5	25	10.2	26.3	8.9	1653	50	790
	225/45R17	94W	XL	BSW	127700	7.0-(7.5)-8.5	22	9.7	25.0	8.9	1477	50	832
	225/50R17	98V	XL	BSW	127580	6.0-(7.0)-8.0	23	10.2	25.9	9.2	1653	50	802
	225/55R17	101V	XL	BSW	127730	6.0-(7.0)-8.0	27	10.3	26.8	9.2	1819	50	776
	235/45R17	97W	XL	BSW	127630	7.5-(8.0)-9.0	22	9.8	25.4	9.3	1609	50	819
	265/60R17	108V	SL	BSW	127860	7.5-(8.0)-9.5	34	10.7	29.5	10.7	2205	51	704
18	225/40R18	92Y	XL	BSW	127740	7.5-(8.0)-9.0	23	9.3	25.1	9.1	1389	50	828
	225/50R18	95V	SL	BSW	127690	6.0-(7.0)-8.0	28	10.2	26.9	9.2	1521	51	773
	225/60R18	104W	XL	BSW	127770	6.0-(6.5)-8.0	29	10.1	28.6	9.0	1984	50	726
	235/45R18	98W	XL	BSW	127670	7.5-(8.0)-9.0	26	9.8	26.3	9.3	1653	50	789
	235/50R18	101W	XL	BSW	127590	6.5-(7.5)-8.5	28	10.0	27.3	9.6	1819	50	761
	235/55R18	104V	XL	BSW	127600	6.5-(7.5)-8.5	30	10.5	28.1	9.6	1984	50	738
	235/60R18	107V	XL	BSW	127750	6.5-(7.0)-8.5	32	10.6	29.1	9.4	2149	50	714
	245/55R18	103W	SL	BSW	127790	7.0-(7.5)-8.5	31	10.2	28.6	10.0	1929	51	726
	255/60R18	112W	XL	BSW	127880	7.0-(7.5)-9.0	34	10.7	30.0	10.2	2469	50	692
19	225/45R19	96W	XL	BSW	127660	7.0-(7.5)-8.5	25	9.7	27.0	8.9	1565	50	770
	235/40R19	96W	XL	BSW	127760	8.0-(8.5)-9.5	26	9.7	26.4	9.5	1565	50	786
	235/50R19	103V	XL	BSW	127680	6.5-(7.5)-8.5	30	10.3	28.3	9.6	1929	50	734
	235/55R19	105V	XL	BSW	127560	6.5-(7.5)-8.5	31	10.5	29.2	9.6	2039	50	712
	245/45R19	102Y	XL	BSW	127810	7.5-(8.0)-9.0	29	9.6	27.7	9.6	1874	50	751
	255/55R19	111W	XL	BSW	127870	7.5-(8.0)-9.0	35	10.1	30.0	10.4	2403	50	692
	265/50R19	110V	XL	BSW	127830	7.5-(8.5)-9.5	34	10.7	29.5	10.9	2337	50	704
	275/40R19	105Y	XL	BSW	127820	9.0-(9.5)-11.0	32	9.7	27.7	10.9	2039	50	751
20	235/55R20	102V	SL	BSW	127780	6.5-(7.5)-8.5	32	10.5	30.2	9.6	1874	51	689
	245/40R20	99Y	XL	BSW	127840	8.0-(8.5)-9.5	29	9.4	27.7	9.8	1709	50	750
	245/45R20	103W	XL	BSW	127640	7.5-(8.0)-9.0	30	10.0	28.7	9.6	1929	50	725
	255/50R20	109V	XL	BSW	127720	7.0-(8.0)-9.0	35	10.6	30.1	10.4	2271	50	691
	265/45R20	108Y	XL	BSW	127850	8.5-(9.0)-10.0	33	9.7	29.4	10.5	2205	50	707
	275/35R20	102W	XL	BSW	127570	9.0-(9.5)-11.0	31	10.1	27.6	10.9	1874	50	754
	275/40R20	106Y	XL	BSW	127800	9.0-(9.5)-11.0	33	9.7	28.7	10.9	2094	50	725
	275/45R20	110Y	XL	BSW	127650	8.5-(9.0)-10.5	34	9.7	29.8	10.7	2337	50	698
	315/35R20	110Y	XL	BSW	127620	10.5-(11.0)-12.5	37	9.7	28.7	12.6	2337	50	725
21	255/40R21	102Y	XL	BSW	127910	8.5-(9.0)-10.0	32	9.6	29.0	10.2	1874	50	716
	265/40R21	105Y	XL	BSW	127920	9.0-(9.5)-10.5	32	9.7	29.3	10.7	2039	50	708
	275/45R21	110Y	XL	BSW	127950	8.5-(9.0)-10.5	36	9.7	30.7	10.7	2337	50	676
	285/40R21	109Y	XL	BSW	127960	9.5-(10.0)-11.0	36	9.7	30.0	11.4	2271	50	693
	295/35R21	107Y	XL	BSW	127890	10.0-(10.5)-11.5	36	9.7	29.1	11.9	2149	50	714
	295/40R21	111Y	XL	BSW	127900	10.0-(10.5)-11.5	37	9.7	30.3	11.9	2403	50	686
22	265/40R22	106Y	XL	BSW	127930	9.0-(9.5)-10.5	34	9.7	30.4	10.7	2094	50	684
	275/40R22	108Y	XL	BSW	127940	9.0-(9.5)-11.0	36	9.7	30.7	10.9	2205	50	677

SPORTS CAR

S

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

MAX PERFORMANCE SUMMER TIRE

The Proxes Sport creates a greater connection to the road with improved contact, improved grip and improved handling. This max performance summer tire combines proprietary NanoBalance™ technology with a unique tread design to deliver these enhancements in wet and dry conditions. Serving as the flagship for the company's legendary Proxes line of high performance tires, Proxes Sport is available in over 80 sizes covering a broad range of modern sports cars and luxury sedans. It also comes with a 25,000-mile warranty and is backed by our 500 mile Trial Offer.

MILEAGE WARRANTY*

25,000-miles

UTQG

240 AA A



POPULAR FITMENTS

- Audi R8
- BMW M5
- Ford Mustang GT
- Lexus LC 500h
- Porsche 911

NEW HIGH-GRIP SILICA TREAD COMPOUND

- Delivers excellent handling and improved grip in wet and dry conditions.
- Improves flexibility for greater adhesion to the road surface.

DYNAMIC TAPER DESIGN

- Grips the road for improved contact and handling.
- Enhances wet and dry braking.

IMPROVED RIB DESIGN

- Creates more even contact pressure for improved braking and handling.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	205/45ZR17	88Y	XL	BSW	136110	6.5-(7.0)-7.5	18	9.2	24.3	8.1	1235	50	857
	215/45ZR17	91W	XL	BSW	136120	(7.0)-8.0	19	9.7	24.6	8.4	1356	50	843
	225/45ZR17	94Y	XL	BSW	136130	7.0-(7.5)-8.5	22	9.3	25	8.9	1477	50	832
	225/50ZR17	98Y	XL	BSW	136140	6.0-(7.0)-8.0	23	9.4	25.9	9.2	1653	50	802
	235/40ZR17	94Y	XL	BSW	132720	8.0-(8.5)-9.5	21	9.4	24.4	9.5	1477	50	851
	235/45ZR17	97Y	XL	BSW	136060	7.5-(8.0)-9.0	21	9.6	25.4	9.3	1609	50	819
	245/40ZR17	95Y	XL	BSW	136090	8.0-(8.5)-9.5	22	9.6	24.7	9.8	1521	50	840
	245/45ZR17	99Y	XL	BSW	136180	7.5-(8.0)-9.0	21	9.7	25.7	9.6	1709	50	809
18	205/35ZR18	81Y	XL	BSW	133310	7.5	17	8.9	23.7	8.3	1019	50	878
	215/40ZR18	89Y	XL	BSW	136860	7.0-(7.5)-8.5	21	9.2	24.8	8.6	1279	50	839
	225/40ZR18	92Y	XL	BSW	136730	7.5-(8.0)-9.0	23	9.3	25.1	9.1	1389	50	828
	225/45ZR18	(95Y)	XL	BSW	136820	7.0-(7.5)-8.5	24	9.2	25.9	8.9	1521	50	801

*See toyotires.com for details.

S

SPORTS CAR

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE	
18	235/30ZR18	85Y	XL	BSW	133320	8.5	20	9.2	23.6	9.4	1135	50	881	
	235/40ZR18	(95Y)	XL	BSW	136040	8.0-(8.5)-9.5	24	9.2	25.4	9.5	1521	50	818	
	235/45ZR18	(98Y)	XL	BSW	136780	7.5-(8.0)-9.0	25	9.3	26.3	9.3	1653	50	789	
	235/50ZR18	101Y	XL	BSW	136680	6.5-(7.5)-8.5	27	9.2	27.3	9.6	1819	50	761	
	245/35ZR18	92Y	XL	BSW	136920	8.0-(8.5)-9.5	23	9.4	24.8	9.8	1389	50	839	
	245/40ZR18	(97Y)	XL	BSW	136710	8.0-(8.5)-9.5	25	9.3	25.7	9.8	1609	50	808	
	245/45ZR18	(100Y)	XL	BSW	136190	7.5-(8.0)-9.0	23	9.4	26.7	9.6	1764	50	779	
	255/35ZR18	94Y	XL	BSW	136170	8.5-(9.0)-10.0	24	9.6	25.0	10.2	1477	50	831	
	255/40ZR18	(99Y)	XL	BSW	132860	8.5-(9.0)-10	25	9.4	26.0	10.2	1709	50	798	
	255/45ZR18	(103Y)	XL	BSW	133100	8.0-(8.5)-9.5	29	9.1	27.0	10.0	1929	50	768	
	265/35ZR18	(97Y)	XL	BSW	136910	9.0-(9.5)-10.5	24	9.4	25.3	10.7	1609	50	821	
	265/40ZR18	(101Y)	XL	BSW	132870	9.0-(9.5)-10.5	27	9.6	26.3	10.7	1819	50	789	
	275/35ZR18	(99Y)	XL	BSW	133140	9.0-(9.5)-11.0	26	9.6	25.6	10.9	1709	50	813	
	275/40ZR18	(99Y)	SL	BSW	133180	9.0-(9.5)-11.0	29	9.7	26.7	10.9	1709	51	779	
	285/35ZR18	(101Y)	XL	BSW	133130	9.5-(10.0)-11.0	30	9.6	25.9	11.4	1819	50	803	
	295/35ZR18	(103Y)	XL	BSW	134820	10.0-(10.5)-11.5	30	9.6	26.1	11.9	1929	50	796	
	19	225/35ZR19	(88Y)	XL	BSW	136840	7.5-(8.0)-9.0	22	8.9	25.2	9.1	1235	50	823
		225/40ZR19	93Y	XL	BSW	136890	7.5-(8.0)-9.0	23	9.3	26.1	9.1	1433	50	796
225/45ZR19		(96Y)	XL	BSW	136930	7.0-(7.5)-8.5	24	9.2	27.0	8.9	1565	50	770	
235/35ZR19		(91Y)	XL	BSW	136750	8.0-(8.5)-9.5	23	9.1	25.5	9.5	1356	50	816	
235/40ZR19		96Y	XL	BSW	136880	8.0-(8.5)-9.5	24	9.4	25.4	9.5	1565	50	818	
245/35ZR19		(93Y)	XL	BSW	136740	8.0-(8.5)-9.5	24	9.2	25.8	9.8	1433	50	806	
245/40ZR19		(98Y)	XL	BSW	136830	8.0-(8.5)-9.5	26	9.3	26.7	9.8	1653	50	777	
245/45ZR19		102Y	XL	BSW	136950	7.5-(8.0)-9.0	27	9.7	27.7	9.6	1874	50	751	
255/30ZR19		(91Y)	XL	BSW	136790	8.5-(9.0)-9.5	23	9.2	25.1	10.2	1356	50	828	
255/35ZR19		(96Y)	XL	BSW	136760	8.5-(9.0)-10.0	25	9.3	26.0	10.2	1565	50	798	
255/40ZR19		100Y	XL	BSW	136770	8.5-(9.0)-10.0	27	9.7	27.0	10.2	1764	50	768	
265/30ZR19		(93Y)	XL	BSW	132730	9.0-(9.5)-10.0	25	9.3	25.3	10.7	1433	50	821	
265/35ZR19		(98Y)	XL	BSW	136800	9.0-(9.5)-10.5	26	9.4	26.3	10.7	1653	50	789	
265/40ZR19		(102Y)	XL	BSW	132880	9.0-(9.5)-10.5	27	9.6	27.4	10.7	1874	50	759	
275/30ZR19		(96Y)	XL	BSW	133240	9.0-(9.5)-10.0	27	9.4	25.6	10.9	1565	50	813	
275/35ZR19		(100Y)	XL	BSW	136940	9.0-(9.5)-11.0	28	9.6	26.6	10.9	1764	50	782	
275/40ZR19		(105Y)	XL	BSW	133110	9.0-(9.5)-11.0	31	9.7	27.7	10.9	2039	50	751	
20		285/30ZR19	(98Y)	XL	BSW	132960	9.5-(10.0)-10.5	28	9.4	25.8	11.4	1653	50	806
	285/35ZR19	(99Y)	SL	BSW	133160	9.5-(10.0)-11.0	30	9.6	26.9	11.4	1709	51	773	
	295/30ZR19	(100Y)	XL	BSW	132970	10.0-(10.5)-11.0	30	9.4	26.0	11.9	1764	50	798	
	295/35ZR19	(104Y)	XL	BSW	133080	10.0-(10.5)-11.5	33	9.6	27.1	11.9	1984	50	766	
	325/30ZR19	(105Y)	XL	BSW	132890	11.0-(11.5)-12.0	32	8.9	26.7	13.0	2039	50	777	
	225/35ZR20	90Y	XL	BSW	133150	7.5-(8.0)-9.0	22	9.2	26.2	9.1	1323	50	792	
	235/30ZR20	(88Y)	XL	BSW	132930	(8.5)-10	23	8.9	25.6	9.5	1235	50	812	
	245/30ZR20	(90Y)	XL	BSW	132940	8.0-(8.5)-9.0	25	9.1	25.8	9.8	1323	50	804	
	245/35ZR20	(95Y)	XL	BSW	136160	8.0-(8.5)-9.5	25	9.2	26.8	9.8	1521	50	776	
	245/40ZR20	99Y	XL	BSW	133120	8.0-(8.5)-9.5	27	9.6	27.7	9.8	1709	50	750	
	245/45ZR20	103Y	XL	BSW	136900	7.5-(8.0)-9.0	27	9.7	28.7	9.6	1929	50	725	
	255/30ZR20	(92Y)	XL	BSW	132950	8.5-(9.0)-9.5	25	9.2	26.1	10.2	1389	50	797	
	255/35ZR20	(97Y)	XL	BSW	136810	8.5-(9.0)-10.0	26	9.3	27.0	10.2	1609	50	769	
	255/40ZR20	(101Y)	XL	BSW	132740	8.5-(9.0)-10.0	28	9.4	28.0	10.2	1819	50	741	
	265/30ZR20	(94Y)	XL	BSW	136850	9.0-(9.5)-10.0	25	9.3	26.3	10.7	1477	50	790	
	265/35ZR20	(99Y)	XL	BSW	132980	9.0-(9.5)-10.5	28	9.4	27.3	10.7	1709	50	760	
	275/30ZR20	(97Y)	XL	BSW	132990	9.0-(9.5)-10.0	27	9.4	26.5	10.9	1609	50	783	
	275/35ZR20	(102Y)	XL	BSW	136070	9.0-(9.5)-11.0	29	9.6	27.6	10.9	1874	50	754	
275/40ZR20	(106Y)	XL	BSW	132900	9.0-(9.5)-11.0	31	9.7	28.7	10.9	2094	50	725		
21	285/25ZR20	93Y	XL	BSW	133250	10.5	29	9.6	25.6	11.6	1433	50	812	
	285/30ZR20	(99Y)	XL	BSW	131270	9.5-(10.0)-10.5	29	9.8	26.8	11.4	1709	50	776	
	285/35ZR20	(100Y)	SL	BSW	133170	9.5-(10.0)-11.0	31	9.6	27.9	11.4	1764	51	745	
	295/25ZR20	95Y	XL	BSW	133260	10.0-(10.5)-11.0	30	9.6	25.8	11.9	1521	50	804	
	295/30ZR20	(101Y)	XL	BSW	133070	10.0-(10.5)-11.0	32	9.4	27.0	11.9	1819	50	769	
	295/35ZR20	(105Y)	XL	BSW	133060	10.0-(10.5)-11.5	34	9.6	28.1	11.9	2039	50	739	
	305/25ZR20	97Y	XL	BSW	133270	10.5-(11.0)	31	9.3	26.0	12.3	1609	50	799	
	305/30ZR20	(103Y)	XL	BSW	134720	10.5-(11.0)-11.5	32	9.4	27.2	12.3	1929	50	763	
	265/40R21	102Y	XL	BSW	133340	8.5-(9.0)-10.0	30	9.7	29.0	10.2	1874	50	716	
	265/45R21	104Y	SL	BSW	133840	8.5-(9.0)-10.0	34	9.4	30.4	10.5	1984	51	684	
	275/40R21	107Y	XL	BSW	133360	9.0-(9.5)-11.0	31	10.0	29.6	10.9	2149	50	701	
	275/45R21	110Y	XL	BSW	134520	8.5-(9.0)-10.5	35	9.6	30.7	10.7	2337	50	676	
	285/35R21	105Y	XL	BSW	133370	9.5-(10.0)-11.0	37	9.8	28.9	11.4	2039	50	720	
	295/35R21	107Y	XL	BSW	133230	10.0-(10.5)-11.5	37	9.8	29.1	11.9	2149	50	714	
	295/40R21	111Y	XL	BSW	133220	10.0-(10.5)-11.5	36	9.4	30.3	11.9	2403	50	686	
	315/35R21	111Y	XL	BSW	134470	10.5-(11.0)-12.5	39	9.8	29.6	12.6	2403	50	701	
	315/40R21	111Y	SL	BSW	134500	10.5-(11.0)-12.5	40	9.4	30.9	12.6	2403	51	672	
	325/30R21	108Y	XL	BSW	133890	11.0-(11.5)-12.0	38	9.7	28.7	13.0	2205	50	724	
22	265/35R22	102Y	XL	BSW	133850	9.0-(9.5)-10.5	32	9.7	29.3	10.7	1874	50	708	
	275/35R22	104Y	XL	BSW	132310	9.0-(9.5)-11.0	32	9.8	29.6	10.9	1984	50	703	
	285/35R22	106Y	XL	BSW	132770	9.5-(10.0)-11.0	37	9.8	29.9	11.4	2094	50	695	
	295/30R22	103Y	XL	BSW	133880	10.0-(10.5)-11.0	36	9.7	29.0	11.9	1929	50	716	
	295/40R22	112Y	XL	BSW	133860	10.0-(10.5)-11.5	39	9.4	31.3	11.8	2469	50	664	

Speed rated "W" = 168mph, "Y" = 186mph, "Y" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

SPORTS CAR

S

ULTRA-HIGH PERFORMANCE ALL-SEASON TIRE

The Proxes Sport A/S is our ultra-high performance all-season tire. It delivers excellent wet and dry braking with a newly developed specialized silica compound. A dynamic taper and improved rib design create more even contact pressure while braking and added stability while cornering. Spirited drivers will enjoy an exhilarating sports experience at a great value with Proxes Sport A/S.

MILEAGE WARRANTY*

V/W-rated: 50,000-miles
Y/(Y)-rated: 40,000-miles

POPULAR FITMENTS

Audi A5
BMW 3-Series, 4-Series and 5-Series
Dodge Challenger
Ford Mustang GT
Lexus RC350
Tesla Model 3

UTQG

V/W = 460 AA A
Y/(Y) = 440 AA A



SPECIALIZED SILICA COMPOUND DEVELOPED WITH NANO BALANCE TECHNOLOGY

- Provides enhanced traction in wet conditions.

DYNAMIC TAPER DESIGN

- Grips the road surface for superb traction and handling.

IMPROVED RIB DESIGN

- Creates more even contact pressure for improved braking and handling.
- Provides firm grip and stability during cornering.

MULTI-WAVE SIPES

- Minimize irregular wear for a quiet ride throughout the life of the tire.
- Improve wet and dry performance.

ALIGNMENT WEAR INDICATORS

- Promote even wear.

RIM PROTECTOR

- Helps protect those valuable wheels.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX. LOAD (LBS)	MAX. PRESSURE (PSI)	REVS PER MILE
16	205/50R16	91V	XL	BSW	214630	5.5-(6.5)-7.5	22	10.0	24.1	8.4	1356	50	862
	205/55R16	94V	XL	BSW	214580	5.5-(6.5)-7.5	21	10.1	24.9	8.4	1477	50	835
17	205/40R17	84W	XL	BSW	214690	7.0-(7.5)-8.0	19	9.3	23.5	8.3	1102	50	885
	205/45R17	88W	XL	BSW	214680	6.5-(7.0)-7.5	21	9.4	24.3	8.1	1235	50	857
	205/50R17	93V	XL	BSW	214210	5.5-(6.5)-7.5	21	10.0	25.1	8.4	1433	50	827
	215/45R17	91W	XL	BSW	214110	(7.0) -8.0	30	9.6	24.6	8.4	1356	50	843
	215/50R17	95W	XL	BSW	214370	6.0-(7.0)-7.5	24	9.7	25.5	8.9	1521	50	814
	225/45R17	94W	XL	BSW	214030	7.0-(7.5)-8.5	25	9.7	25.0	8.9	1477	50	832
	225/50R17	98V	XL	BSW	214240	6.0-(7.0)-8.0	26	10.2	25.9	9.2	1653	50	802
	235/40R17	94Y	XL	BSW	214890	8.0-(8.5)-9.5	23	9.3	24.4	9.5	1477	50	851
	235/45R17	97W	XL	BSW	214120	7.5-(8.0)-9.0	31	9.8	25.4	9.3	1609	50	819
	235/50R17	100V	XL	BSW	214320	6.5-(7.5)-8.5	28	10.3	26.3	9.6	1764	50	790
	245/40R17	95W	XL	BSW	214250	8.0-(8.5)-9.5	30	9.8	24.7	9.8	1521	50	840
	245/45R17	99V	XL	BSW	214220	7.5-(8.0)-9.0	30	10.3	25.7	9.6	1709	50	809
	245/50R17	99V	SL	BSW	214380	7.0-(7.5)-8.5	29	10.5	26.7	10.0	1709	51	778
	255/40R17	98W	XL	BSW	214350	8.5-(9.0)-10.0	26	10.0	25.0	10.2	1653	50	830
275/40R17	98W	SL	BSW	214470	9.0-(9.5)-11.0	29	10.1	25.7	10.9	1653	51	809	
18	215/40R18	89Y	XL	BSW	214900	7.0-(7.5)-8.5	22	9.3	24.8	8.6	1279	50	839
	215/45R18	93W	XL	BSW	214330	(7.0) -8.0	23	9.6	25.6	8.4	1433	50	811
	225/40R18	92Y	XL	BSW	214570	7.5-(8.0)-9.0	24	9.3	25.1	9.1	1389	50	828
	225/45R18	95Y	XL	BSW	214140	7.0-(7.5)-8.5	25	9.3	25.9	8.9	1521	50	801
	225/50R18	95W	SL	BSW	214400	6.0-(7.0)-8.0	25	9.8	26.9	9.2	1521	51	773
	235/40R18	95Y	XL	BSW	214590	8.0-(8.5)-9.5	23	9.3	25.4	9.5	1521	50	818
	235/45R18	98W	XL	BSW	214160	7.5-(8.0)-9.0	30	9.8	26.3	9.3	1653	50	789
	235/50R18	101W	XL	BSW	214180	6.5-(7.5)-8.5	29	10.0	27.3	9.6	1819	50	761
	235/55R18	100V	SL	BSW	214270	6.5-(7.5)-8.5	25	10.5	28.1	9.6	1764	51	738
	245/35R18	92Y	XL	BSW	214870	8.0-(8.5)-9.5	24	9.3	24.8	9.8	1389	50	839
	245/40R18	97Y	XL	BSW	214150	8.0-(8.5)-9.5	26	9.4	25.7	9.8	1609	50	808
	245/45R18	100Y	XL	BSW	214170	7.5-(8.0)-9.0	27	9.6	26.7	9.6	1764	50	779
	245/50R18	100Y	SL	BSW	214360	7.0-(7.5)-8.5	30	9.7	27.7	10.0	1764	51	751
	255/35R18	94Y	XL	BSW	214660	8.5-(9.0)-10.0	25	9.4	25.0	10.2	1477	50	831
	255/40R18	99Y	XL	BSW	214290	8.5-(9.0)-10.0	27	9.6	26.0	10.2	1709	50	798
	255/45R18	103Y	XL	BSW	214390	8.0-(8.5)-9.5	31	9.7	27.0	10.0	1929	50	768
	265/35R18	97Y	XL	BSW	214770	9.0-(9.5)-10.5	26	9.6	25.3	10.7	1609	50	821
	265/40R18	101Y	XL	BSW	214490	9.0-(9.5)-10.5	30	9.7	26.3	10.7	1819	50	789
	265/45R18	101Y	SL	BSW	214500	8.5-(9.0)-10.0	30	9.7	27.4	10.5	1819	51	759
	275/35R18	99Y	XL	BSW	214760	9.0-(9.5)-11.0	27	9.7	25.6	10.9	1709	50	813
275/40R18	99Y	SL	BSW	214430	9.0-(9.5)-11.0	31	9.7	26.7	10.9	1709	51	779	
285/35R18	101Y	XL	BSW	214460	9.5-(10.0)-11.0	29	9.7	25.9	11.4	1819	50	803	
295/35R18	103Y	XL	BSW	214530	10.0-(10.5)-11.5	31	9.7	26.1	11.9	1929	50	796	
19	225/35R19	88Y	XL	BSW	214840	7.5-(8.0)-9.0	23	9.3	25.2	9.1	1235	50	823
	225/40R19	93Y	XL	BSW	214650	7.5-(8.0)-9.0	26	9.3	26.1	9.1	1433	50	796
	225/45R19	96W	XL	BSW	214260	7.0-(7.5)-8.5	27	9.7	27.0	8.9	1565	50	770
	235/35R19	91Y	XL	BSW	214620	8.0-(8.5)-9.5	23	9.3	25.5	9.5	1356	50	816
	235/40R19	96Y	XL	BSW	214850	8.0-(8.5)-9.5	26	9.3	26.4	9.5	1565	50	786
	245/35R19	93Y	XL	BSW	214720	8.0-(8.5)-9.5	25	9.3	25.8	9.8	1433	50	806
	245/40R19	98Y	XL	BSW	214190	8.0-(8.5)-9.5	27	9.4	26.7	9.8	1653	50	777
	245/45R19	102Y	XL	BSW	214300	7.5-(8.0)-9.0	28	9.6	27.7	9.6	1874	50	751
	245/50R19	105W	XL	BSW	214480	7.0-(7.5)-8.5	32	10.1	28.7	10.0	2039	50	724
	255/30R19	91Y	XL	BSW	214860	8.5-(9.0)-9.5	24	9.3	25.1	10.2	1356	50	828
	255/35R19	96Y	XL	BSW	214640	8.5-(9.0)-10.0	26	9.4	26.0	10.2	1565	50	798
	255/40R19	100Y	XL	BSW	214340	8.5-(9.0)-10.0	28	9.6	27.0	10.2	1764	50	768
	255/45R19	104Y	XL	BSW	214230	8.0-(8.5)-9.5	30	9.7	28.1	10.0	1984	50	740
	265/30R19	93Y	XL	BSW	214790	9.0-(10.0)-10.5	28	9.6	25.8	11.4	1653	50	806
	265/35R19	98Y	XL	BSW	214780	9.0-(9.5)-10.5	27	9.6	26.3	10.7	1653	50	789

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "[Y]" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

SPORTS CAR

S

PROXES® SPORT A/S



SPORTS CAR

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
19	275/30R19	96Y	XL	BSW	214880	9.0-(9.5)-10.0	27	9.6	25.6	10.9	1565	50	734
	275/35R19	100Y	XL	BSW	214730	9.0-(9.5)-11.0	30	9.7	26.6	10.9	1764	50	782
	275/40R19	105Y	XL	BSW	214410	9.0-(9.5)-11.0	32	9.7	27.7	10.9	2039	50	751
	285/30R19	98Y	XL	BSW	214800	(9.5)-10.5	25	9.4	25.3	10.7	1653	50	821
	285/35R19	103Y	XL	BSW	214450	9.5-(10.0)-11.0	33	9.7	26.9	11.4	1929	50	773
	285/40R19	103Y	SL	BSW	214550	9.5-(10.0)-11.0	34	9.7	28.0	11.4	1929	51	742
	295/30R19	100Y	XL	BSW	214750	10.0-(10.5)-11.0	32	9.6	26.0	11.9	1764	50	798
	325/30R19	105Y	XL	BSW	214420	11.0-(11.5)-12.0	36	9.6	26.7	13.0	2039	50	777
20	225/30R20	85W	XL	BSW	214940	8.0	22	9.3	25.4	9.1	1135	50	819
	225/35R20	90W	XL	BSW	214710	7.5-(8.0)-9.0	24	9.4	26.2	9.1	1323	50	792
	235/35R20	92Y	XL	BSW	214950	8.0-(8.5)-9.5	24	9.3	26.5	9.5	1389	50	785
	245/35R20	95Y	XL	BSW	214600	8.0-(8.5)-9.5	26	9.3	26.8	9.8	1521	50	776
	245/40R20	99Y	XL	BSW	214310	8.0-(8.5)-9.5	31	9.4	27.7	9.8	1709	50	750
	245/45R20	103Y	XL	BSW	214130	7.5-(8.0)-9.0	32	9.6	28.7	9.6	1929	50	725
	255/35R20	97Y	XL	BSW	214610	8.5-(9.0)-10.0	28	9.4	27.0	10.2	1609	50	769
	255/40R20	101Y	XL	BSW	214510	8.5-(9.0)-10.0	30	9.6	28.0	10.2	1819	50	741
	255/45R20	105Y	XL	BSW	214280	8.0-(8.5)-9.5	33	9.7	29.1	10.0	2039	50	715
	265/35R20	99Y	XL	BSW	214910	9.0-(9.5)-10.5	29	9.6	27.3	10.7	1709	50	760
	275/30R20	97Y	XL	BSW	214810	9.0-(9.5)-10.0	28	9.6	26.5	10.9	1609	50	783
	275/35R20	102Y	XL	BSW	214700	9.0-(9.5)-11.0	31	9.7	27.6	10.9	1874	50	754
	275/40R20	106Y	XL	BSW	214200	9.0-(9.5)-11.0	32	9.7	28.7	10.9	2094	50	725
	285/30R20	99Y	XL	BSW	214740	9.5-(10.0)-10.5	30	9.6	26.8	11.4	1709	50	776
	285/35R20	100Y	SL	BSW	214540	9.5-(10.0)-11.0	35	9.7	27.9	11.4	1764	51	745
	295/25R20	95Y	XL	BSW	214920	10.0-(10.5)-11.0	28	9.4	25.8	11.9	1521	50	804
	295/30R20	101Y	XL	BSW	214670	10.0-(10.5)-11.0	31	9.6	27.0	11.9	1819	50	769
	295/35R20	105Y	XL	BSW	214520	10.0-(10.5)-11.5	33	9.7	28.1	11.9	2039	50	739
	315/35R20	110Y	XL	BSW	214440	10.5-(11.0)-12.5	38	9.7	28.7	12.6	2337	50	725
	21	245/35R21	(96Y)	XL	BSW	214820	8.0-(8.5)-9.5	27	9.3	27.8	9.8	1565	50
265/35R21		(101Y)	XL	BSW	214830	9.0-(9.5)-10.5	31	9.6	28.3	10.7	1819	50	734
22	255/30R22	95Y	XL	BSW	214960	8.5-(9.0)-9.5	28	9.3	28.1	10.2	1521	50	740
	265/30R22	97Y	XL	BSW	214970	9.0-(9.5)-10.0	29	9.4	28.3	10.7	1609	50	734
	265/35R22	102W	XL	BSW	214930	9.0-(9.5)-10.5	31	10	29.3	10.7	1874	50	708
	295/25R22	97Y	XL	BSW	214980	10.0-(10.5)-11.0	32	9.4	27.8	11.9	1609	50	746
	315/25R22	101Y	XL	BSW	214990	11.0-(11.5)-12.0	34	9.4	28.2	12.8	1819	50	736



PROXES SPORT A/S
275 AND NARROWER

PROXES SPORT A/S
285 AND WIDER



SPORTS CAR

S

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "[Y]" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

EXTREME PERFORMANCE SUMMER TIRE

Years of grueling on-track experience and advanced engineering shine through in this extreme-performance summer tire. The Proxes R1R helps you drive hard through the corners and quickly accelerate in the straightaways. Features include an aggressive arrowhead tread design, an extra-wide footprint, a high-grip compound and an autocross-inspired casing design.

S

SPORTS CAR

POPULAR FITMENTS

BMW 3-Series
Honda S2000
Mitsubishi Lancer Evolution
Porsche Boxster
Subaru WRX STI

UTQG

200 AA A

SILICA-REINFORCED, HIGH-GRIP TREAD COMPOUND

- Improves grip for better handling performance during high-spirited driving.

TAPERED CENTER BLOCK EDGE

- Stabilizes center block movement to decrease irregular wear.
- Helps to increase hydroplaning resistance.

ADVANCED AUTOCROSS- INSPIRED CASING WITH MODIFIED RADIAL CONSTRUCTION

- Improves steering response and handling.

STABILITY CONTROL SLITS

- Provide resistance to irregular wear.
- Improve dry performance by maintaining block stiffness during aggressive braking.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/50R15	82V	SL	BSW	173370	5.5- (6.0) -7.0	20	8.2	22.8	7.8	1047	51	910
	195/55R15	85V	SL	BSW	173260	5.5- (6.0) -7.0	20	8.4	23.5	8.1	1135	51	883
	205/50R15	86V	SL	BSW	173330	5.5- (6.5) -7.5	20	8.2	23.0	8.5	1168	51	903
	225/45ZR15	87W	SL	BSW	173280	7.0- (7.5) -8.5	22	8.1	23.0	8.9	1201	51	905
16	205/45R16	83W	SL	BSW	173360	6.5- (7.0) -7.5	19	8.2	23.2	8.1	1074	51	894
	205/50R16	87V	SL	BSW	173350	5.5- (6.5) -7.5	22	8.6	24.3	8.4	1201	51	856
	205/55R16	91V	SL	BSW	145020	5.5- (6.5) -7.5	22	8.6	24.8	8.1	1356	51	838
	225/45ZR16	89W	SL	BSW	145040	7.0- (7.5) -8.5	23	8.1	23.9	9.0	1279	51	871
	225/50R16	92V	SL	BSW	145010	6.0- (7.0) -8.0	23	8.8	24.8	9.0	1389	51	838
17	215/45ZR17	87W	SL	BSW	173340	(7.0) -8.0	22	7.9	24.5	8.3	1201	51	847
	225/45ZR17	91W	SL	BSW	145070	7.0- (7.5) -8.5	24	8.1	25.0	8.9	1356	51	832
	235/40ZR17	90W	SL	BSW	173210	8.0- (8.5) -9.5	24	8.2	24.4	9.4	1323	51	850
	235/45ZR17	94W	SL	BSW	145050	7.5- (8.0) -9.0	24	8.2	25.3	9.4	1477	51	820
	245/35ZR17	91W	XL	BSW	173220	8.0- (8.5) -9.5	24	8.2	23.8	9.7	1356	50	872
	245/40ZR17	91W	SL	BSW	173240	8.0- (8.5) -9.5	24	8.2	24.7	9.8	1356	51	840
	245/45ZR17	95W	SL	BSW	145080	7.5- (8.0) -9.0	28	8.2	26.0	9.7	1521	51	799
	255/40ZR17	94W	SL	BSW	145060	8.5- (9.0) -10.0	26	8.2	25.2	10.3	1477	51	825
275/40ZR17	98W	SL	BSW	145110	9.0- (9.5) -11.0	27	8.2	25.6	10.8	1653	51	811	
18	245/40ZR18	93W	SL	BSW	173250	8.0- (8.5) -9.5	25	8.2	26.0	9.6	1433	51	800
	255/35ZR18	90W	SL	BSW	145090	8.5- (9.0) -10.0	24	8.2	25.1	10.1	1323	51	828
	265/35ZR18	93W	SL	BSW	173230	9.0- (9.5) -10.5	26	8.2	25.4	10.6	1433	51	817

SPORTS CAR

S




Speed rated "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

COMPETITION

WINNING

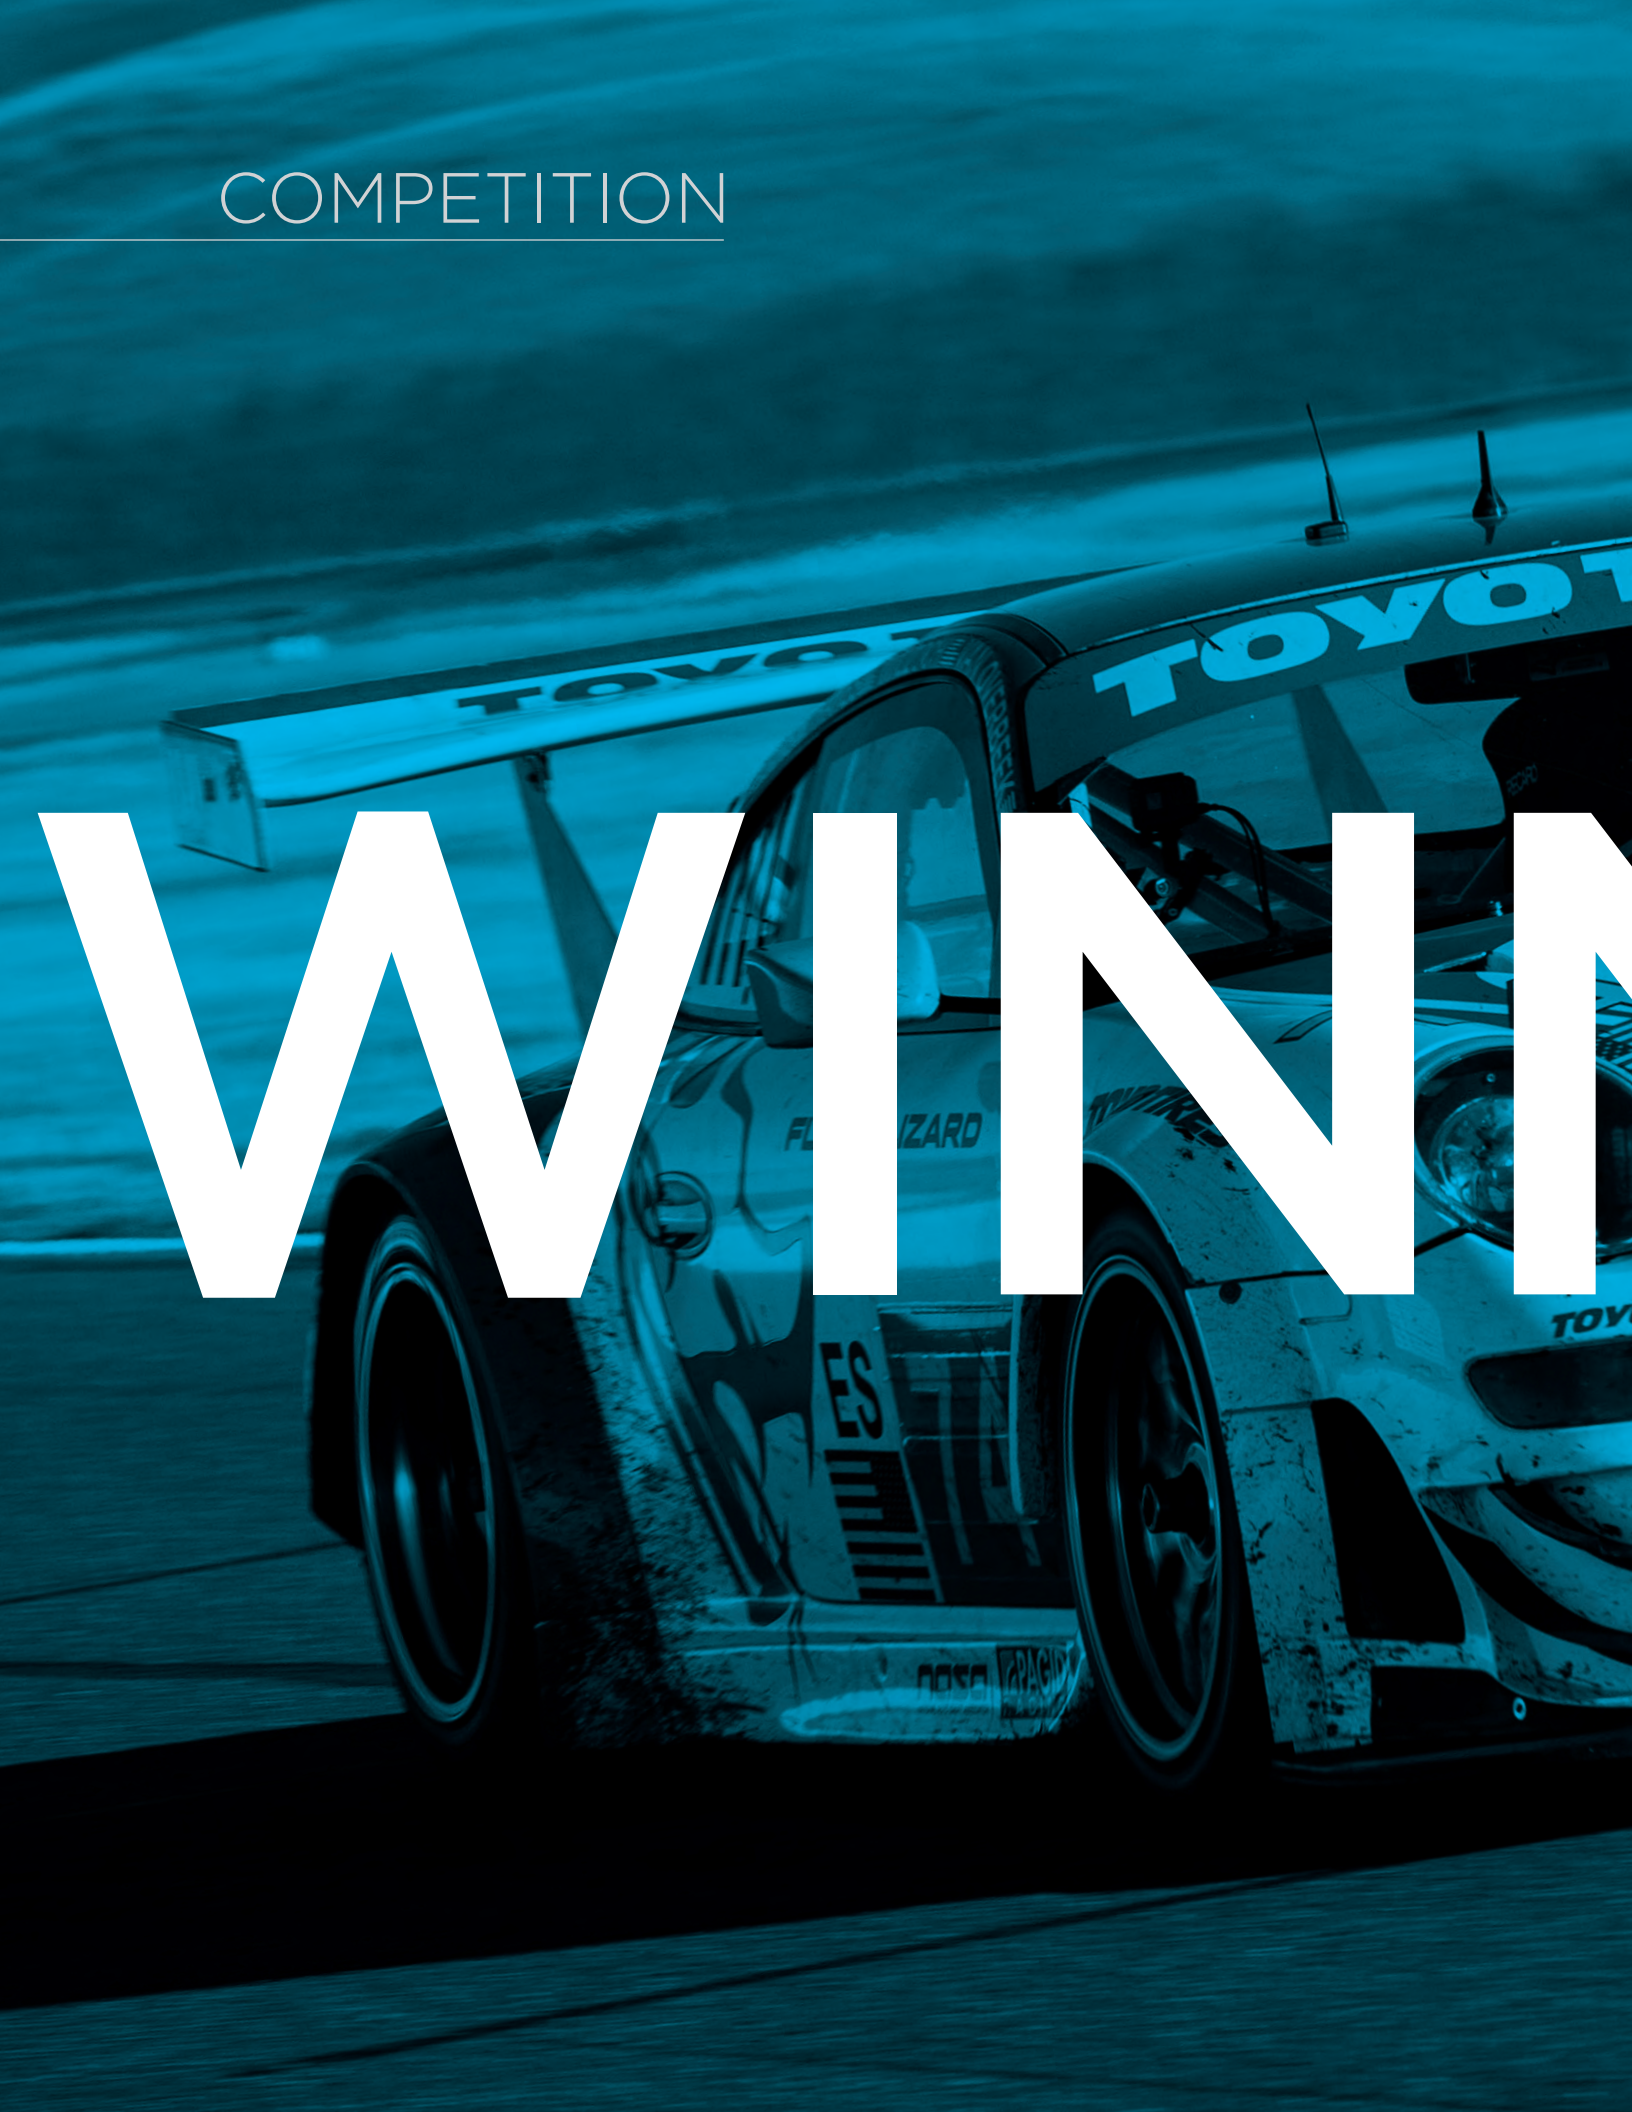

A blue-tinted photograph of a classic Ford Mustang driving on a road. The car is in motion, with a blurred background. The word "WINNING" is overlaid in large, bold, white capital letters across the center of the image. The car's front end, including the headlights and grille, is visible. There are "DYO TIRES" logos on the car's body.

WINNING

COMPETITION



PROXES R888R



DOT COMPETITION

DRY PERFORMANCE	4.5
WET PERFORMANCE	4.0
BRAKING	4.5
TREAD LIFE	4.5

UTQG

100 AA A

VEHICLE & APPLICATION SEGMENT

Road Racing
Race-Prepared Vehicles
High Performance Street

SPEED RATING

V, W, Y, (Y)

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"

PROXES RR



DOT COMPETITION

DRY PERFORMANCE	4.5
WET PERFORMANCE	N/A
BRAKING	4.5
TREAD LIFE	4.0

UTQG

40 C A

VEHICLE & APPLICATION SEGMENT

Road Racing
Endurance Racing
Race-Prepared Vehicles

SPEED RATING

V, (Y)

WHEEL DIAMETER

13"-15"-16"-17"-18"-19"-20"

PROXES RA1



DOT COMPETITION

DRY PERFORMANCE	3.5
WET PERFORMANCE	5.0
BRAKING	4.5
TREAD LIFE	5.0

UTQG

100 AA A

VEHICLE & APPLICATION SEGMENT

Road Racing
Race-Prepared Vehicles
High Performance Street

SPEED RATING

V

WHEEL DIAMETER

15"-16"-17"-18"

COMPETITION:

From the street to the track, Toyo Tires have been a staple in U.S. racing for over 25 years. You'll find them as spec tires for several classes in NASA and PCA Club racing. From DOT competition tires like the Proxes R888R to the race-ready Proxes RR to the full-slick Proxes RS1, our line of competition tires is race-proven and designed to get to the winner's circle faster.

PROXES RS1



FULL-SLICK COMPETITION

DRY PERFORMANCE **5.0**

WET PERFORMANCE N/A

BRAKING **5.0**

TREAD LIFE **4.0**

UTQG

N/A

VEHICLE & APPLICATION SEGMENT

Road Racing
Endurance Racing
Race-Prepared Vehicles

SPEED RATING

--

WHEEL DIAMETER

18"

PROXES TQ



DOT DRAG RADIAL

DRY PERFORMANCE **4.5**

WET PERFORMANCE N/A

BRAKING **4.5**

TREAD LIFE **4.5**

UTQG

00 B B

VEHICLE & APPLICATION SEGMENT

Drag Racing

SPEED RATING

--

WHEEL DIAMETER

16"-17"-18"

OPEN COUNTRY SxS



SIDE-BY-SIDE OFF-ROAD

DRY PERFORMANCE N/A

WET PERFORMANCE N/A

BRAKING N/A

TREAD LIFE N/A

OFF-ROAD TRACTION **5.0**

UTQG

N/A

VEHICLE & APPLICATION SEGMENT

Side-by-Side Off-Road Vehicles

SPEED RATING

--

WHEEL DIAMETER

15"

COMPETITION



DOT COMPETITION TIRE

The Proxes R888R DOT competition tire* is an evolution of the race-winning Proxes R888, delivering even faster lap times and better dry handling. The credit goes to a new tread design and an improved contact patch that puts more rubber on the track. Racers will also appreciate the predictable handling and how quickly the Proxes R888R reaches optimal operating temperature.

*Caution: Recommended for competition events only.

POPULAR FITMENTS

Chevrolet Corvette
BMW 3-Series
BMW 4-Series
Porsche 911
Porsche Cayman

UTQG

100 AA A

HIGH-GRIP RACE COMPOUND

- Reaches optimal operating temperature quickly and provides consistent performance.
- Improves grip for excellent cornering performance.

OPTIMIZED CONTACT PATCH

- Improves dry traction in braking, acceleration and cornering.

LARGE TREAD BLOCKS ON OUTSIDE TREAD

- Maximize lateral grip for improved cornering.

WIDE CENTER RIB

- Improves directional stability and precise steering response.

WATER EVACUATION CHANNEL

- Assists with wet traction.

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES R888R:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: 32 to 38 (psi)
- Camber: -1° to -3°
- Caster: As much positive as possible



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	185/60R13	80V	SL	BSW	103180	5.0-(5.5)-6.5	17	6.3	21.7	7.4	992	51	956
	205/60R13	86V	SL	BSW	103200	5.5-(6.0)-7.5	20	6.3	22.7	8.2	1168	51	916
	225/45R13	84V	SL	BSW	104530	7.0-(7.5)-8.5	19	6.3	20.9	8.9	1102	51	992
14	185/60R14	82V	SL	BSW	103190	5.0-(5.5)-6.5	19	6.3	22.8	7.4	1047	51	913
15	195/50R15	82V	SL	BSW	102740	5.5-(6.0)-7.0	19	6.3	22.7	7.9	1047	51	914
	195/55R15	89V	XL	BSW	109820	5.5-(6.0)-7.0	20	6.3	23.4	7.9	1279	50	887
	205/50ZR15	89W	XL	BSW	107710	5.5-(6.5)-7.5	21	6.3	23.1	8.4	1279	50	899
	225/45ZR15	87W	SL	BSW	104470	7.0-(7.5)-8.5	21	6.3	23.0	8.9	1201	51	905
	225/50ZR15	91W	SL	BSW	103510	6.0-(7.0)-8.0	23	6.3	23.9	9.2	1356	51	869
	235/50ZR15	94W	SL	BSW	104320	6.5-(7.5)-8.5	23	6.3	24.3	9.6	1477	51	855
16	195/50ZR16	84W	SL	BSW	103500	5.5-(6.0)-7.0	20	6.3	23.7	7.9	1102	51	876
	205/45ZR16	87W	XL	BSW	107740	6.5-(7.0)-7.5	21	6.3	23.2	8.1	1201	50	894
	205/50ZR16	87W	SL	BSW	103810	5.5-(6.5)-7.5	22	6.3	24.1	8.4	1201	51	862
	205/55ZR16	94W	XL	BSW	104310	5.5-(6.5)-7.5	23	6.3	24.9	8.4	1477	50	835
	225/45ZR16	93W	XL	BSW	107750	7.0-(7.5)-8.5	23	6.3	23.9	8.9	1433	50	868
	245/45ZR16	94W	SL	BSW	104330	7.5-(8.0)-9.0	24	6.3	24.6	9.6	1477	51	843
	255/50ZR16	99W	SL	BSW	104480	7.0-(8.0)-9.0	28	6.3	26.1	10.4	1709	51	797
17	205/40ZR17	80W	SL	BSW	103540	7.0-(7.5)-8.0	20	6.3	23.5	8.3	992	51	885
	205/40ZR17	84W	XL	BSW	104740	7.0-(7.5)-8.0	21	6.3	23.5	8.3	1102	50	885
	205/45ZR17	88W	XL	BSW	104540	6.5-(7.0)-7.5	22	6.3	24.3	8.1	1235	50	857
	205/50ZR17	89W	SL	BSW	103820	5.5-(6.5)-7.5	23	6.3	25.1	8.4	1279	51	827
	215/45ZR17	91W	XL	BSW	104660	(7.0) -8.0	23	6.3	24.6	8.4	1356	50	843
	225/45ZR17	94W	XL	BSW	106910	7.0-(7.5)-8.5	24	6.3	25.0	8.9	1477	50	832
	235/40ZR17	94W	SL	BSW	106970	8.0-(8.5)-9.5	23	6.3	24.4	9.5	1477	50	851
	235/45ZR17	94W	SL	BSW	103860	7.5-(8.0)-9.0	25	6.3	25.4	9.3	1477	51	819
	245/40ZR17	91W	SL	BSW	104510	8.0-(8.5)-9.5	25	6.3	24.7	9.8	1356	51	840
	255/40ZR17	98W	XL	BSW	109530	8.5-(9.0)-10.0	26	6.3	25.0	10.2	1653	50	830
	275/40ZR17	98W	SL	BSW	104520	9.0-(9.5)-11.0	28	6.3	25.7	10.9	1653	51	809
315/35ZR17	102W	SL	BSW	104430	10.5-(11.0)-12.5	31	6.3	25.7	12.6	1874	51	809	
18	225/40ZR18	92Y	XL	BSW	102700	7.5-(8.0)-9.0	24	6.3	25.1	9.1	1389	50	828
	235/40ZR18	95Y	XL	BSW	104750	8.0-(8.5)-9.5	25	6.3	25.4	9.5	1521	50	818
	245/40ZR18	97Y	XL	BSW	107720	8.0-(8.5)-9.5	28	6.3	25.7	9.8	1609	50	808
	255/35ZR18	94Y	XL	BSW	106980	8.5-(9.0)-10.0	25	6.3	25.0	10.2	1477	50	831
	265/35ZR18	97Y	XL	BSW	104570	9.0-(9.5)-10.5	27	6.3	25.3	10.7	1609	50	821
	275/35ZR18	95Y	SL	BSW	104260	9.0-(9.5)-11.0	28	6.3	25.6	10.9	1521	51	813
	295/30ZR18	98Y	XL	BSW	104270	10.0-(10.5)-11.0	29	6.3	25.0	11.9	1653	50	831
	305/35ZR18	105Y	XL	BSW	104460	10.0-(11.0)-12.0	32	6.3	26.4	12.3	2039	50	786
	315/30ZR18	98Y	SL	BSW	104370	10.5-(11.0)-11.5	31	6.3	25.5	12.6	1653	51	816
	335/30ZR18	102Y	SL	BSW	104340	11.5-(12.0)-12.5	33	6.3	25.9	13.5	1874	51	801
19	235/35ZR19	91(Y)	XL	BSW	103840	8.0-(8.5)-9.5	25	6.3	25.5	9.5	1356	50	816
	245/35ZR19	89(Y)	SL	BSW	104440	8.0-(8.5)-9.5	25	6.3	25.8	9.8	1279	51	806
	265/30ZR19	93Y	XL	BSW	107730	9.0-(9.5)-10.0	27	6.3	25.3	10.7	1433	50	821
	265/35ZR19	94(Y)	SL	BSW	104490	9.0-(9.5)-10.5	29	6.3	26.3	10.7	1477	51	789
	265/40ZR19	98(Y)	SL	BSW	104500	9.0-(9.5)-10.5	30	6.3	27.4	10.7	1653	51	759
	275/35R19	96(Y)	SL	BSW	104420	9.0-(9.5)-11.0	30	6.3	26.6	10.9	1565	51	782
	285/35ZR19	99(Y)	SL	BSW	104450	9.5-(10.0)-11.0	31	6.3	26.9	11.4	1709	51	773
	295/30ZR19	100Y	XL	BSW	104280	10.0-(10.5)-11.0	30	6.3	26.0	11.9	1764	50	798
	305/30ZR19	102(Y)	XL	BSW	104290	10.5-(11.0)-11.5	32	6.3	26.3	12.3	1874	50	791
	325/30ZR19	101(Y)	SL	BSW	104380	11.0-(11.5)-12.0	33	6.3	26.7	13.0	1819	51	777
20	345/30ZR19	105(Y)	SL	BSW	104350	11.5-(12.0)-12.5	36	6.3	27.2	13.8	2039	51	764
	255/35ZR20	93(Y)	SL	BSW	104400	8.5-(9.0)-10.0	29	6.3	27.0	10.2	1433	51	769
	285/30ZR20	95(Y)	SL	BSW	104560	9.5-(10.0)-10.5	31	6.3	26.8	11.4	1521	51	776
	285/35ZR20	100(Y)	SL	BSW	104150	9.5-(10.0)-11.0	33	6.3	27.9	11.4	1764	51	745
	305/35ZR20	104(Y)	SL	BSW	104410	10.0-(11.0)-12.0	35	6.3	28.4	12.3	1984	51	731
	315/30ZR20	101(Y)	SL	BSW	104300	10.5-(11.0)-11.5	35	6.3	27.5	12.6	1819	51	756
325/30ZR20	102(Y)	SL	BSW	104390	11.0-(11.5)-12.0	35	6.3	27.7	13.0	1874	51	750	

COMPETITION



Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "[Y]" = 195mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

DOT COMPETITION TIRE

Race-ready off the shelf with a 4/32" deep tread, the Proxes RR delivers consistent lap times and predictable handling on dry tracks. This DOT competition tire* is ideal for NASA road racing, track days and high-performance driving schools. The symmetric two-groove tread design and special tread compound provide a maximum contact patch and ultimate dry traction with superior cornering force.

*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

Race-prepared vehicles in NASA Spec classes:
Spec Miata
Spec E30
Spec 944
American Iron
Honda Challenge

UTQG

40 C A



Toyo Tires is the official tire of NASA and the spec tire of record in numerous classes.

RACING TREAD COMPOUND

- Increases grip and improves lap times.

REINFORCED SIDEWALL AND HIGH-MODULUS BEAD FILLER

- Provide excellent steering response and feedback.

WEAR INSPECTION HOLES

- Provide easy tread depth measurement from any position.

SIDEWALL MARKING AREA


- Allows for easy labeling on the sidewall.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	205/60R13	86V	SL	BSW	255150	5.5-(6.0)-7.5	19	3.7	22.7	8.2	1168	51	916
	205/50ZR15		SL	BSW	255000	5.5-(6.5)-7.5	20	3.7	23.0	8.5	1168	51	902
15	225/45ZR15		SL	BSW	255140	7.0-(7.5)-8.5	21	3.7	23.0	8.9	1201	51	905
	225/50ZR15		SL	BSW	255080	6.0-(7.0)-8.0	22	3.7	23.9	9.2	1356	51	869
	245/40ZR15		SL	BSW	255240	8.0-(8.5)-9.5	21	3.7	22.7	9.8	1235	51	914
16	225/50R16		SL	BSW	255160	6.0-(7.0)-8.0	24	3.7	24.9	9.2	1389	51	835
	245/45ZR16		SL	BSW	255130	7.5-(8.0)-9.0	23	3.7	24.6	9.6	1477	51	843
17	225/45ZR17		SL	BSW	255270	7.0-(7.5)-8.5	23	3.7	25.0	8.9	1356	51	832
	235/40ZR17		SL	BSW	255120	8.0-(8.5)-9.5	22	3.7	24.4	9.5	1323	51	851
	245/40ZR17		SL	BSW	255260	8.0-(8.5)-9.5	23	3.7	24.7	9.8	1356	51	840
	255/40ZR17		SL	BSW	255110	8.5-(9.0)-10.0	24	3.7	25.0	10.2	1477	51	830
	275/40ZR17		SL	BSW	255100	9.0-(9.5)-11.0	28	3.7	25.7	10.9	1653	51	809
18	255/35ZR18		SL	BSW	255300	8.5-(9.0)-10.0	25	3.7	25.0	10.2	1323	51	831
	P275/35ZR18		LL	BSW	255070	9.0-(9.5)-11.0	26	3.7	25.6	10.9	1201	44	813
	285/30ZR18		SL	BSW	255250	9.5-(10.0)-10.5	26	3.7	24.8	11.4	1433	51	839
	295/30ZR18		SL	BSW	255210	10.0-(10.5)-11.0	28	3.7	25.0	11.9	1477	51	831
	P305/35R18		LL	BSW	255170	10.0-(11.0)-12.0	30	3.7	26.4	12.3	1433	44	786
	315/30ZR18		SL	BSW	255180	10.5-(11.0)-11.5	29	3.7	25.5	12.6	1653	51	816
19	345/35ZR18		SL	BSW	255290	11.5-(12.0)-13.5	35	3.7	27.5	13.8	2271	51	755
	235/35ZR19		SL	BSW	255230	8.0-(8.5)-9.5	23	3.7	25.5	9.5	1201	51	816
	295/30ZR19		SL	BSW	255220	10.0-(10.5)-11.0	30	3.7	26.0	11.9	1565	51	798
	345/30ZR19		SL	BSW	255280	11.5-(12.0)-12.5	33	3.7	27.2	13.8	2039	51	764
20	255/35ZR20	(93V)	SL	BSW	255310	8.5-(9.0)-10.0	27	3.7	27.0	10.2	1433	51	769
	285/30ZR20	(95V)	SL	BSW	255190	9.5-(10.0)-10.5	29	3.7	26.8	11.4	1521	51	776
	285/35ZR20	(100Y)	SL	BSW	255200	9.5-(10.0)-11.0	32	3.7	27.9	11.4	1764	51	745
	315/30ZR20	(101Y)	SL	BSW	255320	10.5-(11.0)-11.5	33	3.7	27.5	12.6	1819	51	756
	325/30ZR20	(102Y)	SL	BSW	255330	11.0-(11.5)-12.0	34	3.7	27.7	13.0	1874	51	750

COMPETITION

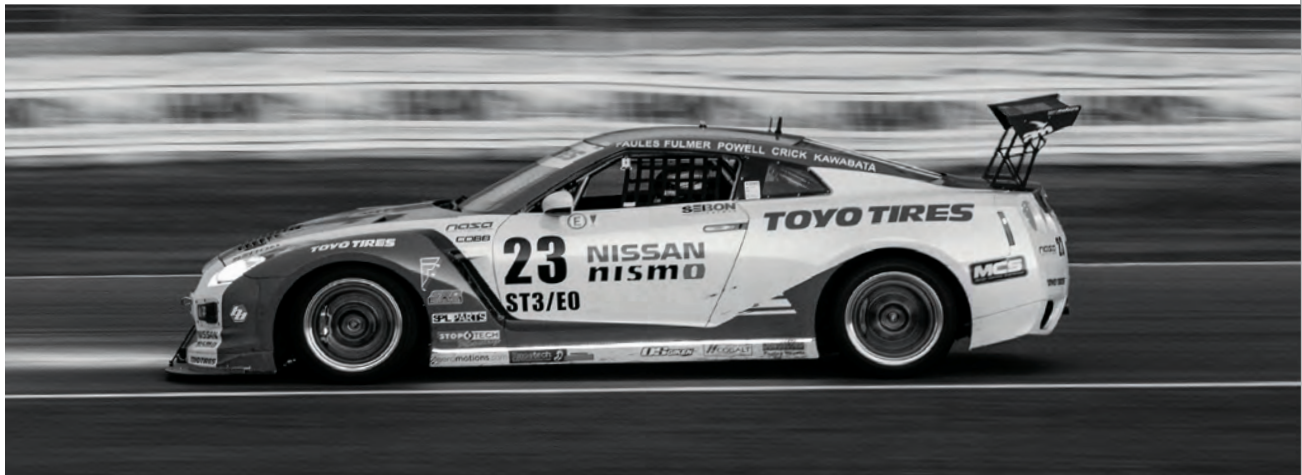

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RR:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (psi)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

DOT COMPETITION TIRE

The design and components of the Proxes RA1 came from our experience in winning races all over the world. This DOT competition tire* is well-known by road racers for delivering quick lap times, consistency and long wear. Full 8/32" tread depth provides good competitive wet traction, while shaving to 4/32" improves dry traction.

*Caution: Recommended for competition events only.

POPULAR FITMENTS

Race-prepared vehicles such as:
BMW E30
Honda Civic
Honda CRX
Honda S2000
Mazda Miata MX-5

UTQG

100 AA A



Toyo Tires is the official tire of NASA and the spec tire of record in numerous classes.

SOFT BUT DURABLE R-COMPOUND

- Improves grip for better competitive handling and performance.

STEPPED TREAD DESIGN

- Improves dry traction due to increased tread area and limited void.
- Assists with wet traction due to groove arrangement.

TREAD DEPTH INDICATORS

- Allow for more accurate tread depth measurement near the shoulders.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	205/50ZR15		SL	BSW	236840	5.5-(6.5)-7.5	20	8.0	23.1	8.4	1135	44	899
	225/45ZR15		SL	BSW	236970	7.0-(7.5)-8.5	23	8.0	22.9	9.0	1201	44	908
	225/50ZR15		SL	BSW	236830	6.0-(7.0)-8.0	23	8.0	23.9	9.2	1323	44	869
16	225/50ZR16		SL	BSW	236890	6.0-(7.0)-8.0	23	8.0	24.9	9.2	1390	44	835
	245/45ZR16		SL	BSW	236800	7.5-(8.0)-9.0	25	8.0	24.7	9.6	1477	44	843
	P255/50ZR16		SL	BSW	236880	7.0-(8.0)-9.0	27	8.0	26.1	10.4	1687	44	797
17	235/40ZR17		SL	BSW	236760	8.0-(8.5)-9.5	24	8.0	24.4	9.6	1323	44	852
	255/40ZR17		SL	BSW	236770	8.5-(9.0)-10.0	26	8.0	25.0	10.4	1477	44	828
	275/40ZR17		SL	BSW	236780	9.0-(9.5)-11.0	29	8.0	25.7	10.9	1653	44	809
18	275/35ZR18		SL	BSW	236710	9.0-(9.5)-11.0	30	8.0	25.6	10.9	1521	44	812



COMPETITION



SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RA1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (psi)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

FULL-SLICK COMPETITION TIRE

The Proxes RS1 is a full-slick competition tire* that provides consistent performance throughout the life of the tire. This race tire is excellent in dry braking and built to endure closed-course road racing, time attack, track days and high-performance driving schools. Compound, construction and design contribute to its durability, responsive handling and high-speed performance in dry weather conditions.

*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

Race-prepared vehicles such as:
Nissan GT-R
Porsche GT-3
Chevrolet Camaro
Ford Mustang

ADVANCED RAYON CASING

- Provides durability and stability at high speed.

HIGH-MODULUS BEAD FILLER AND STEEL-REINFORCED SIDEWALL

- Provide crisp and responsive handling.
- Offer excellent steering response and feel.

DURABLE, RACE-PROVEN COMPOUND

- Contributes to excellent dry braking.
- Offers excellent wear resistance.
- Provides high grip levels across a wide temperature range.


SPIRAL-WOUND CAP PLY

- Provides uniformity and consistency.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
18	245/640R18	SL	BSW	163460	8.5	25	25.4	9.8	N/A	N/A	818
	285/650R18	SL	BSW	171680	10.0	27	25.5	11.1	N/A	N/A	814
	285/680R18	SL	BSW	163450	10.0	31	26.7	11.7	N/A	N/A	778
	335/710R18	SL	BSW	171440	12.0	34	27.7	13.4	N/A	N/A	749

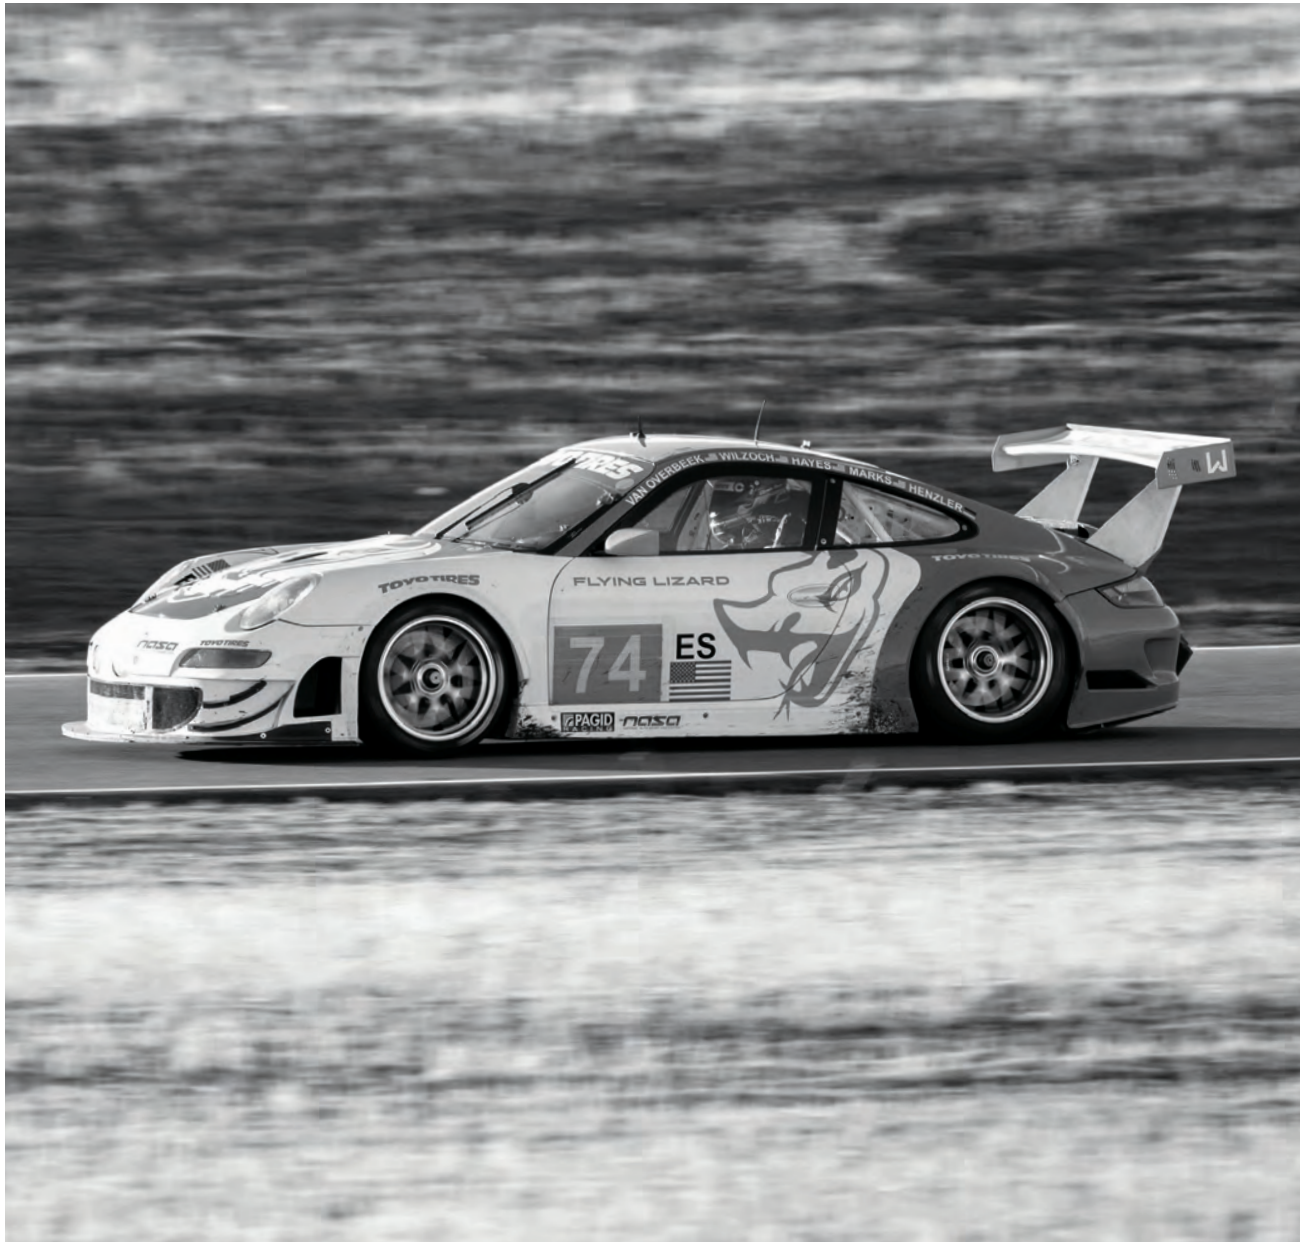

COMPETITION



SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RS1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (psi)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

*"SL" = Standard Load, "BSW" = Black Sidewall.
Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

DOT DRAG RADIAL

This DOT drag radial* was designed to help muscle cars and street machines transfer power to the ground. An optimized tread design coupled with a unique tread compound and strengthened radial construction give superior grip, straight-line performance and high-speed stability as you blast down the track. The Proxes TQ is also designed to be quiet on the drive home.

*Caution: Use extreme caution and reduced speed when driving in wet conditions. Recommended for competition events only.

POPULAR FITMENTS

Race-prepared late-model
American muscle cars such as:
Chevrolet Camaro
Dodge Challenger
Ford Mustang
Pontiac Firebird

UTQG

0 B B

DRAG RADIAL TREAD COMPOUND

- Maximizes grip at launch.

DUAL-PURPOSE ASYMMETRIC TREAD DESIGN

- Optimizes performance for track and street use with two distinct tread areas.

SEMI-SLICK INNER AREA

- Improves traction on independent rear-suspension vehicles while maintaining consistent grip on straight-axle, rear-suspension vehicles.

VARIABLE-PITCH OUTER AREA

- Reduces pattern noise when on the street.

DRAG-RACE CONSTRUCTION WITH SPECIAL DRAG-RACE RADIAL CARCASS

- Helps the tire maintain a large, consistent contact patch for increased traction throughout a drag run.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX. LOAD (LBS)	MAX. PRESSURE (PSI)	REVS PER MILE
16	P255/50R16	SL	BSW	172020	7.0- (8.0) -9.0	28	6.4	26.1	10.4	1687	44	796
	P275/45R16	LL	BSW	172070	8.5- (9.0) -10.5	27	6.4	25.8	10.8	1477	44	806
17	P275/40R17	LL	BSW	172010	9.0- (9.5) -11.0	28	6.4	25.8	11.0	1433	44	805
	P315/35R17	LL	BSW	172030	10.5- (11.0) -12.5	31	6.4	25.6	12.6	1433	44	813
	P345/40R17	LL	BSW	172050	11.5- (12.0) -13.5	36	6.4	27.7	13.7	2094	44	749
18	P315/35R18	LL	BSW	172060	10.5- (11.0) -12.5	31	6.4	26.6	12.5	1521	44	780



COMPETITION



SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES TQ:

- Minimum Inflation Pressure for the Track: 15 psi
- Recommended Inflation Pressure: Start with a cold tire inflation pressure of 17 psi. Adjust the tire inflation pressure up or down in 1-psi increments to achieve the desired results. Use as much pressure as possible for track conditions without causing the tire to slip. Higher inflation pressures will improve reaction time, stability and rolling resistance.

"LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

SIDE-BY-SIDE OFF-ROAD TIRE

The Open Country SxS delivers the performance and design features of the race-winning Open Country M/T-R in a smaller package specifically designed for side-by-side vehicles. Its large diameter provides high ground clearance for tackling obstacles. Durable construction and advanced compounds developed through strenuous motorsports testing provide responsive off-road traction on rocky paths, muddy trails and uneven surfaces.

WARNING: NOT FOR HIGHWAY USE.
SEE WARNING, SAFETY AND TIRE
USAGE INFORMATION AT:
TOYOTIRES.COM/OPEN-COUNTRY-SXS

POPULAR FITMENTS

Polaris RZR
Can-Am Maverick
Arctic Cat Wildcat

HIGH-GRIP TREAD COMPOUND AND STIFF SIDEWALL COMPOUND

- Deliver superior cornering and off-road performance.
- Provide resistance to cuts, chips, impacts and abrasions.

OPEN SCALLOPED SHOULDER BLOCKS

- Enhance traction in mud, sand and rocks.
- Improve precision in hard turns.

AGGRESSIVE TREAD DESIGN WITH HOOK-SHAPED BLOCKS AND A HIGH VOID RATIO

- Grips the terrain to deliver excellent off-road traction.

MUD AND STONE EJECTORS

- Help reduce compacted mud and release stones from the grooves.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	32X9.50R15LT	-	BSW	361180	6.0-(7.0)-8.0	44	18.0	31.8	9.4	1820	35	654
	35X9.50R15LT	-	BSW	361210	6.0-(7.5)-8.0	51	18.0	34.5	9.4	2205	35	602



COMPETITION



BSW = Black Sidewall. Bold designates measuring rim width.
**Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES®

PASSENGER CAR

COMPE





FORT

PASSENGER CAR



EXTENSA HP II



HIGH PERFORMANCE ALL-SEASON

- DRY HANDLING 3.5
- WET HANDLING 4.5
- RIDE COMFORT 3.0
- QUIET RIDE 4.0
- TREAD LIFE 3.5
- WINTER HANDLING 2.5
- FUEL EFFICIENCY 3.5

UTQG

500 A A

MILEAGE WARRANTY

45,000 miles*

VEHICLE & APPLICATION SEGMENT

Passenger Cars
Luxury Cars
Direct OE Replacement
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

15"-16"-17"-18"-19"-20"-22"

EXTENSA A/S II



TOURING ALL-SEASON

- DRY HANDLING 3.0
- WET HANDLING 3.5
- RIDE COMFORT 4.5
- QUIET RIDE 4.0
- TREAD LIFE 4.5
- WINTER HANDLING 4.0
- FUEL EFFICIENCY 4.0

UTQG

T-/H-Rated: 620 A A, 620 A B and
620 B A
V-Rated: 580 A A

MILEAGE WARRANTY

Up to 75,000 miles*

VEHICLE & APPLICATION SEGMENT

Passenger Cars
CUVs and SUVs
Minivans
Light Trucks

SPEED RATING

T-H-V

WHEEL DIAMETER

14"-15"-16"-17"-18"-19"-20"

CELSIUS



PASSENGER ALL-WEATHER

- DRY HANDLING 3.0
- WET HANDLING 3.5
- RIDE COMFORT 4.5
- QUIET RIDE 3.5
- TREAD LIFE 4.0
- WINTER HANDLING 5.0
- FUEL EFFICIENCY 4.0
- SNOW TRACTION 5.0
- ICE TRACTION 5.0

UTQG

S-Rated: 400 A B
T-Rated: 420 A B, 440 A B
H-/V-/W-Rated: 440 A A

MILEAGE WARRANTY

60,000 miles*

VEHICLE & APPLICATION SEGMENT

Luxury Cars
Passenger Cars
Direct OE Replacement

SPEED RATING

S-T-H-V-W

WHEEL DIAMETER

14"-15"-16"-17"-18"-19"-20"



PASSENGER CAR:

Our tires are engineered to meet the highest expectations of quality, comfort and performance. Add increased tread life and improved fuel economy, and driving on our tires is both practical and enjoyable. No matter what you drive, whether it's a passenger car or a CUV, Toyo Tires turns every experience behind the wheel into a pleasure.



PASSENGER CAR

P

HIGH PERFORMANCE ALL-SEASON TIRE

The Extensa HP II delivers superb all-season handling, a comfortable ride and a 45,000-mile warranty. This value-driven, high-performance tire is the perfect balance between high quality, outstanding performance and dynamic styling. The Extensa HP II stops up to 31 feet shorter in wet conditions than its predecessor.^\

MILEAGE WARRANTY*

45,000-miles

POPULAR FITMENTS

Chevrolet Camaro
Ford Mustang
Honda Civic Si
Hyundai Veloster
Infiniti G35
Subaru Impreza WRX
Toyota 86

UTQG

500 A A



UNIDIRECTIONAL TREAD DESIGN

- Provides a perfect blend of all-season traction in a stylish package.

SINGLE-CUT AND DOUBLE-CUT TAPERS

- Optimize block stiffness to enhance braking performance.

FULL-DEPTH MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve light snow traction.

SPECIAL SILICA COMPOUND

- Provides good wet performance while maintaining tread life performance.



^\Performance claim based upon commissioned third-party test results. Wet braking based on test of Toyo Extensa® HP™ 215/45R17 and Toyo Extensa® HP II™ 215/45R17 tires from 60 to 0 MPH. Individual results may vary.

*See toyotires.com for details.

SPECIFICATIONS

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/45R15	78V	SL	BSW	196310	6.0-(6.5)-7.5	15	8.9	21.9	7.7	937	51	947	
	195/50R15	86V	XL	BSW	196180	5.5-(6.0)-7.0	16	8.9	22.7	7.9	1168	50	914	
	195/55R15	85V	SL	BSW	196190	5.5-(6.0)-7.0	16	8.9	23.4	7.9	1135	51	887	
16	185/55R16	83V	SL	BSW	196390	5.0-(6.0)-6.5	18	8.8	24.0	7.6	1074	51	865	
	195/50R16	84V	SL	BSW	196300	5.5-(6.0)-7.0	20	8.9	23.7	7.9	1102	51	877	
	195/55R16	87V	SL	BSW	196360	5.5-(6.0)-7.0	20	8.9	24.4	7.9	1201	51	851	
	205/45R16	87V	XL	BSW	196290	6.5-(7.0)-7.5	18	9.1	23.2	8.1	1201	50	894	
	205/50R16	91V	XL	BSW	196210	5.5-(6.5)-7.5	21	9.1	24.1	8.4	1356	50	862	
	205/55R16	94V	XL	BSW	196340	5.5-(6.5)-7.5	22	9.1	24.9	8.4	1477	50	835	
	215/55R16	97V	XL	BSW	196430	6.0-(7.0)-7.5	24	9.2	25.3	8.9	1609	50	822	
	225/50R16	92V	SL	BSW	196350	6.0-(7.0)-8.0	22	9.3	24.9	9.2	1389	51	835	
	245/50R16	97V	SL	BSW	196460	7.0-(7.5)-8.5	26	9.6	25.7	10.0	1609	51	809	
17	205/40R17	84W	XL	BSW	196370	7.0-(7.5)-8.0	19	9.1	23.5	8.3	1102	50	885	
	205/45R17	88W	XL	BSW	196550	6.5-(7.0)-7.5	20	9.1	24.3	8.1	1235	50	857	
	205/50R17	93W	XL	BSW	196110	5.5-(6.5)-7.5	21	9.1	25.1	8.4	1433	50	827	
	215/45R17	91W	XL	BSW	196070	7.0-(7.0)-8.0	20	9.2	24.6	8.4	1356	50	843	
	215/50R17	95W	XL	BSW	196530	6.0-(7.0)-7.5	23	9.2	25.5	8.9	1521	50	814	
	215/55R17	94V	SL	BSW	196050	6.0-(7.0)-7.5	24	9.2	26.3	8.9	1477	51	790	
	225/45R17	94W	XL	BSW	196090	7.0-(7.5)-8.5	21	9.3	25.0	8.9	1477	50	832	
	225/50R17	98W	XL	BSW	196040	6.0-(7.0)-8.0	24	9.3	25.9	9.2	1653	50	802	
	225/55R17	97V	SL	BSW	196150	6.0-(7.0)-8.0	27	9.3	26.8	9.2	1609	51	776	
	235/45R17	97W	XL	BSW	196120	7.5-(8.0)-9.0	23	9.4	25.4	9.3	1609	50	819	
	235/55R17	99V	SL	BSW	196440	6.5-(7.5)-8.5	27	9.4	27.2	9.6	1709	51	765	
	245/45R17	99W	XL	BSW	196490	7.5-(8.0)-9.0	26	9.6	25.7	9.6	1709	50	809	
	255/45R17	98W	SL	BSW	196570	8.0-(8.5)-9.5	27	9.7	26.1	10.0	1653	51	797	
	275/40R17	98W	SL	BSW	196230	9.0-(9.5)-11.0	27	10.0	25.7	10.9	1653	51	809	
	315/35R17	102W	SL	BSW	196470	10.5-(11.0)-12.5	31	10.5	25.7	12.6	1874	51	809	
18	225/40R18	92W	XL	BSW	196030	7.5-(8.0)-9.0	22	9.3	25.1	9.1	1389	50	828	
	225/45R18	95W	XL	BSW	196020	7.0-(7.5)-8.5	23	9.3	25.9	8.9	1521	50	801	
	225/50R18	99W	XL	BSW	196410	6.0-(7.0)-8.0	26	9.3	26.9	9.2	1709	50	773	
	235/40R18	95W	XL	BSW	196510	8.0-(8.5)-9.5	24	9.4	25.4	9.5	1477	50	818	
	235/45R18	94W	SL	BSW	196400	7.5-(8.0)-9.0	25	9.4	26.3	9.3	1477	51	789	
	235/50R18	101W	XL	BSW	196140	6.5-(7.5)-8.5	24	9.4	27.3	9.6	1819	50	761	
	245/40R18	97W	XL	BSW	196260	8.0-(8.5)-9.5	28	9.6	25.7	9.8	1609	50	808	
	245/45R18	100W	XL	BSW	196160	7.5-(8.0)-9.0	24	9.6	26.7	9.6	1764	50	779	
	245/55R18	103V	SL	BSW	196220	7.0-(7.5)-8.5	31	9.6	28.6	10.0	1929	51	726	
	255/35R18	94W	XL	BSW	196520	8.5-(9.0)-10.0	25	9.7	25.0	10.2	1521	50	831	
	255/45R18	103W	XL	BSW	196540	8.0-(8.5)-9.5	28	9.7	27.0	10.0	1929	50	768	
	275/40R18	99W	SL	BSW	196580	9.0-(9.5)-11.0	29	10.0	26.7	10.9	1709	51	779	
19	235/35R19	91W	XL	BSW	196420	8.0-(8.5)-9.5	23	9.4	25.5	9.5	1356	50	816	
	245/40R19	98W	XL	BSW	196500	8.0-(8.5)-9.5	27	9.6	26.7	9.8	1653	50	777	
	245/45R19	102W	XL	BSW	196240	7.5-(8.0)-9.0	24	9.6	27.7	9.6	1874	50	751	
	255/35R19	96W	XL	BSW	196320	8.5-(9.0)-10.0	26	9.7	26.0	10.2	1565	50	798	
	275/40R19	105W	XL	BSW	196590	9.0-(9.5)-11.0	32	10.0	27.7	10.9	2039	50	751	
20	225/35R20	90W	XL	BSW	196270	7.5-(8.0)-9.0	22	9.3	26.2	9.1	1323	50	792	
	245/35R20	95W	XL	BSW	196060	8.0-(8.5)-9.5	24	9.6	26.8	9.8	1521	50	776	
	245/40R20	99W	XL	BSW	196330	8.0-(8.5)-9.5	25	9.6	27.7	9.8	1709	50	750	
	245/45R20	103W	XL	BSW	196250	7.5-(8.0)-9.0	25	9.6	28.7	9.6	1929	50	725	
	255/35R20	97W	XL	BSW	196380	8.5-(9.0)-10.0	27	9.7	27.0	10.2	1609	50	769	
	275/30R20	97W	XL	BSW	196450	9.0-(9.5)-10.0	27	10.0	26.5	10.9	1609	50	783	
	275/35R20	102W	XL	BSW	196480	9.0-(9.5)-11.0	29	10.0	27.6	10.9	1874	50	754	
	275/40R20	106W	XL	BSW	196280	9.0-(9.5)-11.0	28	10.0	28.7	10.9	2094	50	725	
22	265/35R22	102V	XL	BSW	196600	9.0-(9.5)-10.5	33	9.8	29.3	10.7	1874	50	708	

PASSENGER CAR

P

Speed rated "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOURING ALL-SEASON TIRE

The Extensa A/S II is our value-oriented all-season tire for passenger cars, minivans, SUVs, CUVs and light trucks. It delivers long tread life and a comfortable ride with the quality you expect from Toyo Tires. Owners will enjoy better wet braking and handling and increased fuel efficiency over its predecessor. The Extensa A/S II also comes with up to a 75,000-mile treadwear warranty, plus it's backed by our 500-mile Trial Offer.

MILEAGE WARRANTY*

T-/H-rated: 75,000-miles
V-rated: 65,000-miles

POPULAR FITMENTS

Chevrolet Malibu
Dodge Grand Caravan
Ford Ranger
Honda Civic
Lexus ES 350
Toyota RAV4

UTQG

T-rated: 620 A B
H-rated: 620 A A and
620 B A
V-rated: 580 A A



SPECIAL SILICA COMPOUND

- Delivers better wet performance.
- Improves fuel efficiency.

FOUR WIDE MAIN GROOVES

- Evacuate water to improve wet traction.

IMPROVED RIB DESIGN

- Creates more even contact pressure with the road surface for improved braking and handling.

MULTI-WAVE SIPES

- Minimize irregular wear for longer tread life and a smooth, quiet ride.
- Improve wet and dry performance.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
14	P175/65R14	81T	SL	BSW	147040	(5.0) -6.0	16	10.8	23.0	7.0	1019	44	904
	185/65R14	86H	SL	BSW	148310	5.0- (5.5) -6.5	17	11.0	23.5	7.4	1168	51	885
	185/70R14	88T	SL	BSW	148350	4.5- (5.5) -6.0	18	11.0	24.3	7.4	1235	44	857
	P195/70R14	90T	SL	BSW	148330	5.0- (6.0) -6.5	19	11.1	24.8	7.9	1312	44	838
	P195/75R14	92T	SL	BSW	147100	5.0- (5.5) -6.5	20	11.1	25.5	7.7	1400	44	814
	P205/75R14	95T	SL	BSW	148250	5.0- (5.5) -7.0	24	11.2	26.1	8.0	1532	44	795
	P215/70R14	96T	SL	BSW	148340	5.5- (6.5) -7.0	21	11.3	25.9	8.7	1554	44	802
15	P175/65R15	84H	SL	BSW	148000	(5.0) -6.0	19	10.8	24.0	7.0	1102	51	866
	P185/60R15	84H	SL	BSW	148190	5.0- (5.5) -6.5	18	11.0	23.7	7.4	1102	51	875
	185/65R15	88H	SL	BSW	147860	5.0- (5.5) -6.5	17	11.0	24.4	7.4	1235	51	850
	195/60R15	88H	SL	BSW	147970	5.5- (6.0) -7.0	18	11.1	24.2	7.9	1235	51	858
	195/65R15	91H	SL	BSW	147060	5.5- (6.5) -7.0	19	11.1	25.0	7.9	1356	51	831
	205/65R15	94H	SL	BSW	147980	5.5- (6.0) -7.5	21	11.2	25.5	8.2	1477	51	816
	P205/70R15	95T	SL	BSW	148290	5.0- (6.0) -7.0	24	11.2	26.3	8.2	1499	44	789
	P205/75R15	97T	SL	BSW	147870	5.0- (5.5) -7.0	24	11.2	27.1	8.0	1598	44	766
	P215/60R15	93H	SL	BSW	148380	6.0- (6.5) -7.5	23	11.3	25.2	8.7	1411	51	826
	P215/65R15	95T	SL	BSW	148370	6.0- (6.5) -7.5	23	11.3	26.0	8.7	1510	44	798
	215/70R15	98T	SL	BSW	148270	5.5- (6.5) -7.0	25	11.3	26.9	8.7	1653	44	773
	P215/75R15	100T	SL	BSW	148220	5.0- (6.0) -7.0	24	11.3	27.7	8.5	1742	44	751
	P225/70R15	100T	SL	BSW	148280	6.0- (6.5) -7.5	29	11.5	27.4	9.0	1753	44	757
	P225/75R15	102T	SL	BSW	148230	(6.0) -7.5	31	11.5	28.3	8.8	1874	44	734
P235/75R15	105T	SL	BSW	148170	6.0- (6.5) -8.0	31	11.6	28.9	9.3	2028	44	720	
16	185/60R16	86H	SL	BSW	147910	5.0- (5.5) -6.5	16	11.0	24.7	7.4	1168	51	840
	195/50R16	84H	SL	BSW	148070	5.5- (6.0) -7.0	18	11.1	23.7	7.9	1102	51	877
	195/55R16	87V	SL	BSW	148110	5.5- (6.0) -7.0	19	10.2	24.4	7.9	1201	51	851
	205/55R16	91H	SL	BSW	147050	5.5- (6.5) -7.5	21	11.2	24.9	8.4	1356	51	835
	205/60R16	92H	SL	BSW	147880	5.5- (6.0) -7.5	21	11.2	25.7	8.2	1389	51	809
	205/65R16	95H	SL	BSW	147960	5.5- (6.0) -7.5	22	11.2	26.5	8.2	1521	51	785
	215/55R16	97H	XL	BSW	147950	6.0- (7.0) -7.5	23	11.3	25.3	8.9	1609	50	822
	215/60R16	95H	SL	BSW	147030	6.0- (6.5) -7.5	23	11.3	26.1	8.7	1521	51	795
	215/65R16	98H	SL	BSW	148150	6.0- (6.5) -7.5	25	11.3	27.0	8.7	1653	51	769
	225/55R16	99H	XL	BSW	148360	6.0- (7.0) -8.0	23	11.5	25.7	9.2	1709	50	807
	225/60R16	98H	SL	BSW	148260	6.0- (6.5) -8.0	26	11.5	26.6	9.0	1653	51	781
	225/65R16	100T	SL	BSW	147890	6.0- (6.5) -8.0	28	11.5	27.5	9.0	1764	44	756
	235/60R16	100H	SL	BSW	148210	6.5- (7.0) -8.5	29	11.6	26.6	9.0	1764	51	781
	235/65R16	103T	SL	BSW	147090	6.5- (7.0) -8.5	22	11.6	28.0	9.4	1929	44	741
17	215/50R17	95H	XL	BSW	148200	6.0- (7.0) -7.5	23	11.3	25.5	8.9	1521	50	814
	215/55R17	94H	SL	BSW	147070	6.0- (7.0) -7.5	23	11.3	26.3	8.9	1477	51	790
	215/60R17	96T	SL	BSW	148320	6.0- (6.5) -7.5	26	11.3	27.2	8.7	1565	44	765
	P215/65R17	98T	SL	BSW	148390	6.0- (6.5) -7.5	27	11.3	28.0	8.7	1653	44	741
	225/45R17	94H	XL	BSW	148030	7.0- (7.5) -8.5	22	11.5	25.0	8.9	1477	50	832
	225/50R17	98V	XL	BSW	148160	6.0- (7.0) -8.0	24	10.6	25.9	9.2	1653	50	802
	225/55R17	97H	SL	BSW	148180	6.0- (7.0) -8.0	28	11.5	26.8	9.2	1609	51	776
	225/60R17	99H	SL	BSW	148140	6.0- (6.5) -8.0	26	11.5	27.6	9.0	1709	51	752
	225/65R17	102H	SL	BSW	147940	6.0- (6.5) -8.0	28	11.5	28.5	9.0	1874	51	729
	235/50R17	96H	SL	BSW	148100	6.5- (7.5) -8.5	25	11.6	26.3	9.6	1565	51	790
	235/55R17	99H	SL	BSW	147900	6.5- (7.5) -8.5	27	11.6	27.2	9.6	1709	51	765
	235/60R17	102H	SL	BSW	148010	6.5- (7.0) -8.5	29	11.6	28.1	9.4	1874	51	739
	235/65R17	104H	SL	BSW	147990	6.5- (7.0) -8.5	28	11.6	29.1	9.4	1984	51	715
	225/45R18	95V	XL	BSW	148060	7.0- (7.5) -8.5	23	10.6	25.9	8.9	1521	50	801
225/50R18	95H	SL	BSW	148020	6.0- (7.0) -8.0	25	10.8	26.9	9.2	1521	51	773	
225/60R18	100H	SL	BSW	148300	6.0- (6.5) -8.0	29	11.5	28.6	9.0	1764	51	726	
235/45R18	94V	SL	BSW	147920	7.5- (8.0) -9.0	24	10.7	26.3	9.3	1477	51	789	
235/50R18	97V	SL	BSW	148090	6.5- (7.5) -8.5	27	10.7	27.3	9.6	1609	51	761	
235/55R18	100H	SL	BSW	147930	6.5- (7.5) -8.5	28	11.6	28.1	9.6	1764	51	738	
235/60R18	103H	SL	BSW	143430	6.5- (7.0) -8.5	30	11.6	29.1	9.4	1929	51	714	
245/60R18	105H	SL	BSW	143440	(7.0) -8.5	31	11.7	29.6	9.8	2039	51	703	
19	235/40R19	96V	XL	BSW	143410	8.0- (8.5) -9.5	24	10.7	26.4	9.5	1565	50	786
20	255/50R20	109H	XL	BSW	143420	7.0- (8.0) -9.0	35	11.8	30.1	10.4	2271	50	691

PASSENGER CAR

P

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

PASSENGER ALL-WEATHER TIRE

The Celsius offers year-round versatility plus winter-weather safety in one. This all-weather tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire. The Celsius stops up to 14 feet shorter on snow and 8 feet shorter on ice than a typical all-season tire,[^] plus it's backed by a 60,000-mile warranty.

MILEAGE WARRANTY*

60,000-miles

POPULAR FITMENTS

Ford Taurus
Honda Civic
Hyundai Sonata
Nissan Altima
Toyota Camry
Volkswagen Jetta

UTQG

S-rated: 400 A B.
T-rated: 420 A B and
440 A B.
H-/V-/W-rated:
440 A A.



Three-Peak Mountain Snowflake qualified for severe snow conditions.

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for traction on wet and dry roads.

SNOW CLAWS

- Improve deep snow traction.
- Increase block rigidity for better ice and wet traction.

SLUSH GROOVES

- Increase traction by evacuating slush and snow.

MULTI-WAVE SIPES

- Minimize irregular wear for a smooth, quiet ride.
- Improve braking on icy, wet and dry roads.



[^]Performance claim based upon commissioned third-party test results. Test conducted on 215/60R16 tires. Snow braking from 30 to 0 mph; ice braking from 15 to 0 mph. Individual results may vary. For a copy of the test report, write to Toyo Tire U.S.A. Corp., P.O. Box 6052, Cypress, CA 90630.

*See toyotires.com for details.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
14	185/65R14	86H	SL	BSW	128240	5.0-(5.5)-6.5	16	10.7	23.5	7.4	1168	51	885
	185/60R15	84T	SL	BSW	128250	5.0-(5.5)-6.5	17	10.6	23.7	7.4	1102	44	875
	185/65R15	88H	SL	BSW	128270	5.0-(5.5)-6.5	17	10.7	24.4	7.4	1235	51	850
	195/60R15	88H	SL	BSW	128260	5.5-(6.0)-7.0	19	10.7	24.2	7.9	1235	51	858
	195/65R15	91H	SL	BSW	128280	5.5-(6.0)-7.0	19	10.8	25.0	7.9	1356	51	831
15	205/65R15	94H	SL	BSW	128290	5.5-(6.0)-7.5	20	11.0	25.5	8.2	1477	51	816
	205/70R15	96T	SL	BSW	128300	5.0-(6.0)-7.0	22	11.3	26.3	8.2	1565	44	789
	205/75R15	97S	SL	BSW	128330	5.0-(5.5)-7.0	23	11.3	27.1	8.0	1609	44	766
	215/70R15	98T	SL	BSW	128310	5.5-(6.5)-7.0	24	11.3	26.9	8.7	1653	44	773
	225/70R15	100T	SL	BSW	128320	6.0-(6.5)-7.5	26	11.3	27.4	9.0	1764	44	757
	235/75R15	105S	SL	BSW	128340	6.0-(6.5)-8.0	29	11.3	28.9	9.3	2039	44	720
	185/60R16	86H	SL	BSW	221290	5.0-(5.5)-6.5	19	10.6	24.7	7.4	1168	51	840
	205/55R16	91H	SL	BSW	128350	5.5-(6.5)-7.5	20	10.7	24.9	8.4	1356	51	835
16	205/60R16	92H	SL	BSW	128360	5.5-(6.0)-7.5	21	10.8	25.7	8.2	1389	51	809
	205/65R16	95H	SL	BSW	128400	5.5-(6.0)-7.5	22	11.0	26.5	8.2	1521	51	785
	215/55R16	97H	XL	BSW	221380	6.0-(7.0)-7.5	24	10.2	25.3	8.9	1609	50	822
	215/60R16	95H	SL	BSW	128370	6.0-(6.5)-7.5	24	11.0	26.1	8.7	1521	51	795
	215/65R16	98T	SL	BSW	128410	6.0-(6.5)-7.5	25	11.1	27.0	8.7	1653	44	769
	225/60R16	98H	SL	BSW	128380	6.0-(6.5)-8.0	25	11.1	26.6	9.0	1653	51	781
	235/60R16	100T	SL	BSW	128390	6.5-(7.0)-8.5	27	11.2	27.1	9.4	1764	44	767
	235/65R16	103T	SL	BSW	128420	6.5-(7.0)-8.5	28	11.3	28.0	9.4	1929	44	741
	205/45R17	88V	XL	BSW	129520	6.5-(7.0)-7.5	21	10.1	24.3	8.1	1235	50	857
	205/50R17	93V	SL	BSW	128890	5.5-(6.5)-7.5	21	10.1	25.1	8.4	1433	50	827
17	215/45R17	91V	XL	BSW	129450	(7.0) -8.0	21	10.2	24.6	8.4	1356	50	843
	215/50R17	91H	SL	BSW	128430	6.0-(7.0)-7.5	22	10.8	25.5	8.9	1356	51	814
	215/55R17	98V	SL	BSW	128940	6.0-(7.0)-7.5	25	10.2	26.3	8.9	1653	50	790
	215/60R17	96H	SL	BSW	128440	6.0-(6.5)-7.5	25	11.0	27.2	8.7	1565	51	765
	225/45R17	94V	SL	BSW	128920	7.0-(7.5)-8.5	23	10.3	25.0	8.9	1477	50	832
	225/50R17	98V	SL	BSW	128930	6.0-(7.0)-8.0	23	10.3	25.9	9.2	1653	50	802
	225/55R17	101V	XL	BSW	129120	6.0-(7.0)-8.0	26	10.3	26.8	9.2	1819	50	776
	225/60R17	99H	SL	BSW	128450	6.0-(6.5)-8.0	26	11.1	27.6	9.0	1709	51	752
	235/45R17	97V	XL	BSW	128990	7.5-(8.0)-9.0	23	10.5	25.4	9.3	1609	50	819
	235/55R17	103V	SL	BSW	128910	6.5-(7.5)-8.5	28	10.5	27.2	9.6	1929	50	765
	235/50R17	96V	SL	BSW	127530	6.5-(7.5)-8.5	28	10.5	26.3	9.6	1565	51	790
	245/45R17	99V	XL	BSW	129000	7.5-(8.0)-9.0	24	10.6	25.7	9.6	1709	50	809
	18	215/45R18	93V	XL	BSW	129580	(7.0) -8.0	22	10.2	25.6	8.4	1433	50
225/40R18		92V	SL	BSW	128880	7.5-(8.0)-9.0	23	10.3	25.1	9.1	1389	50	828
225/45R18		95V	XL	BSW	128950	7.0-(7.5)-8.5	24	10.3	25.9	8.9	1521	50	801
225/50R18		95V	SL	BSW	129180	6.0-(7.0)-8.0	25	10.3	26.9	9.2	1521	51	773
225/60R18		100H	SL	BSW	221390	6.0-(6.5)-8.0	30	11.1	28.6	9.0	1764	51	726
235/40R18		95V	XL	BSW	129510	8.0-(8.5)-9.5	23	10.5	25.4	9.5	1521	50	818
235/45R18		98V	XL	BSW	128980	7.5-(8.0)-9.0	26	10.5	26.3	9.3	1653	50	789
235/50R18		101V	XL	BSW	128960	6.5-(7.5)-8.5	27	10.5	27.3	9.6	1819	50	761
235/55R18		100V	SL	BSW	128970	6.5-(7.5)-8.5	28	10.5	28.1	9.6	1764	51	738
245/40R18		97V	XL	BSW	129460	8.0-(8.5)-9.5	24	10.6	25.7	9.8	1609	50	808
245/45R18		100V	XL	BSW	128900	7.5-(8.0)-9.0	27	10.6	26.7	9.6	1764	50	779
245/55R18		103W	SL	BSW	129360	7.0-(7.5)-8.5	29	10.0	28.6	10.0	1929	51	726
19	225/40R19	89V	SL	BSW	127520	7.5-(8.0)-9.0	25	10.3	26.1	9.1	1279	51	796
	245/40R19	98V	XL	BSW	129470	8.0-(8.5)-9.5	27	10.6	26.7	9.8	1653	50	777
	245/45R19	102V	XL	BSW	129200	7.5-(8.0)-9.0	31	10.6	27.7	9.6	1874	50	751
	245/50R19	105V	XL	BSW	129140	7.0-(7.5)-8.5	33	10.6	28.7	10.0	2039	50	724
	255/35R19	96V	XL	BSW	129600	8.5-(9.0)-10.0	28	10.7	26.0	10.2	1565	50	798
	255/40R19	100V	XL	BSW	129350	8.5-(9.0)-10	31	10.7	27.0	10.2	1764	50	768
20	255/45R19	104V	XL	BSW	129130	8.0-(8.5)-9.5	32	10.7	28.1	10.0	1984	50	740
	245/40R20	99V	XL	BSW	129590	8.0-(8.5)-9.5	28	10.6	27.7	9.8	1709	50	750
	245/45R20	103V	XL	BSW	129160	7.5-(8.0)-9.0	32	10.6	28.7	9.6	1929	50	725

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

For the latest tire information, please visit toyotires.com.

WINTER

CONFID





DEPENDENCE

OBSERVE GSI-6



STUDLESS PERFORMANCE WINTER

DRY HANDLING	4.5
WET HANDLING	4.5
RIDE COMFORT	4.0
QUIET RIDE	3.5
TREAD LIFE	4.5
SNOW TRACTION	4.5
ICE TRACTION	4.5

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
CUVs/SUVs
Direct OE Replacement

SPEED RATING

H-V

WHEEL DIAMETER

14"-15"-16"-17"-18"-19"-20"-21"-22"



OBSERVE G3-ICE



STUDDABLE PASSENGER/LIGHT TRUCK WINTER

DRY HANDLING	3.0
WET HANDLING	3.0
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	3.5
SNOW TRACTION	5.0
ICE TRACTION	5.0

VEHICLE & APPLICATION SEGMENT

Luxury Sedans
Passenger Cars
Light Trucks
Direct OE Replacement

SPEED RATING

Q-T-H

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"-21"-22"



OPEN COUNTRY WLT1



STUDLESS LIGHT TRUCK WINTER

DRY HANDLING	4.0
WET HANDLING	4.0
RIDE COMFORT	4.0
QUIET RIDE	3.5
TREAD LIFE	4.5
SNOW TRACTION	4.5
ICE TRACTION	4.5

VEHICLE & APPLICATION SEGMENT

Light Trucks

SPEED RATING

Q

WHEEL DIAMETER

16"-17"-18"-20"



WINTER:

Bring on the winter because these specialty tires are engineered to excel in snow and ice. Our advanced technologies provide drivers with improved traction and a comfortable ride in harsh conditions. And whether you choose a studless or studdable tire, Mother Nature won't keep you from where you want to go.



WINTER

W

STUDLESS PERFORMANCE WINTER TIRE

The Observe GSi-6 is a studless performance winter tire that delivers superb traction, cornering and braking performance in all winter conditions. It builds upon the excellent ice and snow traction of the Observe GSi-5 and Observe Garit KX with improved wet performance and stability. A high-grip silica compound and an aggressive tread design with advanced sipe technology provide confident handling and capability in snowy, icy, wet and dry conditions.

Observe GSi-6: ideal for passenger cars

Observe GSi-6 HP: ideal for sport coupes and sedans

Observe GSi-6 LS: ideal for CUVs and SUVs

POPULAR FITMENTS

Audi A4
BMW X5
Honda Accord and CR-V
Lexus ES
Mercedes E-Class
Porsche Macan
Toyota Camry and Rav4



Three-Peak Mountain Snowflake qualified for severe snow conditions.

HIGH-GRIP SILICA TREAD COMPOUND

- Delivers excellent traction on snow and ice, with enhanced wet grip and braking performance in low temperatures.

ABSORBENT CARBONIC POWDER

- Offers better contact and increased grip on icy roads, as carbonic powder derived from bamboo helps absorb the thin film of moisture on winter roads.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

AGGRESSIVE TREAD DESIGN

- Improves traction and braking from large paired inner tread blocks.
- Improves snow traction from serrated stability rib.

ADVANCED SIPE TECHNOLOGY

- Enhances snow and ice traction.
- Provides better ice braking performance.
- Improves cornering performance and stability.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	CONSTRUCTION	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
14	175/65R14	82H	SL	BSW	--	149330	(5.0) -6.0	17	11.0	23.0	7.0	1047	51	904
	175/70R14	84H	SL	BSW	--	149240	4.5- (5.0) -6.0	18	11.1	23.7	7.0	1102	51	877
	185/60R14	82H	SL	BSW	--	149360	5.0- (5.5) -6.5	17	11.0	22.8	7.4	1047	51	913
	185/65R14	86H	SL	BSW	--	149340	5.0- (5.5) -6.5	17	11.1	23.5	7.4	1168	51	885
	185/70R14	88H	SL	BSW	--	149290	4.5- (5.5) -6.0	18	11.2	24.3	7.4	1235	51	857
	195/70R14	91H	SL	BSW	--	149300	5.0- (6.0) -6.5	21	11.3	24.8	7.9	1356	51	838
15	175/65R15	84H	SL	BSW	--	149260	(5.0) -6.0	17	11.0	24.0	7.0	1102	51	866
	185/55R15	82H	SL	BSW	--	149400	5.0- (6.0) -6.5	18	10.8	23.0	7.6	1047	51	902
	185/60R15	84H	SL	BSW	--	149280	5.0- (5.5) -6.5	18	11.0	23.7	7.4	1102	51	875
	185/65R15	88H	SL	BSW	--	149270	5.0- (5.5) -6.5	18	11.1	24.4	7.4	1235	51	850
	195/60R15	88H	SL	BSW	--	149370	5.5- (6.0) -7.0	20	11.1	24.2	7.9	1235	51	858
	195/65R15	91H	SL	BSW	--	149200	5.5- (6.0) -7.0	19	11.2	25.0	7.9	1356	51	831
	205/65R15	94H	SL	BSW	--	149350	5.5- (6.0) -7.5	23	11.3	25.5	8.2	1477	51	816
	205/70R15	96H	SL	BSW	--	149310	5.0- (6.0) -7.0	24	11.5	26.3	8.2	1565	51	789
	215/70R15	98H	SL	BSW	--	149320	5.5- (6.5) -7.0	27	12.3	26.9	8.7	1653	51	773
	235/75R15	105H	SL	BSW	LS	174670	6.0- (6.5) -8.0	30	12.7	28.9	9.3	2039	51	720
16	185/55R16	83H	SL	BSW	--	149390	5.0- (6.0) -6.5	19	10.8	24.0	7.6	1074	51	865
	195/50R16	84H	SL	BSW	HP	142820	5.5- (6.0) -7.0	19	10.8	23.7	7.9	1102	51	877
	195/55R16	87H	SL	BSW	HP	142760	5.5- (6.0) -7.0	19	10.8	24.4	7.9	1201	51	851
	195/60R16	89H	SL	BSW	--	149410	5.5- (6.0) -7.0	21	11.1	25.2	7.9	1279	51	824
	205/55R16	94H	XL	BSW	HP	142590	5.5- (6.5) -7.5	22	10.8	24.9	8.4	1477	50	835
	205/60R16	92H	SL	BSW	--	149220	5.5- (6.0) -7.5	23	11.2	25.7	8.2	1389	51	809
	205/65R16	95H	SL	BSW	--	149210	5.5- (6.0) -7.5	24	11.3	26.5	8.2	1521	51	785
	205/70R16	97H	SL	BSW	--	149250	5.0- (6.0) -7.0	25	11.5	27.3	8.2	1609	51	760
	215/55R16	97H	XL	BSW	HP	142610	6.0- (7.0) -7.5	25	11.2	25.3	8.9	1609	50	822
	215/60R16	95H	SL	BSW	--	149230	6.0- (6.5) -7.5	25	11.3	26.1	8.7	1521	51	795
	215/65R16	98H	SL	BSW	LS	149510	6.0- (6.5) -7.5	27	12.2	27.0	8.7	1653	51	769
	215/70R16	100H	SL	BSW	LS	149430	5.5- (6.5) -7.0	30	12.3	27.9	8.7	1764	51	745
	225/60R16	98H	SL	BSW	--	149380	6.0- (6.5) -8.0	28	12.2	26.6	9.0	1653	51	781
	225/65R16	100H	SL	BSW	LS	149520	6.0- (6.5) -8.0	27	12.3	27.5	9.0	1764	51	756
	225/70R16	103H	SL	BSW	LS	174870	6.0- (6.5) -7.5	31	12.5	28.4	9.0	1929	51	731
	225/75R16	104H	SL	BSW	LS	174680	(6.0) -7.5	30	12.6	29.3	8.8	1984	51	709
	235/60R16	100H	SL	BSW	LS	174760	6.5- (7.0) -8.5	29	12.3	27.1	9.4	1764	51	767
	235/65R16	103H	SL	BSW	LS	174730	6.5- (7.0) -8.5	31	12.5	28.0	9.4	1929	51	741
	235/70R16	106H	SL	BSW	LS	174540	6.0- (7.0) -8.0	32	12.6	29.0	9.4	2094	51	717
	245/75R16	111H	SL	BSW	LS	149980	6.5- (7.0) -8.0	36	12.9	30.5	9.8	2403	51	682
265/70R16	112H	SL	BSW	LS	174700	7.0- (8.0) -9.0	39	13.0	30.6	10.7	2469	51	678	
265/75R16	116H	SL	BSW	LS	174690	7.0- (7.5) -9.0	40	13.1	31.7	10.5	2756	51	656	
17	205/45R17	88V	XL	BSW	HP	142900	6.5- (7.0) -7.5	21	10.6	24.3	8.1	1235	50	857
	205/50R17	93H	XL	BSW	HP	142660	5.5- (6.5) -7.5	23	11.0	25.1	8.4	1433	50	827
	215/45R17	91H	XL	BSW	HP	142690	(7.0) -8.0	22	11.0	24.6	8.4	1356	50	843
	215/50R17	95H	XL	BSW	HP	142670	6.0- (7.0) -7.5	24	11.1	25.5	8.9	1521	50	814
	215/55R17	98H	XL	BSW	HP	142600	6.0- (7.0) -7.5	26	11.2	26.3	8.9	1653	50	790
	215/60R17	96H	SL	BSW	LS	174890	6.0- (6.5) -7.5	28	12.2	27.2	8.7	1565	51	765
	215/65R17	99H	SL	BSW	LS	174720	6.0- (6.5) -7.5	29	12.2	28.0	8.7	1709	51	741
	225/45R17	94H	XL	BSW	HP	142640	7.0- (7.5) -8.5	23	11.1	25.0	8.9	1477	50	832
	225/50R17	94V	SL	BSW	HP	142630	6.0- (7.0) -8.0	24	11.0	25.9	9.2	1477	51	802
	225/55R17	97H	SL	BSW	HP	142620	6.0- (7.0) -8.0	28	11.3	26.8	9.2	1609	51	776
	225/60R17	99H	SL	BSW	LS	149530	6.0- (6.5) -8.0	30	12.2	27.6	9.0	1709	51	752
	225/65R17	102H	SL	BSW	LS	149460	6.0- (6.5) -8.0	30	12.3	28.5	9.0	1874	51	729
	235/45R17	97H	XL	BSW	HP	142740	7.5- (8.0) -9.0	26	11.1	25.4	9.3	1609	50	819
	235/50R17	96V	SL	BSW	HP	142880	6.5- (7.5) -8.5	28	11.1	26.3	9.6	1565	51	790
	235/55R17	99H	SL	BSW	LS	174880	6.5- (7.5) -8.5	30	12.2	27.2	9.6	1709	51	765
	235/60R17	102H	SL	BSW	LS	149550	6.5- (7.0) -8.5	31	12.3	28.1	9.4	1874	51	739

WINTER

W

Speed rated "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

OBSERVE® GSI-6

WINTER

W

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	CONSTRUCTION	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	235/65R17	104H	SL	BSW	LS	149470	6.5-(7.0)-8.5	33	12.5	29.1	9.4	1984	51	715
	235/70R17	109H	XL	BSW	LS	174840	6.0-(7.0)-8.0	35	12.6	30.0	9.4	2271	50	692
	245/45R17	99H	XL	BSW	HP	142860	7.5-(8.0)-9.0	28	11.3	25.7	9.6	1709	50	809
	245/65R17	107H	SL	BSW	LS	149970	(7.0)-8.5	34	12.6	29.5	9.8	2149	51	704
	245/70R17	110H	SL	BSW	LS	149440	6.5-(7.0)-8.0	36	12.7	30.6	9.8	2337	51	680
	255/65R17	114H	XL	BSW	LS	174850	7.0-(7.5)-9.0	36	12.7	30.1	10.2	2601	50	691
	255/70R17	112H	SL	BSW	LS	174710	6.5-(7.5)-8.5	38	12.9	31.1	10.2	2469	51	668
	265/60R17	108H	SL	BSW	LS	174860	7.5-(8.0)-9.5	36	12.7	29.5	10.7	2205	51	704
	265/65R17	112H	SL	BSW	LS	174560	7.5-(8.0)-9.5	39	12.9	30.6	10.7	2469	51	680
	265/70R17	115H	SL	BSW	LS	149450	7.0-(8.0)-9.0	41	13.0	31.7	10.7	2679	51	656
P285/70R17	117H	SL	BSW	LS	174550	7.5-(8.5)-9.5	44	13.2	32.8	11.5	2833	51	634	
18	215/45R18	89V	SL	BSW	HP	142000	(7.0)-8.0	23	10.7	25.6	8.4	1279	51	811
	215/55R18	95H	SL	BSW	LS	174790	6.0-(7.0)-7.5	27	12.1	27.3	8.9	1521	51	761
	225/40R18	92V	XL	BSW	HP	142680	7.5-(8.0)-9.0	24	10.6	25.1	9.1	1389	50	828
	225/45R18	95V	XL	BSW	HP	142650	7.0-(7.5)-8.5	25	10.8	25.9	8.9	1521	50	801
	225/50R18	99V	XL	BSW	HP	142720	6.0-(7.0)-8.0	28	10.8	26.9	9.2	1709	50	773
	225/55R18	98H	SL	BSW	LS	174580	6.0-(7.0)-8.0	30	12.2	27.8	9.2	1653	51	748
	225/60R18	100H	SL	BSW	LS	149560	6.0-(6.5)-8.0	31	12.2	28.6	9.0	1764	51	726
	235/40R18	95V	XL	BSW	HP	142810	8.0-(8.5)-9.5	26	10.8	25.4	9.5	1521	50	818
	235/45R18	98V	XL	BSW	HP	142750	7.5-(8.0)-9.0	28	10.8	26.3	9.3	1653	50	789
	235/50R18	97H	SL	BSW	LS	149940	6.5-(7.5)-8.5	29	12.2	27.3	9.6	1609	51	761
	235/55R18	100H	SL	BSW	LS	149880	6.5-(7.5)-8.5	31	12.2	28.1	9.6	1764	51	738
	235/60R18	107H	XL	BSW	LS	149570	6.5-(7.0)-8.5	33	12.3	29.1	9.4	2149	50	714
	235/65R18	106H	SL	BSW	LS	149480	6.5-(7.0)-8.5	34	12.5	30.0	9.4	2094	51	692
	245/40R18	97V	XL	BSW	HP	142700	8.0-(8.5)-9.5	27	10.8	25.7	9.8	1609	50	808
	245/45R18	100V	XL	BSW	HP	142710	7.5-(8.0)-9.0	28	11.0	26.7	9.6	1764	50	779
	245/50R18	104V	XL	BSW	HP	142780	7.0-(7.5)-8.5	31	11.2	27.7	10.0	1984	50	751
	245/55R18	103V	SL	BSW	HP	142730	7.0-(7.5)-8.5	32	11.2	28.6	10.0	1929	51	726
	245/60R18	105H	SL	BSW	LS	149540	(7.0)-8.5	34	12.5	29.6	9.8	2039	51	703
	255/35R18	94V	XL	BSW	HP	143160	8.5-(9.0)-10.0	27	11.0	25.0	10.2	1477	50	831
	255/40R18	99V	XL	BSW	HP	142890	8.5-(9.0)-10.0	28	11.1	26.0	10.2	1709	50	798
	255/55R18	109H	XL	BSW	LS	174590	7.0-(8.0)-9.0	34	12.5	29.0	10.4	2271	50	716
	255/60R18	112H	XL	BSW	LS	174740	7.0-(7.5)-9.0	36	12.6	30.0	10.2	2469	50	692
	255/65R18	111H	SL	BSW	LS	174570	7.0-(7.5)-9.0	38	12.7	31.1	10.2	2403	51	669
	255/70R18	113H	SL	BSW	LS	149420	6.5-(7.5)-8.5	40	12.9	32.1	10.2	2535	51	647
	265/60R18	110H	SL	BSW	LS	149590	7.5-(8.0)-9.5	38	12.7	30.5	10.7	2337	51	681
265/65R18	114H	SL	BSW	LS	149490	7.5-(8.0)-9.5	40	12.9	31.5	10.7	2601	51	659	
265/70R18	116H	SL	BSW	LS	149990	7.0-(8.0)-9.0	43	13.0	32.6	10.7	2756	51	636	
275/65R18	116H	SL	BSW	LS	149500	7.5-(8.0)-9.5	43	13.0	32.1	11.0	2756	51	647	
19	225/40R19	93V	XL	BSW	HP	142830	7.5-(8.0)-9.0	25	10.7	26.1	9.1	1433	50	796
	225/55R19	99H	SL	BSW	LS	149890	6.0-(7.0)-8.0	30	12.2	28.8	9.2	1709	51	722
	235/40R19	96V	XL	BSW	HP	142850	8.0-(8.5)-9.5	27	10.8	26.4	9.5	1565	50	786
	235/45R19	95V	SL	BSW	HP	142840	7.5-(8.0)-9.0	29	11.0	27.4	9.3	1521	51	759
	235/50R19	103H	XL	BSW	LS	174800	6.5-(7.5)-8.5	30	12.2	28.3	9.6	1929	50	734
	235/55R19	101H	SL	BSW	LS	149910	6.5-(7.5)-8.5	31	12.2	29.2	9.6	1819	51	712
	245/40R19	98V	XL	BSW	HP	142790	8.0-(8.5)-9.5	27	11.0	26.7	9.8	1653	50	777
	245/45R19	102V	XL	BSW	HP	142770	7.5-(8.0)-9.0	29	11.1	27.7	9.6	1874	50	751
	245/55R19	103H	SL	BSW	LS	149900	7.0-(7.5)-8.5	34	12.3	29.6	10.0	1929	51	701
	255/35R19	96V	XL	BSW	HP	142800	8.5-(9.0)-10.0	28	11.0	26.0	10.2	1565	50	798
	255/40R19	100V	XL	BSW	HP	142870	8.5-(9.0)-10.0	30	11.1	27.0	10.2	1764	50	768
	255/50R19	107H	XL	BSW	LS	174600	7.0-(8.0)-9.0	35	12.3	29.1	10.4	2149	50	714

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	CONSTRUCTION	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
19	255/55R19	111H	XL	BSW	LS	174770	7.0-(8.0)-9.0	36	12.5	30.0	10.4	2403	50	692
	255/60R19	113H	XL	BSW	LS	174750	7.0-(7.5)-9.0	38	12.6	31.1	10.2	2535	50	669
	265/50R19	110H	XL	BSW	LS	174830	7.5-(8.5)-9.5	37	12.5	29.5	10.9	2337	50	704
	265/55R19	113V	XL	BSW	LS	174640	7.5-(8.5)-9.5	39	12.3	30.5	10.9	2535	50	681
20	235/55R20	102H	SL	BSW	LS	149920	6.5-(7.5)-8.5	34	12.2	30.2	9.6	1874	51	689
	245/50R20	102H	SL	BSW	LS	149950	7.0-(7.5)-8.5	35	12.2	29.7	10.0	1874	51	700
	255/45R20	105H	XL	BSW	LS	174810	8.0-(8.5)-9.5	32	12.2	29.1	10.0	2039	50	715
	255/50R20	109H	XL	BSW	LS	174610	7.0-(8.0)-9.0	36	12.3	30.1	10.4	2271	50	691
	255/55R20	110H	XL	BSW	LS	174780	7.0-(8.0)-9.0	37	12.5	31.0	10.4	2337	50	670
	265/45R20	108V	XL	BSW	LS	174650	8.5-(9.0)-10.0	35	12.2	29.4	10.5	2205	50	707
	265/50R20	111H	XL	BSW	LS	149960	7.5-(8.5)-9.5	38	12.5	30.5	10.9	2403	50	682
	275/40R20	106H	XL	BSW	LS	174820	9.0-(9.5)-11.0	33	12.2	28.7	10.9	2337	50	725
	275/45R20	110V	XL	BSW	LS	174660	8.5-(9.0)-10.5	36	12.2	29.8	10.7	2337	50	698
	275/55R20	113H	SL	BSW	LS	149930	7.5-(8.5)-9.5	41	12.7	31.9	11.2	2535	51	651
	275/60R20	115H	SL	BSW	LS	149850	7.5-(8.0)-9.5	43	12.9	33.0	11.0	2679	51	630
	315/35R20	110V	XL	BSW	LS	174630	10.5-(11.0)-12.5	38	11.7	28.7	12.6	2337	50	725
21	295/35R21	107V	XL	BSW	--	174930	10.0-(10.5)-11.5	37	11.5	29.1	11.9	2149	50	714
22	285/45R22	114H	XL	BSW	LS	174620	9.0-(9.5)-10.5	40	12.6	32.1	11.2	2601	50	647

WINTER

W

OBSEVE GSI-6

Passenger Cars

OBSEVE GSI-6 LS

CUVs and SUVs

OBSEVE GSI-6 HP

High Performance Cars



Speed rated "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

STUDDABLE PASSENGER/CUV/SUV/LIGHT TRUCK WINTER TIRE

Designed for tough winter conditions, the Observe G3-Ice combines excellent performance with driving comfort. For areas that experience severe winters, this tire can be studded for added traction on ice and compacted snow. Optimized stud hole placement delivers better traction and a quieter ride with fewer studs.

WINTER

W

POPULAR FITMENTS

Chevrolet Silverado
Ford Fusion
Honda Accord
Subaru Outback
Toyota 4Runner
Volkswagen Passat



Three-Peak Mountain Snowflake qualified for severe snow conditions.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

HIGH-SILICA WINTER COMPOUND

- Ensures tread blocks remain flexible in lower temperatures.
- Enhances wet braking and handling even in lower temperatures.

OPTIMIZED STUD HOLE PLACEMENT

- Improves road contact and traction with fewer studs.
- Reduces noise, resulting in a quieter ride.
- Able to accept TSMI #11 studs to aid in ice traction.

LARGE U-SHAPED TREAD BLOCKS WITH SAW-TOOTH EDGE

- Grab onto the snow for better traction and braking.

GEAR EDGE DESIGN AT STUD HOLE

- Provides better traction during cornering and braking.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE	
13	175/70R13	82T	SL	BSW	138020	4.5-(5.0)-6.0	17	11.3	22.7	7.0	1047	44	916	
	175/65R14	82T	SL	BSW	138050	(5.0)-6.0	17	11.3	23.0	7.0	1047	44	903	
	175/70R14	84T	SL	BSW	138030	4.5-(5.0)-6.0	18	11.3	23.7	7.0	1102	44	876	
	185/60R14	82T	SL	BSW	138080	5.0-(5.5)-6.5	18	11.3	22.8	7.4	1047	44	913	
	185/65R14	86T	SL	BSW	138060	5.0-(5.5)-6.5	18	11.3	23.5	7.4	1168	44	885	
	185/70R14	88T	SL	BSW	138040	4.5-(5.5)-6.0	20	11.3	24.3	7.4	1235	44	857	
14	175/65R15	84T	SL	BSW	139130	(5.0)-6.0	18	11.3	24.0	7.0	1102	44	866	
	185/55R15	82T	SL	BSW	138200	5.0-(6.0)-6.5	18	11.3	23.0	7.6	1047	44	902	
	185/60R15	84T	SL	BSW	138170	5.0-(5.5)-6.5	19	11.3	23.7	7.4	1102	44	875	
	185/65R15	88T	SL	BSW	138070	5.0-(5.5)-6.5	20	11.3	24.4	7.4	1235	44	850	
	195/50R15	82T	SL	BSW	138250	5.5-(6.0)-7.0	19	11.3	22.7	7.9	1047	44	914	
	195/55R15	85T	SL	BSW	138210	5.5-(6.0)-7.0	20	11.3	23.4	7.9	1135	44	887	
	195/60R15	88T	SL	BSW	138090	5.5-(6.0)-7.0	20	11.3	24.2	7.9	1235	44	858	
	195/65R15	91T	SL	BSW	138010	5.5-(6.0)-7.0	21	11.3	25.0	7.9	1356	44	831	
	205/65R15	94T	SL	BSW	138160	5.5-(6.0)-7.5	23	11.3	25.5	8.2	1477	44	816	
	205/70R15	100T	XL	BSW	138000	5.0-(6.0)-7.0	27	12.5	26.3	8.2	1764	50	789	
	215/70R15	98T	SL	BSW	110310	5.5-(6.5)-7.0	27	12.5	26.9	8.7	1653	44	773	
	265/70R15	112T	SL	BSW	110350	7.0-(8.0)-9.0	39	13.7	29.6	10.7	2469	44	701	
	15	185/50R16	81T	SL	BSW	138260	5.0-(6.0)-6.5	19	11.3	23.3	7.6	1019	44	891
		185/55R16	87T	XL	BSW	138220	5.0-(6.0)-6.5	20	11.3	24.0	7.6	1201	50	865
195/45R16		84T	XL	BSW	138280	6.0-(6.5)-7.5	19	11.3	22.9	7.7	1102	50	907	
195/55R16		87T	SL	BSW	139140	5.5-(6.0)-7.0	21	11.3	24.4	7.9	1201	44	851	
205/55R16		91T	SL	BSW	138110	5.5-(6.5)-7.5	23	11.3	24.9	8.4	1356	44	835	
205/60R16		92T	SL	BSW	138100	5.5-(6.0)-7.5	23	11.3	25.7	8.2	1389	44	809	
215/55R16		93T	SL	BSW	138230	6.0-(7.0)-7.5	25	11.3	25.3	8.9	1433	44	822	
215/60R16		95T	SL	BSW	138180	6.0-(6.5)-7.5	25	11.3	26.1	8.7	1521	44	795	
215/65R16		98T	SL	BSW	139010	6.0-(6.5)-7.5	27	12.5	27.0	8.7	1653	44	769	
215/70R16		100T	SL	BSW	138370	5.5-(6.5)-7.0	28	12.0	27.9	8.7	1764	44	745	
225/55R16		95T	SL	BSW	139150	6.0-(7.0)-8.0	25	11.3	25.7	9.2	1521	44	807	
225/70R16		107T	XL	BSW	139000	6.0-(6.5)-7.5	32	12.5	28.4	9.0	2149	50	731	
225/75R16		104H	SL	BSW	110400	(6.0)-7.5	32	12.5	29.3	8.8	1984	51	709	
235/70R16		106T	SL	BSW	139330	6.0-(7.0)-8.0	33	13.1	29.0	9.4	2094	44	717	
235/75R16		108T	SL	BSW	110410	6.0-(6.5)-8.0	34	13.1	29.8	9.3	2205	44	696	
245/70R16		111T	XL	BSW	138380	6.5-(7.0)-8.0	36	13.1	29.5	9.8	2403	50	704	
LT245/75R16		120/116Q	E	BSW	138480	6.0-(7.0)-8.0	44	15.0	30.5	9.8	3042	80	682	
255/65R16		109T	SL	BSW	110290	7.0-(7.5)-9.0	36	13.1	29.1	10.2	2271	44	715	
255/70R16		111T	SL	BSW	110390	6.5-(7.5)-8.5	38	13.1	30.1	10.2	2403	44	691	
265/70R16		112T	SL	BSW	138530	7.0-(8.0)-9.0	41	13.7	30.6	10.7	2469	44	678	
275/70R16	114T	SL	BSW	110380	7.0-(8.0)-9.0	43	13.7	31.2	11.0	2601	44	666		
16	205/50R17	89T	SL	BSW	138270	5.5-(6.5)-7.5	23	11.3	25.1	8.4	1279	44	827	
	215/40R17	87T	XL	BSW	139250	7.0-(7.5)-8.5	21	11.3	23.8	8.6	1201	50	874	
	215/45R17	87T	SL	BSW	139190	(7.0)-8.0	22	11.3	24.6	8.4	1201	44	843	
	215/50R17	91T	SL	BSW	138130	6.0-(7.0)-7.5	25	11.3	25.5	8.9	1356	44	814	
	215/55R17	98T	XL	BSW	138120	6.0-(7.0)-7.5	26	11.3	26.3	8.9	1653	50	790	
	215/60R17	100T	XL	BSW	139030	6.0-(6.5)-7.5	28	12.5	27.2	8.7	1764	50	765	
	225/45R17	91T	SL	BSW	139200	7.0-(7.5)-8.5	24	11.3	25.0	8.9	1356	44	832	
	225/50R17	94T	SL	BSW	138140	6.0-(7.0)-8.0	26	11.3	25.9	9.2	1477	44	802	
	225/55R17	101T	XL	BSW	138240	6.0-(7.0)-8.0	28	11.3	26.8	9.2	1819	50	776	
	225/60R17	103T	XL	BSW	139050	6.0-(6.5)-8.0	30	12.5	27.6	9.0	1929	50	752	

WINTER

W

OBSERVE® G3-ICE

WINTER

W

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	225/65R17	106T	XL	BSW	139320	6.0-(6.5)-8.0	31	11.3	28.5	9.0	2094	50	729	
	235/45R17	94T	SL	BSW	138150	7.5-(8.0)-9.0	26	11.3	25.4	9.3	1477	44	819	
	235/55R17	103T	XL	BSW	110160	6.5-(7.5)-8.5	30	12.0	27.2	9.6	1929	50	765	
	235/60R17	106T	XL	BSW	139360	6.5-(7.0)-8.5	33	13.1	28.1	9.4	2094	50	739	
	235/65R17	108T	XL	BSW	139020	6.5-(7.0)-8.5	34	13.1	29.1	9.4	2205	50	715	
	245/40R17	95T	XL	BSW	139260	8.0-(8.5)-9.5	25	11.3	24.7	9.8	1521	50	840	
	245/45R17	99T	XL	BSW	138290	7.5-(8.0)-9.0	25	11.3	25.7	9.6	1709	50	809	
	245/65R17	107T	SL	BSW	139350	(7.0) -8.5	34	13.1	29.5	9.8	2149	44	704	
	245/70R17	110T	SL	BSW	110370	6.5-(7.0)-8.0	37	13.1	30.6	9.8	2337	44	680	
	255/65R17	114T	XL	BSW	138390	7.0-(7.5)-9.0	37	13.1	30.1	10.2	2601	50	691	
	265/65R17	116T	XL	BSW	138400	7.5-(8.0)-9.5	42	13.7	30.6	10.7	2756	50	680	
275/65R17	119T	XL	BSW	110320	7.5-(8.0)-9.5	44	13.7	31.1	11.0	2998	50	668		
18	225/40R18	92T	XL	BSW	138330	7.5-(8.0)-9.0	25	11.3	25.1	9.1	1389	50	828	
	225/45R18	95T	XL	BSW	139210	7.0-(7.5)-8.5	25	11.3	25.9	8.9	1521	50	801	
	225/55R18	102T	XL	BSW	138420	6.0-(7.0)-8.0	29	12.0	27.8	9.2	1874	50	748	
	225/60R18	100T	SL	BSW	139060	6.0-(6.5)-8.0	30	11.3	28.6	9.0	1764	44	726	
	225/60R18	104T	XL	BSW	138190	6.0-(6.5)-8.0	30	11.3	28.6	9.0	1984	50	726	
	235/40R18	95T	XL	BSW	138340	8.0-(8.5)-9.5	25	11.3	25.4	9.5	1521	50	818	
	235/45R18	98T	XL	BSW	138300	7.5-(8.0)-9.0	27	11.3	26.3	9.3	1653	50	789	
	235/50R18	101T	XL	BSW	110180	6.5-(7.5)-8.5	30	12.0	27.3	9.6	1819	50	761	
	235/55R18	104T	XL	BSW	138490	6.5-(7.5)-8.5	32	12.0	28.1	9.6	1984	50	738	
	235/60R18	107T	XL	BSW	139070	6.5-(7.0)-8.5	34	13.1	29.1	9.4	2149	50	714	
	235/65R18	110T	XL	BSW	110210	6.5-(7.0)-8.5	35	13.1	30.0	9.4	2337	50	692	
	245/40R18	97T	XL	BSW	138350	8.0-(8.5)-9.5	26	11.3	25.7	9.8	1609	50	808	
	245/45R18	100T	XL	BSW	138310	7.5-(8.0)-9.0	29	11.3	26.7	9.6	1764	50	779	
	245/50R18	100T	SL	BSW	139180	7.0-(7.5)-8.5	31	11.3	27.7	10.0	1764	44	751	
	245/60R18	105T	SL	BSW	110220	(7.0) -8.5	34	13.1	29.6	9.8	2039	44	703	
	255/45R18	103T	XL	BSW	139220	8.0-(8.5)-9.5	30	11.3	27.0	10.0	1929	50	768	
	255/55R18	109T	XL	BSW	139090	7.0-(8.0)-9.0	34	12.0	29.0	10.4	2271	50	716	
	255/60R18	112T	XL	BSW	110140	7.0-(7.5)-9.0	37	13.1	30.0	10.2	2469	50	692	
	265/60R18	114T	XL	BSW	138410	7.5-(8.0)-9.5	42	13.7	30.5	10.7	2601	50	681	
	275/60R18	117T	XL	BSW	110360	7.5-(8.0)-9.5	44	13.7	31.0	11.0	2833	50	670	
285/60R18	120T	XL	BSW	139080	8.0-(8.5)-10.0	47	13.7	31.5	11.5	3086	50	660		
19	235/50R19	103T	XL	BSW	138500	6.5-(7.5)-8.5	31	12.0	28.3	9.6	1929	50	734	
	235/55R19	105H	XL	BSW	138430	6.5-(7.5)-8.5	32	12.0	29.2	9.6	2039	50	712	
	245/45R19	102T	XL	BSW	138320	7.5-(8.0)-9.0	30	11.3	27.7	9.6	1874	50	751	
	245/55R19	103T	SL	BSW	110300	7.0-(7.5)-8.5	34	12.0	29.6	10.0	1929	44	701	
	255/40R19	100T	XL	BSW	139270	8.5-(9.0)-10.0	30	11.3	27.0	10.2	1764	50	768	
	255/45R19	104T	XL	BSW	139230	8.0-(8.5)-9.5	32	11.3	28.1	10.0	1984	50	740	
	255/50R19	107T	XL	BSW	138510	7.0-(8.0)-9.0	35	12.0	29.1	10.4	2149	50	714	
	255/55R19	111T	XL	BSW	110340	7.0-(8.0)-9.0	36	12.0	30.0	10.4	2403	50	692	
	265/50R19	110T	XL	BSW	110190	7.5-(8.5)-9.5	37	12.0	29.5	10.9	2337	50	704	
	275/40R19	105T	XL	BSW	139280	9.0-(9.5)-11.0	33	11.3	27.7	10.9	2039	50	751	
	275/55R19	111T	SL	BSW	110330	7.5-(8.5)-9.5	40	12.0	30.9	11.2	2403	44	672	
	285/40R19	103T	SL	BSW	138360	9.5-(10.0)-11.0	34	11.3	28.0	11.4	1929	44	742	
	285/45R19	111T	XL	BSW	131190	9.0-(9.5)-10.5	35	12.0	29.1	11.2	2403	50	714	
20	235/45R20	100T	XL	BSW	138460	7.5-(8.0)-9.0	30	12.0	28.3	9.3	1764	50	733	
	235/55R20	105T	XL	BSW	139170	6.5-(7.5)-8.5	34	11.3	30.2	9.6	2039	50	689	
	245/40R20	99T	XL	BSW	138470	8.0-(8.5)-9.5	32	12.0	27.7	9.8	1709	50	749	

Speed rated "T" = 118mph, "H" = 130mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall.
 Bold designates measuring rim width. Observe G3-Ice shown with winter studs. Pinned to accept TSMI #11 stud. *Inflated dimensions.

SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
20	245/45R20	99T	SL	BSW	110130	7.5-(8.0)-9.0	31	12.0	28.7	9.6	1709	44	725
	255/35R20	97T	XL	BSW	139300	8.5-(9.0)-10.0	28	11.3	27.0	10.2	1609	50	769
	255/45R20	105T	XL	BSW	131160	8.0-(8.5)-9.5	34	12.0	29.1	10.0	2039	50	715
	255/50R20	109T	XL	BSW	110230	7.0-(8.0)-9.0	37	12.0	30.1	10.4	2271	50	691
	255/55R20	110T	XL	BSW	110120	7.0-(8.0)-9.0	38	12.0	31.0	10.4	2337	50	670
	265/40R20	104T	XL	BSW	139290	9.0-(9.5)-10.5	33	11.3	28.3	10.7	1984	50	733
	265/50R20	111T	XL	BSW	110240	7.5-(8.5)-9.5	39	12.0	30.5	10.9	2403	50	682
	275/35R20	102T	XL	BSW	139310	9.0-(9.5)-11.0	32	11.3	27.6	10.9	1874	50	754
	275/40R20	106T	XL	BSW	131200	9.0-(9.5)-11.0	34	12.0	28.7	10.9	2094	50	725
	275/45R20	106T	SL	BSW	131180	8.5-(9.0)-10.5	36	12.0	29.8	10.7	2094	44	698
	275/50R20	109T	SL	BSW	138440	7.5-(8.5)-9.5	41	12.0	30.9	11.2	2271	44	673
	275/55R20	117T	XL	BSW	110170	7.5-(8.5)-9.5	42	12.0	31.9	11.2	2833	50	651
	275/60R20	115T	SL	BSW	110150	7.5-(8.0)-9.5	47	13.7	33.0	11.0	2679	44	630
	285/50R20	116T	XL	BSW	138520	8.0-(9.0)-10.0	42	12.0	31.3	11.7	2756	50	665
	315/35R20	106T	SL	BSW	131230	10.0-(11.0)-12.5	38	12.0	28.7	12.6	2094	44	725
21	265/45R21	104T	SL	BSW	131170	8.5-(9.0)-10.0	36	12.0	30.4	10.5	1984	44	684
	285/35R21	105T	XL	BSW	131440	9.5-(10.0)-11.0	36	12.0	28.9	11.4	2039	50	720
	295/35R21	107T	XL	BSW	131220	10.0-(10.5)-11.5	38	12.0	29.1	11.9	2149	50	714
	295/40R21	111T	XL	BSW	131210	10.0-(10.5)-11.5	40	12.0	30.3	11.9	2403	50	686
	325/30R21	108T	XL	BSW	132260	11.0-(11.5)-12.0	41	12.0	28.7	13.0	2205	50	724
22	275/40R22	107T	XL	BSW	131430	9.0-(9.5)-11.0	39	12.0	30.7	10.9	2149	50	677
	275/50R22	111T	SL	BSW	138450	7.5-(8.5)-9.5	44	12.0	32.9	11.2	2403	44	632
	285/45R22	114T	XL	BSW	139100	9.0-(9.5)-10.5	40	12.0	32.1	11.2	2601	50	647

WINTER

W



For the latest tire information, please visit toyotires.com.

TOYO TIRES®

STUDLESS LIGHT TRUCK WINTER TIRE

Tough winter jobs just got a little bit easier with the Open Country WLT1. This winter tire provides excellent winter driving capabilities for a variety of heavy-duty light trucks, including pickups, vans and SUVs. Designed to handle the increased load-carrying capacity of these vehicles, it delivers confident ice and snow performance with long tread life.

WINTER

W

POPULAR FITMENTS

Chevrolet Silverado 2500/3500 HD
Ford F-Series
GMC Sierra 2500/3500 HD
Mercedes-Benz Sprinter
Ram 2500/3500



Three-Peak Mountain Snowflake qualified for severe snow conditions.

WIDER TREAD FOOTPRINT

- Improves stability and handling.

WIDER DEEP GROOVES

- Increase snow traction.
- Prevent snow buildup.

INCREASED SIPE DENSITY

- Improves water evacuation and ice traction.
- Improves cornering performance on ice.

STRAIGHT SIPE AND DIMPLE DESIGN ON OUTSIDE TREAD

- Help resist wandering.
- Improve traction in deep snow.

HEAVY-DUTY CONSTRUCTION WITH A STIFF RIGID CASING

- Meets the load-carrying, handling and braking needs of light trucks, vans and SUVs.
- Improves handling performance.



SPECIFICATIONS

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX. LOAD (LBS) SINGLE	MAX. LOAD (LBS) DUAL	MAX. PRESSURE (PSI)	REVS PER MILE
16	LT215/85R16	115/112Q	E	BSW	173100	5.5- (6.0) -7.0	39	15.9	30.4	8.9	2680	2470	80	683
	LT225/75R16	115/112Q	E	BSW	173300	(6.0) -7.0	39	16.1	29.4	8.9	2680	2470	80	707
	LT235/85R16	120/116Q	E	BSW	173200	6.0- (6.5) -7.5	45	16.1	31.9	9.3	3042	2778	80	652
	LT245/75R16	120/116Q	E	BSW	173400	6.5- (7.0) -8.0	46	16.3	30.6	9.9	3042	2778	80	680
	LT265/75R16	123/120Q	E	BSW	173500	7.0- (7.5) -8.0	48	16.5	31.7	10.7	3415	3085	80	655
	LT285/75R16	126/123Q	E	BSW	173600	7.5- (8.0) -9.0	52	16.5	32.8	11.4	3750	3415	80	633
17	LT235/80R17	120/117Q	E	BSW	173110	6.0- (6.5) -7.5	45	16.1	31.9	9.4	3085	2835	80	651
	LT245/70R17	119/116Q	E	BSW	173700	6.5- (7.0) -8.0	43	16.3	30.6	9.7	3000	2755	80	678
	LT245/75R17	121/118Q	E	BSW	174100	6.5- (7.0) -7.5	45	16.3	31.6	9.8	3195	2910	80	658
	LT265/70R17	121/118Q	E	BSW	173800	7.0- (8.0) -8.5	49	16.5	31.8	10.7	3195	2910	80	654
	LT285/70R17	121/118Q	E	BSW	173900	7.5- (8.5) -9.0	52	16.5	32.8	11.5	3195	2910	80	633
18	LT265/70R18	124/121Q	E	BSW	174510	7.0- (8.0) -9.0	44	16.5	32.6	10.7	3525	3195	80	636
	LT275/65R18	123/120Q	E	BSW	173120	7.5- (8.0) -9.0	49	16.5	32.3	10.9	3415	3085	80	643
	LT275/70R18	125/122Q	E	BSW	174400	7.0- (8.0) -8.5	52	16.5	33.3	10.9	3640	3305	80	624
20	LT265/60R20	121/118Q	E	BSW	174520	7.0- (8.0) -9.5	51	16.5	32.5	10.7	3195	2910	80	639
	LT275/65R20	126/123Q	E	BSW	174500	7.5- (8.0) -9.5	53	16.5	34.3	10.5	3750	3415	80	605

WINTER

W



Speed rated "Q" = 99mph. "E" = 10-ply rating. "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

For the latest tire information, please visit toyotires.com.

TOYO TIRES

ORIGINAL EQUIPMENT

ORIGINAL EQUIPMENT

MODEL	MODEL YEAR	TIRE SIZE	LOAD/SPEED	TIRE NAME	PRODUCT CODE	WEIGHT (LBS.)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS.)	MAX PRESSURE (PSI)	UTQG	ALL-SEASON M/S	REPLACEMENT
AUDI														
Q8	2019-21	275/50R20 XL	113H	TOYO CELSIUS CUV A	238350	40	10.5	31.1	11.3	2535	50	300 A A	Y	OPEN COUNTRY H/T II, PROXES ST III
Q7	2016-18	255/60R18	108Y	PROXES T1 SPORT SUV A	103560	35	10.3	30.2	10.6	2205	51	240 AA A	N	OPEN COUNTRY Q/T, PROXES ST III
DODGE														
Journey	2014-20	P225/55R19	99V	TOYO A23	140540	29	9.8	28.9	9.0	1709	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
RAM														
Ram 1500 Rebel	2016-18	LT285/70R17 E/10	121/118S	OPEN COUNTRY A/T II	352430	53	16.3	32.8	11.5	3195	80	N/A	Y	OPEN COUNTRY A/T III, OPEN COUNTRY A/T II
FORD														
Expedition	2018-22	275/55R20	113H	OPEN COUNTRY H/T D	364000	41	11.5	31.9	11.1	2535	51	300 A A	Y	OPEN COUNTRY H/T II, OPEN COUNTRY A/T III
F-250 King Ranch	2014-18	LT275/65R20 E/10	126/123S	OPEN COUNTRY A/T II	352580	57	16.0	34.1	11.0	3750	80	N/A	Y	OPEN COUNTRY A/T III, OPEN COUNTRY H/T II
INFINITI														
QX60	2016-22	235/65R18	106T	OPEN COUNTRY A25 A	301790	31	9.7	30.0	9.4	2094	44	300 A A	Y	OPEN COUNTRY H/T II, OPEN COUNTRY Q/T
LINCOLN														
Navigator	2018-22	275/55R20	113H	OPEN COUNTRY H/T D	364000	41	11.5	31.9	11.1	2535	51	300 A A	Y	OPEN COUNTRY A/T III, PROXES ST III
MAZDA														
Mazda 3	2019-22	205/60R16	92H	PROXES A37	238330	19	10.0	25.7	8.2	1389	51	300 B A	Y	EXTENSA A/S II, CELSIUS
Mazda 3	2020	215/45R18	89V	PROXES A40	238380	21	9.7	25.6	8.4	1279	51	300 B A	Y	PROXES SPORT A/S, CELSIUS
Mazda 3	2021-22	215/45R18	89V	PROXES A40 A	230480	22	9.7	25.6	8.4	1279	51	300 B A	Y	PROXES SPORT A/S, CELSIUS
Mazda CX-5	2017-22	P225/55R19	99V	TOYO A36	140630	29	10.2	28.8	9.0	1709	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
Mazda CX-5	2013-17	P225/55R19	99V	TOYO A23	140540	29	9.8	28.9	9.0	1709	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
MINI														
Outlander/Outlander Sport	2013-21	P225/55R18	97H	TOYO A24A	140550	26	10.2	27.8	9.1	1609	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
Outlander	2022	P235/60R18	102H	TOYO A45	148570	29	9.2	29.1	9.4	1874	51	300 A A	H	OPEN COUNTRY Q/T, OPEN COUNTRY H/T II

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph, "Y" = 186mph, "XL" = Extra Load. Bold designates measuring rim width. *inflated dimensions.

MODEL	MODEL YEAR	TIRE SIZE	LOAD/SPEED	TIRE NAME	PRODUCT CODE	WEIGHT (LBS.)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS.)	MAX PRESSURE (PSI)	UTQG	ALL-SEASON M&S	REPLACEMENT
NISSAN														
Murano	2016-20	235/65R18	106T	OPEN COUNTRY A25 A	301790	31	9.7	30.0	9.4	2094	44	300 A A	Y	OPEN COUNTRY H/T II, OPEN COUNTRY Q/T
Pathfinder	2022	255/60R18	108H	OPEN COUNTRY A46	302210	31	8.7	30.0	10.2	2205	51	300 A A	Y	OPEN COUNTRY Q/T
Titan	2017-22	P265/70R18	114S	OPEN COUNTRY A26	301870	40	11.0	32.6	10.7	2601	44	400 A B	Y	OPEN COUNTRY A/T III, OPEN COUNTRY H/T II
TOYOTA														
Camry	2017-20	215/55R17	94V	PROXES A35	238060	23	9.8	26.3	8.7	1477	51	300 A A	Y	PROXES SPORT A/S, CELSIUS
Corolla	2014-20	P205/55R16	89H	PROXES 4 PLUS A	177970	20	10.2	24.8	8.2	1279	51	300 A A	Y	EXTENSA A/S II, CELSIUS
Corolla iM	2016-19	P225/45R17	90V	PROXES 4 PLUS B	177980	21	9.3	25.0	8.8	1323	51	300 A A	Y	PROXES SPORT A/S EXTENSA HP II
Highlander	2018-22	235/65R18	106V	OPEN COUNTRY A43	302160	29	9.6	30.0	9.5	2094	51	300 A A	Y	OPEN COUNTRY Q/T
Highlander	2017-20	245/55R19	103T	OPEN COUNTRY A20 B	301980	32	10.5	29.6	10.0	1929	44	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
Prius	2019-22	195/65R15	91S	NANOENERGY A41	107700	17	9.3	25.0	7.9	1356	44	300 B B	Y	EXTENSA A/S II, CELSIUS
Prius	2016-20	P195/65R15	89S	NANOENERGY A29	103890	18	9.7	25.0	8.1	1279	44	300 A B	Y	EXTENSA A/S II, CELSIUS
Prius V	2013-19	P215/50R17	90W	PROXES A20	238930	23	9.7	25.5	8.7	1323	51	300 A A	Y	PROXES SPORT A/S, EXTENSA HP II
RAV4	2019-22	225/65R17	102H	OPEN COUNTRY A38	302060	26	9.2	28.5	9.0	1874	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
RAV4	2019-22	235/55R19	101V	OPEN COUNTRY A39	302100	29	9.8	29.2	9.6	1819	51	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
RAV4	2016-19	235/55R18	100H	OPEN COUNTRY A20	301770	28	10.3	28.1	9.6	1764	44	300 A A	Y	OPEN COUNTRY Q/T, CELSIUS CUV
Tacoma	2018-22	P265/65R17	110S	OPEN COUNTRY A30	310420	36	11.1	30.6	10.7	2337	44	300 A B	Y	OPEN COUNTRY A/T III, OPEN COUNTRY H/T II
Tacoma	2016-22	P245/75R16	109S	OPEN COUNTRY A31	310300	32	11.6	30.5	9.8	2271	44	300 A B	Y	OPEN COUNTRY A/T III, OPEN COUNTRY H/T II
Yaris iA	2017-20	P185/60R16	86H	PROXES A27	201280	17	9.4	24.7	7.4	1168	51	240 A A	Y	EXTENSA A/S II, CELSIUS

ORIGINAL EQUIPMENT

Visit toyotires.com for images of Original Equipment tires.

For the latest tire information,
please visit toyotires.com.

TOYO TIRES®

SPEED RATING & LOAD INDEX

The load index and speed rating correspond to the maximum load-carrying capacity of the tire and its maximum speed capability. Replacement tires should have a load-carrying capacity and speed rating that meets or exceeds that of the original equipment (O.E.) tires.

LOAD INDEX

The load index is a numerical code associated with the maximum load a tire can carry at the speed indicated by its speed symbol under service conditions specified by the tire manufacturer. The load index may not be used independent of speed rating to determine tire acceptability for load capacity. An equal or greater load index does not always correspond to equal or greater capacity at all inflation pressure settings, particularly when comparing P-metric and metric passenger car tires. Please see the Load and Inflation Table Application Guide at toyotires.com for additional information.

EXAMPLES OF TIRE SIZE AND LOAD INDEX VALUE DIFFERENCES

TIRE SIZE	LOAD INDEX	Load Capacity (lbs.) at Various Inflation Pressures			
		26	29	32	35
Load capacity varies for different tire sizes with the same load index					
P205/65R15	92 (SL)	1213	1279	1334	1400
P225/55R15	92 (SL)	1224	1290	1345	1389
Load capacity varies for some tire sizes with different load index					
P205/55R16	89 (SL)	1091	1157	1213	1279
205/55R16	91 (SL)	1047	1135	1224	1312
205/55R16	94 (XL)	1003	1102	1179	1268

SPEED RATING

A speed rating is designated by a letter that indicates the maximum speed capability of a tire based on standardized laboratory tests under specific, controlled conditions. These ratings do not necessarily relate to actual tire performance on the road, but are instead intended to provide comparative performance measurements of tires with different ratings. Replacement tires should have a speed rating that is equal to or greater than that of the original equipment tires if the speed capability and handling characteristics of the vehicle are to be maintained.

SPEED RATING	SPEED (MPH)	SPEED RATING	SPEED (MPH)	SPEED RATING	SPEED (MPH)
P	93	T	118	W	168
Q	99	U	124	Y	186
R	106	H	130	(Y)	195
S	112	V	149	ZR*	OVER 149 MPH

*Consult tire manufacturer for top speed capability.

TIRE SAFETY

TIRE SPEED RATING

All Toyo Tires passenger, light truck and truck tires have a maximum speed rating based on size and type. Tires must never be operated in excess of their rated speed limit! Consult your tire dealer or contact Toyo Tires at (800) 442-8696 (Pacific Time) if you are not sure about the maximum speed rating of your tires.



No tire, regardless of its design or speed rating, has an unlimited capacity for speed. Exceeding the tire's speed capability could cause overheating and sudden tire failure, possibly leading to loss of vehicle control and serious personal injury or death.

SPEED-RATED TIRES

If the vehicle Tire Information Placard and/or the vehicle Owner's Manual specifies speed-rated tires, the replacement tires must have the same or higher speed rating to maintain vehicle speed capability.

- If a replacement tire has a lower speed capability than that specified by the vehicle manufacturer, the vehicle's speed must be restricted to that of the replacement tire. Vehicle handling could also be affected. Consult the vehicle Owner's Manual or tire manufacturer for recommendations.
- If tires with different speed ratings are used, it is recommended that the lower-speed-rated tires always be placed on the front axle. This is to prevent a potential oversteer condition.

FOUR-WHEEL DRIVE (4WD) AND ALL-WHEEL DRIVE (AWD) VEHICLES

If no instructions for tire mixing appear in the vehicle Owner's Manual, follow these guidelines:

- Do not mix tire sizes. All four tires must be marked with the same tire size, unless otherwise specified by the vehicle manufacturer. This also applies to winter/snow tires.
- Do not mix tread pattern types such as all-terrain and all-season.

STUDLESS WINTER/SNOW TIRES

- It is always preferable to apply winter/snow tires to all wheel positions, including dual tires, to maintain vehicle mobility and control.
- If winter/snow tires are applied to the front axle of any vehicle, winter/snow tires must also be installed on the rear axle. DO NOT apply winter/snow tires only to the front axle. This applies to all passenger and light truck vehicles, including front-wheel-drive, 4WD and AWD vehicles.
- If winter/snow tires are installed on the rear axle of any vehicle, it is recommended (but not required) that they also be installed on the front axle.



Unless winter/snow tires on the rear axle have comparable traction qualities to the tires on the front axle, the vehicle may experience adverse handling characteristics. This may result in loss of vehicle control, which can lead to serious personal injury or death.

STUDED WINTER/SNOW TIRES

- Studded winter/snow tires have higher traction qualities under most winter weather conditions.
- If studded winter/snow tires are installed on the front axle of any vehicle, studded winter/snow tires must also be installed on the rear axle. DO NOT apply studded winter/snow tires only to the front axle.
- If studded winter/snow tires are installed on the rear axle of any vehicle, it is strongly recommended that they should also be installed on the front axle. Only if studded winter/snow tires are installed on all wheel positions of a vehicle will optimum handling characteristics be achieved.

SPEED RATING & LOAD INDEX

WARNING

Installing only two studded winter/snow tires on the front axle of any vehicle (including front-wheel-drive vehicles) without studded winter/snow tires on the rear axle can cause adverse vehicle handling characteristics. This can result in a loss of vehicle control, which could cause serious personal injury or death.

WINTER (SNOW TIRES)



Winter driving presents special challenges for vehicle handling. The use of winter tires, studs and chains, while improving traction performance in snow and ice, requires additional caution and care with regard to braking, cornering, and speed. It is important to drive with care not only on snow and ice, but on dry and wet roads as well.

WARNING

Studded tires may require longer braking distances on dry or wet paved surfaces. Failure to allow for adequate braking distance could result in serious personal injury or death.

- Traction is considerably reduced as snow tires approach 50% tread wear, and replacement should be considered in order to maintain effectiveness in heavy snow conditions.
- Tire speed rating - When lower-speed-rated winter tires replace higher-speed-rated touring and high performance all-season radial tires, do not exceed the lower-rated speed.
- Follow recommendations in the vehicle Owner's Manual for winter tires, studs and chains.
- Consult your tire dealer, the U.S. Tire Manufacturers Association (www.ustires.org), or your state's Department of Transportation (DOT) for information regarding regulatory and seasonal restrictions for stud usage.
- Also see the "Tire Mixing" section in this manual for more details.
- Toyo Tires recommends that snow tires be installed in matched sets of four.

PROPER SELECTION OF TIRES

When tires need to be replaced, don't guess what tire is right for your vehicle. First look at the vehicle Owner's Manual or the Tire Information Placard. They tell you the size of the tires that were on the vehicle as original equipment.

Replacement tires for any vehicle must be of a size, load range and load capacity (by inflation) that are capable of supporting the same load as the vehicle's originally installed (OE) tires. Avoid installing used tires on a vehicle. There is no way to determine what road hazards or abuse a previously owned tire may have incurred.

Based on consumer contact information, Toyo has noted an increasing trend on the part of some tire installers to disregard fundamental safety practices when replacing original tires on cars and light trucks.

The 'Golden Rule' for installing replacement tires on autos and light trucks:

"Replacement tires must be of a size, load range and load capacities (by inflation) that are capable of supporting the load of the vehicle's originally installed (O.E.) tires."

WARNING

Failure to install tires with adequate load capacity will result in tire fatigue and sudden tire failure. This could lead to loss of vehicle control, possibly resulting in personal injury or death.

Certain vehicle performance parameters, including ride comfort and handling, may be affected by substitute tire sizes. In some cases, particularly for SUVs and light trucks, a failure to follow the vehicle manufacturer's recommendations for tire replacement could adversely affect the safe handling of the vehicle, possibly resulting in a loss of vehicle control leading, to personal injury or death.

TIRE AND WHEEL MATCHING AND MOUNTING

Any attempt to mount a tire on a wheel with a different diameter will result in an explosion of the tire/wheel assembly that could cause severe personal injury or death. Prior to mounting any tire, always check the wheel identification stamp to verify the correct wheel diameter. Always check the tire size molded onto the sidewall. Never exceed 40 psi when seating the tire beads onto the wheel. Always stand well clear of any tire mounting operation. This is especially important when the service operator inflates the tire. If the tire has been improperly mounted, it could burst with explosive force causing serious personal injury or death. A new valve stem must be installed on the wheel each time a worn out passenger or light truck tire is replaced. Removing and replacing tires on wheels can be dangerous. Attempting to mount tires with improper tools or procedures could result in a tire explosion, causing serious personal injury or death. This is a job for your authorized Toyo Tires dealer or other qualified tire service location only.

Serious personal injury or death can result from:

- Failure to select the proper tire and wheel. The tire must match the width and diameter requirements of the wheel. When mounting truck type radial tires use only wheels approved for radial tires.
- Failure to inspect both the tire and wheel. The wheel must be free of cracks, dents, chips, and rust. The tire must be free of bead damage, cuts, and punctures.
- Failure to follow proper procedures. For proper mounting procedures, consult the U.S. Tire Manufacturers Association's publication, "Care and Service of Passenger and Light Truck Tires" (ref.: www.ustires.org).
- Exceeding the maximum bead seating pressure of 40 psi. Be absolutely certain beads are fully seated before adjusting the inflation pressure to the level recommended for vehicle operation.

Never put flammable substances in the tire/wheel assemblies at any time. Never put any flammable substance into a tire/wheel assembly and attempt to ignite it in order to seat the beads.

NOTICE

In some cases, the vehicle manufacturer may specifically advise against replacing fewer than all four tires. Always check and follow the recommendations in the vehicle Owner's Manual. For 4WD and AWD vehicles, even small differences in outside diameter may cause drivetrain damage or mechanical malfunction.

REPLACEMENT TIRES FOR LIGHT TRUCKS – P-METRIC VS. LT-TRUCK

Tire installers should exercise extreme caution when replacing tires on light trucks. The maximum load capacity stamped on the sidewall of a P-metric tire is reduced by a factor of 1.1 when used on a light truck, a sport utility vehicle or a trailer.



P-metric and LT-metric tires are not necessarily interchangeable. P-metric and LT-metric tires follow completely different Load/Inflation tables and are designed to carry different loads at different pressures. LT-metric tires carry their load at higher inflation pressures and do not always have adequate load capacity to replace P-metric tires of the same size. After reducing a P-metric tire's load rating by dividing by 1.1 for fitment on a Light Truck, the P-metric tire may not offer sufficient load capacity to replace an LT-metric tire of the same size. Contact your Toyo Tires dealer or Toyo Tires Technical Service for help determining how to choose a proper replacement size. Driving with underinflated or overloaded tires may result in immediate tire failure, which can cause an accident and could lead to serious personal injury or death. When a P-metric or metric tire is installed on a light truck (SUV, pickup, minivan), the load rating is reduced by dividing by 1.1.

(This load reduction factor is prescribed by Federal Motor Vehicle Safety Standards (FMVSS) and is based on the expectation that passenger-type tires may experience more severe loading and usage conditions when applied to light trucks.) For example, 305/50R20 has a maximum load capacity of 3086 lbs. If this tire is fitted to a light truck, the actual allowable load for the tire is 2805 lbs. (3086 lbs. divided by 1.1). Consult the load and inflation charts that can be found at www.toyotires.com. Contact Toyo Tires Technical Service with any tire replacement questions: (800) 442-8696 (Pacific Time)

IF REPLACING FEWER THAN FOUR (4) TIRES

IMPORTANT!

In some cases, the vehicle manufacturer may specifically advise against replacing fewer than all four tires. Always check and follow the recommendations in the vehicle owner's manual. For 4WD and AWD vehicles, even small differences in outside diameter may cause drivetrain damage or mechanical malfunction.

When replacing tires on a vehicle, it is recommended and preferred that all four tires be replaced at the same time for continued optimal vehicle performance. However, for those cases where this is not feasible, below are some general guidelines to consider when replacing fewer than four tires for a light vehicle, whether it is one or two tires. If the vehicle manufacturer has alternate recommendations, always follow their recommendations.

REPLACING TWO (2) TIRES—When a pair of replacement tires is selected in the same size and construction as those on the vehicle, the two newer tires must be installed on the rear axle. All tires must be the same speed rating and must be of equal or higher speed rating than the tire that came as original equipment on the vehicle. New tires with deeper tread will provide better grip and evacuate water more effectively, which is important as a driver approaches (wet) hydroplaning situations. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.


REPLACING ONE (1) TIRE—Replacing a single tire on a vehicle can have an adverse effect on suspension systems, gear ratios, transmission and tire treadwear. If single-tire replacement is unavoidable, it is recommended that the single new tire be paired with the tire that has the deepest tread depth and both be placed on the rear axle. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.

ROLLOVER PROPENSITY OF LIFTED LIGHT TRUCKS



Consumers should be aware that the installation of larger-diameter tires, including off-road type tires, combined with modified suspensions (lift kits) for increased off-road ground clearance, will adversely affect the handling and maneuverability characteristics of the vehicle compared to the factory-equipped (original) vehicle.

When vehicles, especially light trucks, are lifted, the center of gravity is heightened, thus making them more prone to rollover. Rollover propensity is further increased with full passenger and/or cargo loads. Other aspects of handling and maneuverability may also be affected by altering the original manufacturer's design.

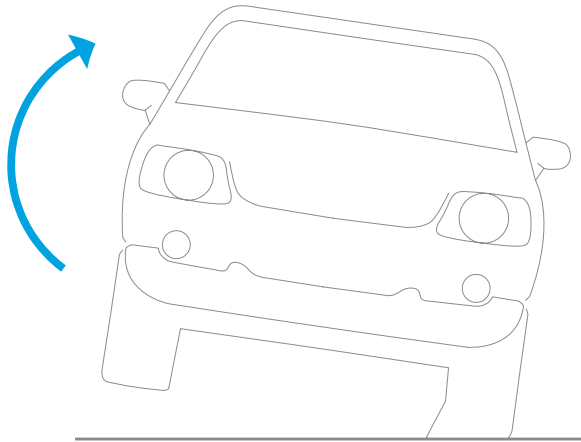

As with any vehicle, Extreme Care must be used to prevent loss of control or rollover during sharp turns or abrupt maneuvers.

Always wear seat belts and drive safely, recognizing that reduced speeds and specialized driving techniques may be required.



The installation of larger tire and wheel combinations will reduce the effectiveness of anti-lock braking systems and increase stopping distance.

Failure to safely drive any vehicle equipped with a lift kit may result in an accident resulting in serious injury or death.

Do not drive a lifted vehicle unless you are familiar with its unique handling characteristics and are confident of your ability to maintain control under all driving conditions. Some modifications (and combinations of modifications) are not recommended and may not be permitted in your state.

Consult your owner's manual, the instructions accompanying the lift kit and state laws before undertaking any vehicle suspension modifications.

You are responsible for the legality and safety of the vehicle you modify using lift-kit and tire modifications.

For more information, please contact Toyo Tire U.S.A. Corp.'s Consumer Relations Department at 800-442-8696.

Toyo Tire U.S.A. Corp.
PO Box 6052
Cypress, CA 90630-5249
www.toyotires.com

(TSD-12-012) 02/14
02/27/14 Rev. 1

CONSUMER ADVISORY

TOYO TIRES®

TSD-17-001

October 2017

RECOMMENDATIONS ON THE PROPER USE AND HANDLING OF CERTAIN TOYO TIRES

This advisory supersedes TSD-09-001, dated May 29, 2009, and applies only to the following products:

All Proxes® RR All Proxes® R1R™ All Proxes® RS1 All Proxes® R888™
All Proxes® RA1 All Proxes® R888R™ All Proxes® TQ

This advisory addresses the proper use and handling of these tires in colder climates. Tires exposed to temperatures below 15°F (-9°C) will lose rubber compound flexibility. Under certain conditions, they may even experience cracking (see image below).



The rubber compounds used in these tires have unique properties that, when compared to other tires, can cause them to lose some of their flexibility when used or handled in conditions below 15°F (-9°C). This loss in flexibility can lead to potential cracking and other damage to the tire.

TO MINIMIZE THE CHANCES OF THIS HAPPENING, CONSUMERS AND INSTALLERS ARE ADVISED TO FOLLOW THESE INSTRUCTIONS:

1. Do not move or operate the car with these tires in conditions below 15°F (-9°C).
ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!
2. Avoid moving these tires in conditions below 15°F (-9°C).
3. Before mounting or dismounting, store these tires for at least 24 hours in a temperature-controlled environment of 68°F (20°C) or warmer, and **ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!**
4. Remove these tires from the vehicle and deflate to half the normal air pressure during prolonged periods of non-use or storage.

For more information, please contact Toyo Tire U.S.A. Corp.'s
Consumer Relations Department at 800-442-8696.

Toyo Tire U.S.A. Corp.
PO Box 6052
Cypress, CA 90630-5249
www.toyotires.com

TSD-17-001 10/17

Item #0180253

TSD-12-005

August 2012

LOAD CAPACITY OF TOYO PROXES® TQ™ TIRES

Toyo Tire U.S.A. Corp. is introducing the following sizes in the Proxes TQ product line that are designed using the Light Load (LL) standard of the Tire and Rim Association (T.R.A.):

P275/45R16 94 LL, P275/40R17 93 LL, P315/35R17 93 LL, P345/40R17 106 LL, P315/35R18 95 LL

LOAD IDENTIFICATION:

Under the T.R.A.'s designation, tire load is divided into three categories: Light Load (LL), Standard Load (SL), and Extra Load (XL). Each refers to the tire's ability to carry a certain load at a given air pressure. Tires designed for LL, SL, and XL duty are usually identified as such on the tire sidewall.



Figure 1—Light Load molded into sidewall

CAUTION

A Light Load tire carries less load at the same inflation pressure and has a lower maximum load capacity than the equivalent Standard Load size. Figure 2 to the right shows the different load capacities of the three different categories of tires of the same size.

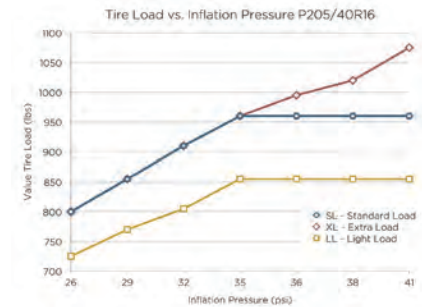


Figure 2—Tire Load vs. Inflation chart

GENERAL ADVICE FOR DETERMINING CORRECT INFLATION PRESSURE:

“Plus size” tires, including the subject tires, may require higher inflation pressures than what is indicated on the vehicle Tire Information Placard or in the vehicle Owner’s Manual. Any “plus size” tire should be inflated to a pressure that provides equal or greater load capacity compared to the original equipment (OE) tire. Always refer to tire industry load and inflation tables to determine correct inflation values when installing “plus sizes,” or contact Toyo Tires for assistance.

WARNING

Always observe this advice to avoid overloading the tire. Tire overload will contribute to tire fatigue and eventual tire failure. Tire failure may lead to an accident, which may result in injury or death.

Single Load per tire in pounds

Size	Tire Load Limit at Various Cold Inflation Pressures					
	PSI	26	29	32	35	36
P275/45R16 94LL	lbs.	1,190	1,279	1,356	1,433	1,477
P275/40R17 93LL	lbs.	1,235	1,301	1,367	1,433	—
P315/35R17 93LL	lbs.	1,246	1,323	1,378	1,433	—
P345/40R17 106LL	lbs.	1,687	1,808	1,929	2,039	2,094
P315/35R18 95LL	lbs.	1,224	1,312	1,400	1,477	1,521

Figure 3—T.R.A. Load & Inflation Table

Questions may be directed to Toyo Tires' Consumer Relations Group at: 800-442-8696 (Monday thru Friday, 6:00AM to 4:00PM Pacific Time)	Toyo Tire U.S.A. Corp. PO Box 6052 Cypress, CA 90630-5249 www.toyotires.com	Load and inflation tables are published by The Tire & Rim Association, Inc., 175 Montrose West Ave., Suite 150, Copley, OH 44321.
--	--	---

TSD-12-005 08/12

Item # 0180327, 3.5M

QUICK REFERENCE GUIDE – LIGHT TRUCK/SUV/CUV

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	CELSIUS CAR80	CELSIUS CUV	H08+	M-55	OPEN COUNTRY MT III	OPEN COUNTRY C/T	OPEN COUNTRY HT II	OPEN COUNTRY MT	OPEN COUNTRY Q/T	OPEN COUNTRY R/T	PROXES ST III
15	185/60R15C											
	235/75R15											
	30X9.50R15LT											
	31X10.50R15LT											
	33X10.50R15LT											
	33x12.50R15LT											
	33X13.50R15LT											
	35X13.50R15LT											
	37X14.50R15LT											
	LT215/75R15											
	LT235/75R15											
	P215/75R15											
	P225/75R15											
	P235/75R15											
	P265/75R15											
16	195/75R16C											
	205/75R16C											
	215/65R16											
	215/70R16											
	225/70R16											
	225/75R16C											
	235/65R16C											
	235/70R16											
	245/70R16											
	245/75R16											
	255/65R16											
	255/70R16											
	265/70R16											
	265/75R16											
	LT215/85R16											
	LT225/75R16											
	LT235/85R16											
	LT245/75R16											
	LT255/85R16											
	LT265/75R16											
	LT285/75R16											
	LT295/75R16											
	LT305/70R16											
	LT315/75R16											
	LT385/70R16											
P225/75R16												
P235/70R16												
P245/70R16												
P265/70R16												
17	215/65R17											
	225/55R17											
	225/60R17											
	225/65R17											
	235/55R17											
	235/60R17											
	235/65R17											
	235/70R17											
	235/75R17											
	245/65R17											
	245/70R17											
	255/60R17											
	255/65R17											
	255/70R17											
	265/65R17											
	265/70R17											
	275/55R17											
275/60R17												
33X12.50R17LT												

WHEEL DIA.	TIRE SIZE	CELSIUS CARGO	CELSIUS CUV	H08+	M-55	OPEN COUNTRY MT III	OPEN COUNTRY CT	OPEN COUNTRY HT II	OPEN COUNTRY MT	OPEN COUNTRY QT	OPEN COUNTRY RT	PROXES ST III	
17	35X11.50R17LT												
	35X12.50R17LT												
	37X12.50R17LT												
	37X13.50R17LT												
	40X13.50R17LT												
	LT225/75R17												
	LT235/80R17												
	LT245/65R17												
	LT245/70R17												
	LT245/75R17												
	LT255/75R17												
	LT255/80R17												
	LT265/70R17												
	LT275/70R17												
	LT285/70R17												
	LT285/75R17												
	LT295/70R17												
	LT305/70R17												
	LT315/70R17												
	P235/75R17												
	P245/65R17												
	P265/65R17												
	P265/70R17												
	P285/70R17												
	225/55R18												
	225/60R18												
	235/55R18												
	235/60R18												
235/65R18													
245/60R18													
255/55R18													
255/60R18													
255/65R18													
255/70R18													
265/60R18													
265/65R18													
265/70R18													
275/65R18													
285/60R18													
295/45R18													
33X12.50R18LT													
35X12.50R18LT													
37X12.50R18LT													
37X13.50R18LT													
38X13.50R18LT													
38X15.50R18LT													
LT255/65R18													
LT265/70R18													
LT275/65R18													
LT275/70R18													
LT285/60R18													
LT285/65R18													
LT285/70R18													
LT285/75R18													
LT295/70R18													
LT305/65R18													
LT315/70R18													
LT325/60R18													
LT325/65R18													
P235/65R18													
P255/65R18													
P265/65R18													

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – LIGHT TRUCK/SUV/CUV

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	CELSIUS CARGO	CELSIUS CUV	H00+	M-55	OPEN COUNTRY A/T III	OPEN COUNTRY C/T	OPEN COUNTRY M/T II	OPEN COUNTRY M/T	OPEN COUNTRY Q/T	OPEN COUNTRY R/T	PROXES ST III	
19	225/55R19												
	235/45R19												
	235/50R19												
	235/55R19												
	255/50R19												
	255/55R19												
	255/60R19												
	265/50R19												
	275/55R19												
	P225/55R19												
	P245/55R19												
	P255/60R19												
	235/55R20												
	245/50R20												
255/45R20													
255/50R20													
255/55R20													
265/45R20													
265/50R20													
275/40R20													
275/45R20													
275/50R20													
275/55R20													
275/60R20													
285/45R20													
285/50R20													
295/40R20													
295/45R20													
305/50R20													
305/55R20													
315/35R20													
33X12.50R20LT													
35X11.50R20LT													
35X12.50R20LT													
35X13.50R20LT													
35X15.50R20LT													
37X12.50R20LT													
37X13.50R20LT													
38X13.50R20LT													
38X15.50R20LT													
40X15.50R20LT													
LT265/60R20													
LT275/55R20													
LT275/60R20													
LT275/65R20													
LT285/55R20													
LT285/60R20													
LT285/65R20													
LT295/55R20													
LT295/60R20													
LT295/65R20													
LT305/55R20													
LT315/60R20													
LT325/60R20													
P235/55R20													
P245/50R20													
P245/60R20													
P285/55R20													
21	275/50R21												
	295/35R21												

WHEEL DIA.	TIRE SIZE	CELSIUS CARGO	CELSIUS CIVV	H00+	M-55	OPEN COUNTRY M/T III	OPEN COUNTRY C/T	OPEN COUNTRY M/T II	OPEN COUNTRY M/T	OPEN COUNTRY Q/T	OPEN COUNTRY R/T	PROXES S/T III	
22	265/35R22												
	265/40R22												
	275/40R22												
	275/50R22												
	285/35R22												
	285/40R22												
	285/45R22												
	295/30R22												
	295/35R22												
	305/40R22												
	305/45R22												
	335/25R22												
	33X12.50R22LT												
	35X12.50R22LT												
	37X12.50R22LT												
	37X13.50R22LT												
	38X13.50R22LT												
	38X15.50R22LT												
	40X15.50R22LT												
	LT285/50R22												
LT285/55R22													
LT295/50R22													
LT295/55R22													
LT325/50R22													
LT375/45R22													
P285/45R22													
24	285/35R24												
	285/40R24												
	295/30R24												
	305/35R24												
	37X13.50R24LT												
	38X15.50R24LT												
	LT375/40R24												
26	40X15.50R24LT												
	40X15.50R26LT												
	42X15.50R26LT												

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – PASSENGER CAR

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENSA A/S II	EXTENSA HP II	OPEN COUNTRY SVS	PROXES P1 R	PROXES P888R	PROXES R41	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT A/S	PROXES ST III	PROXES TO	
13	185/60R13															
	205/60R13															
	225/45R13															
14	185/60R14															
	185/65R14															
	185/70R14															
	P175/65R14															
	P195/70R14															
	P195/75R14															
	P205/75R14															
	P215/70R14															
	185/60R15															
	185/65R15															
195/45R15																
195/50R15																
195/55R15																
195/60R15																
195/65R15																
205/50R15																
205/50ZR15																
205/65R15																
205/70R15																
205/75R15																
215/70R15																
225/45ZR15																
225/50ZR15																
225/70R15																
235/50ZR15																
235/75R15																
245/40ZR15																
32X9.50R15LT																
35X9.50R15LT																
P175/65R15																
P185/60R15																
P205/70R15																
P205/75R15																
P215/60R15																
P215/65R15																
P215/75R15																
P225/70R15																
P225/75R15																
P235/75R15																
16	185/55R16															
	185/60R16															
	195/50R16															
	195/50ZR16															
	195/55R16															
	205/45R16															
	205/45ZR16															
	205/50R16															
	205/50ZR16															
	205/55R16															
	205/55ZR16															
	205/60R16															
	205/65R16															
	215/55R16															
	215/60R16															
215/65R16																

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENSA MS II	EXTENSA HP II	OPEN COUNTRY SXS	PROXES R1R	PROXES R080R	PROXES RA1	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT MS	PROXES ST III	PROXES TQ	
16	225/45ZR16															
	225/50R16															
	225/50ZR16															
	225/55R16															
	225/60R16															
	225/65R16															
	235/60R16															
	235/65R16															
	245/45ZR16															
	245/50R16															
	255/50ZR16															
	P255/50R16															
	P255/50ZR16															
	P275/45R16															
	17	205/40R17														
		205/40ZR17														
205/45R17																
205/45ZR17																
205/50R17																
205/50ZR17																
215/45R17																
215/45ZR17																
215/50R17																
215/55R17																
215/60R17																
225/45R17																
225/45ZR17																
225/50R17																
225/50ZR17																
225/55R17																
225/60R17																
225/65R17																
235/40R17																
235/40ZR17																
235/45R17																
235/45ZR17																
235/50R17																
235/55R17																
235/60R17																
235/65R17																
245/35ZR17																
245/40R17																
245/40ZR17																
245/45R17																
245/45ZR17																
245/50R17																
255/40R17																
255/40ZR17																
255/45R17																
255/60R17																
265/60R17																
275/40R17																
275/40ZR17																
275/55R17																
275/60R17																
315/35R17																
315/35ZR17																
P215/65R17																

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – PASSENGER CAR

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENSA M/S II	EXTENSA HP II	OPEN COUNTRY SX5	PROXES R1R	PROXES R888R	PROXES RA1	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT M/S	PROXES ST III	PROXES TQ	
17	P275/40R17															
	P315/35R17															
	P345/40R17															
	205/35ZR18															
	215/40R18															
	215/40ZR18															
	215/45R18															
	225/40R18															
	225/40ZR18															
	225/45R18															
	225/45ZR18															
	225/50R18															
	225/55R18															
	225/60R18															
	235/30ZR18															
	235/40R18															
	235/40ZR18															
	235/45R18															
	235/45ZR18															
	235/50R18															
	235/50ZR18															
	235/55R18															
	235/60R18															
	235/65R18															
	245/35R18															
	245/35ZR18															
	245/40R18															
	245/40ZR18															
	245/45R18															
	245/45ZR18															
	18	245/50R18														
		245/55R18														
		245/60R18														
		245/640R18														
255/35R18																
255/35ZR18																
255/40R18																
255/40ZR18																
255/45R18																
255/45ZR18																
255/55R18																
255/60R18																
265/35R18																
265/35ZR18																
265/40R18																
265/40ZR18																
265/45R18																
265/60R18																
275/35R18																
275/35ZR18																
275/40R18																
275/40ZR18																
285/30ZR18																
285/35R18																
285/35ZR18																
285/60R18																
285/650R18																

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENSA A/S II	EXTENSA HP II	OPEN COUNTRY SXS	PROXES R1R	PROXES R888R	PROXES RA1	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT A/S	PROXES ST III	PROXES TQ	
18	285/680R18															
	295/30ZR18															
	295/35R18															
	295/35ZR18															
	295/45R18															
	305/35ZR18															
	315/30ZR18															
	335/30ZR18															
	335/710R18															
	345/35ZR18															
	P275/35ZR18															
	P305/35ZR18															
	P315/35R18															
	19	225/35R19														
225/35ZR19																
225/40R19																
225/40ZR19																
225/45R19																
225/45ZR19																
235/35R19																
235/35ZR19																
235/40R19																
235/40ZR19																
235/50R19																
235/55R19																
245/35R19																
245/35ZR19																
245/40R19																
245/40ZR19																
245/45R19																
245/45ZR19																
245/50R19																
255/30R19																
255/30ZR19																
255/35R19																
255/35ZR19																
255/40R19																
255/40ZR19																
255/45R19																
255/50R19																
255/55R19																
265/30R19																
265/30ZR19																
265/35R19																
265/35ZR19																
265/40ZR19																
265/50R19																
275/30R19																

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – PASSENGER CAR

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENSA M/S II	EXTENSA HP II	OPEN COUNTRY SX5	PROXES R1R	PROXES R888R	PROXES RA1	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT M/S	PROXES ST III	PROXES TQ	
19	275/30ZR19															
	275/35R19															
	275/35ZR19															
	275/40R19															
	275/40ZR19															
	285/30R19															
	285/30ZR19															
	285/35R19															
	285/35ZR19															
	285/40R19															
	295/30R19															
	295/30ZR19															
	295/35ZR19															
	305/30ZR19															
	325/30R19															
	325/30ZR19															
	345/30ZR19															
20	225/30R20															
	225/35R20															
	225/35ZR20															
	235/30ZR20															
	235/35R20															
	235/55R20															
	245/30ZR20															
	245/35R20															
	245/35ZR20															
	245/40R20															
	245/40ZR20															
	245/45R20															
	245/45ZR20															
	245/50R20															
	255/30ZR20															
	255/35R20															
	255/35ZR20															
	255/40R20															
	255/40ZR20															
	255/45R20															
	255/50R20															
	265/30ZR20															
	265/35R20															
	265/35ZR20															
	265/45R20															
	265/50R20															
	275/30R20															
	275/30ZR20															
	275/35R20															
	275/35ZR20															
	275/40R20															
	275/40ZR20															
	275/45R20															
	275/50R20															
275/55R20																
285/25ZR20																
285/30R20																
285/30ZR20																
285/35R20																
285/35ZR20																
285/50R20																

WHEEL DIA.	TIRE SIZE	CELSIUS	CELSIUS SPORT	EXTENGA A/S II	EXTENGA HP II	OPEN COUNTRY SVS	PROXES P1R	PROXES P888R	PROXES RA1	PROXES RR	PROXES RS1	PROXES SPORT	PROXES SPORT A/S	PROXES ST III	PROXES TQ	
20	295/25R20															
	295/25ZR20															
	295/30R20															
	295/30ZR20															
	295/35R20															
	295/35ZR20															
	295/40R20															
	295/45R20															
	305/25ZR20															
	305/30ZR20															
	305/35ZR20															
	305/50R20															
	315/30ZR20															
	315/35R20															
	325/30ZR20															
21	245/35R21															
	255/40R21															
	265/35R21															
	265/45R21															
	275/40R21															
	275/45R21															
	275/50R21															
	285/35R21															
	295/35R21															
	295/40R21															
	315/35R21															
	315/40R21															
	325/30R21															
	265/40R21															
	285/40R21															
22	255/30R22															
	265/30R22															
	265/35R22															
	265/40R22															
	275/35R22															
	275/40R22															
	285/35R22															
	285/40R22															
	285/45R22															
	295/25R22															
	295/30R22															
	295/35R22															
	295/40R22															
	305/40R22															
	305/45R22															
315/25R22																
335/25R22																
24	285/35R24															
	285/40R24															
	295/30R24															
	305/35R24															

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – WINTER

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	OBSERVE G3-ICE	OBSERVE G3-6	OPEN COUNTRY WLT 1
13	175/70R13			
	175/65R14			
	175/70R14			
14	185/60R14			
	185/65R14			
	185/70R14			
	195/70R14			
	175/65R15			
15	185/55R15			
	185/60R15			
	185/65R15			
	195/50R15			
	195/55R15			
	195/60R15			
	195/65R15			
	205/65R15			
	205/70R15			
	215/70R15			
	235/75R15			
16	265/70R15			
	185/50R16			
	185/55R16			
	195/45R16			
	195/50R16			
	195/55R16			
	195/60R16			
	205/55R16			
	205/60R16			
	205/65R16			
	205/70R16			
	215/55R16			
	215/60R16			
	215/65R16			
	215/70R16			
	225/55R16			
	225/60R16			
	225/65R16			
	225/70R16			
	225/75R16			
	235/60R16			
	235/65R16			
	235/70R16			
235/75R16				
245/70R16				
245/75R16				
255/65R16				
255/70R16				
265/70R16				
265/75R16				
275/70R16				
LT215/85R16				
LT225/75R16				
LT235/85R16				
LT245/75R16				
LT265/75R16				
17	205/45R17			
	205/50R17			
	215/40R17			
	215/45R17			
	215/50R17			
	215/55R17			
	215/60R17			
	215/65R17			
	225/45R17			
225/50R17				

WHEEL DIA.	TIRE SIZE	OBSERVE G3-ICE	OBSERVE G3-6	OPEN COUNTRY WEL T	
17	225/55R17				
	225/60R17				
	225/65R17				
	235/45R17				
	235/50R17				
	235/55R17				
	235/60R17				
	235/65R17				
	235/70R17				
	245/40R17				
	245/45R17				
	245/65R17				
	245/70R17				
	255/65R17				
	255/70R17				
	265/60R17				
	265/65R17				
	265/70R17				
	275/65R17				
	LT235/80R17				
	LT245/70R17				
LT245/75R17					
LT265/70R17					
LT285/70R17					
P285/70R17					
18	215/45R18				
	215/55R18				
	225/40R18				
	225/45R18				
	225/50R18				
	225/55R18				
	225/60R18				
	235/40R18				
	235/45R18				
	235/50R18				
	235/55R18				
	235/60R18				
	235/65R18				
	245/40R18				
	245/45R18				
	245/50R18				
	245/55R18				
	245/60R18				
	255/35R18				
	255/40R18				
	255/45R18				
	255/55R18				
	255/60R18				
	255/65R18				
	255/70R18				
	265/60R18				
	265/65R18				
	265/70R18				
	275/60R18				
	275/65R18				
	285/60R18				
	LT265/70R18				
	LT275/65R18				
LT275/70R18					

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE – WINTER

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	OBSERVE 63-ICE	OBSERVE 65W-6	OPEN COUNTRY WLT 1
19	225/35R19			
	225/40R19			
	225/55R19			
	235/35R19			
	235/40R19			
	235/45R19			
	235/50R19			
	235/55R19			
	245/40R19			
	245/45R19			
	245/50R19			
	245/55R19			
	255/35R19			
	255/40R19			
	255/45R19			
	255/50R19			
	255/55R19			
	255/60R19			
	265/50R19			
	265/55R19			
275/40R19				
275/55R19				
285/40R19				
285/45R19				
20	235/45R20			
	235/55R20			
	245/40R20			
	245/45R20			
	245/50R20			
	255/35R20			
	255/45R20			
	255/50R20			
	255/55R20			
	265/40R20			
	265/45R20			
	265/50R20			
	275/35R20			
	275/40R20			
	275/45R20			
	275/50R20			
	275/55R20			
275/60R20				
285/50R20				
315/35R20				
LT265/60R20				
LT275/65R20				
21	265/45R21			
	275/50R21			
	285/35R21			
	295/35R21			
	295/40R21			
22	325/30R21			
	275/40R22			
	275/50R22			
	285/45R22			

CUSTOMER SERVICE CENTER

800-557-8696
FAX: 888-329-8696

Office Hours

Monday thru Friday
6:00AM to 4:00PM Pacific Time

DISTRIBUTION CENTERS

WHITE, GA

3660 Highway 411 Northeast
White, GA 30184

ONTARIO, CA

2151 South Vintage Avenue
Ontario, CA 91761

LEBANON, TN

488 Bridgestone Parkway
Lebanon, TN 37090

FREDERICKSBURG, PA

2869 Route 22
Fredericksburg, PA 17026

ROANOKE, TX

501 Henrietta Creek Road
Roanoke, TX 76262

Connect with Toyo Tires.



OUTLINE





LAST