

2021

DATA BOOK & OE FITMENT GUIDE

Retailer Use Only



2021 DATA BOOK & OE FITMENT GUIDE

GOODYEAR

DUNLOP
TIRES

KELLY
TIRES

GOODYEAR

DUNLOP
TIRES

KELLY
TIRES

2021

PRODUCT INTRODUCTIONS



GOODYEAR ASSURANCE COMFORTDRIVE™ Pg. 58

Product Screen Fit:
Grand Touring All-Season (Premium)
For: Cars, Minivans, CUVs and SUVs
Number of Sizes: 44
Size Range: 16" – 20"
Warranty:
60,000 miles / 95,000 kilometre



GOODYEAR WRANGLER® WORKHORSE® HT Pg. 80

Product Screen Fit:
On-Road (Mid-Tier)
For: CUVs, SUVs, Light Trucks
and Heavy-Duty Light Trucks
Number of Sizes:
12 (Phase 1) 22 (Phase 2)
Size Range: 15" – 22"
Warranty:
60,000 miles / 95,000 kilometre



GOODYEAR WINTERCOMMAND® ULTRA Pg. 122

Product Screen Fit:
Studdless Winter (Premium)
For: Cars, Minivans, CUVs, SUVs,
Sports Cars, Sports Coupes and
Performance Sedans
Number of Sizes: 50
Size Range: 15" – 20"



GOODYEAR WRANGLER® WORKHORSE® AT Pg. 92

Product Screen Fit:
On-/Off-Road (Mid-Tier)
For: CUVs, SUVs, Light Trucks
and Heavy-Duty Light Trucks
Number of Sizes: 39
Size Range: 16" – 22"
Warranty:
50,000 miles / 80,000 kilometre



GOODYEAR WRANGLER® WORKHORSE® RT Pg. 104

Product Screen Fit:
On-/Off-Road (Mid-Tier)
For: CUVs, SUVs, Light Trucks
and Heavy-Duty Light Trucks
Number of Sizes: 19
Size Range: 15" – 20"
Warranty:
40,000 miles / 65,000 kilometre

DRIVE GROWTH THROUGH PRODUCT SCREEN OPTIMIZATION

	COMPUTER TOURING			PERFORMANCE			ALL-TERRAIN			WINTER			
	PASSENGER	SUV/CUV	TOURING	SPORT	ULTRA HIGH	ON-ROAD	ON-/OFF-ROAD	OFF-ROAD	TRAILER	PERFORMANCE	COMPUTER TOURING	SUV/LIGHT TRUCK	
PREMIUM	Assurance WeatherReady® Assurance ComfortDrive™				Eagle® F1 SuperCar® 3R Eagle® F1 SuperCar® 3 Sport Maxx RT™ 2 Eagle® Exhilarate®	Wrangler® Fortitude HT® Wrangler® All-Terrain Adventure with Kevlar® Wrangler® M/T® with Kevlar® Endurance®				NEW WinterCommand® Ultra SP Winter Sport 30P® & 40P®		LINE EXTENSIONS WinterCommand® Ultra Winter Maxx® S18	
MID-UPPER	Assurance MaxLife®		Eagle® LS-2	Eagle® RS-9® Eagle® Sport All-Season		Wrangler® DuraTrac® Wrangler® RT NEW Wrangler® AT NEW Wrangler® AT NEW Wrangler® AT Wrangler® SR-4® TrailRunner AT®					Winter Maxx® 2 Winter Command®		
MID-LOWER	Assurance All-Season			Signature HP									
ECONOMY		Kelly Edge A/S®		Kelly Edge HP®		Kelly Edge HT® Kelly Edge AT® Kelly Edge MT®							LINE EXTENSIONS Kelly Winter Access®
OE	Assurance Finesse® Assurance® Fuel Max®	Assurance®ss Fuel Max®	Eagle® Touring	Eagle® Sport All-Season		Wrangler® Territory HT Wrangler® Territory AT Wrangler® Territory MT							

Other Product Lines and OE Filaments: Assurance ComfortTred Touring, Integrity, Grandtrek

Other Product Lines and OE Filaments: Eagle F1 OE Family, SP Sport, SP Sport Maxx Family, Sport Maxx Family, Sport Maxx RT Family, Sport Maxx Race Family, Eagle Endorcer Family, Eagle LS

Other Product Lines and OE Filaments: Force Attitude W/T, Fortera HL, Wrangler AT, Wrangler A/S, Wrangler HT, Wrangler MT, Wrangler HP & ST

Other Product Lines and OE Filaments: Eagle Ultra Grip Family, Eagle Ultra Grip GW-2, Eagle Ultra Grip GW-3, Eagle Endorcer Winter

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

©2021 The Goodyear Tire & Rubber Company. All rights reserved.



TIRE TABLE OF CONTENTS

2021 Product Introductions	1
Drive Growth Through Product Screen Optimization	2
Goodyear Technologies Defined	7
30-Day Goodyear Pledge – Love 'Em or Leave 'Em	11

PERFORMANCE

Performance Tire Product Line Chart.....	13
Performance Tire Selector Chart	14
Eagle Exhilarate	18
Eagle F1 Asymmetric All-Season, ROF, SCT	20
Eagle Sport All-Season, ROF, SCT	22
Eagle RS-A, EMT, Police, A2	24
Eagle Touring, SCT	26
Eagle Enforcer	28
Eagle LS/LS-2, ROF	30
Eagle Enforcer All Weather	32
Eagle GT II.....	33
Eagle F1 Asymmetric SUV AT.....	34
Eagle F1 Asymmetric 5, SCT	35
Eagle F1 SuperCar 3R.....	36
Eagle F1 SuperCar 3, ROF.....	38
Eagle F1 SuperCar G: 2/SuperCar, EMT, ROF.....	40
Eagle F1 Supersport.....	42
Eagle F1 Asymmetric 3, ROF, SCT, SUV	44
Eagle F1 Asymmetric 2, SUV, ROF, SCT	46
Eagle F1 Asymmetric, ROF, Asymmetric SUV	48
Eagle F1 GS-2 EMT	49
Eagle F1 GS EMT.....	49
Eagle NCT 5 EMT, ROF.....	50
Excellence, ROF	51
EfficientGrip, ROF, ROF SCT	52
EfficientGrip Performance ROF.....	52
EfficientGrip Performance	52

COMMUTER TOURING

Commuter Touring Tire Product Line Chart	53
Commuter Touring Tire Selector Chart.....	54
Assurance WeatherReady	56
Assurance ComfortDrive	58
Assurance ComforTred Touring, ComforTred	60
Assurance MaxLife.....	62
Assurance Finesse.....	64
Assurance Fuel Max.....	66
Assurance ^{CS} Fuel Max	68
Assurance All-Season	70
Integrity.....	72
Convenience Spares	74

ALL-TERRAIN

All-Terrain Tire Product Line Chart	75
All-Terrain Tire Selector Chart.....	76
Wrangler Workhorse HT	80
Wrangler SR-A.....	82
Wrangler Fortitude HT	84
Wrangler Territory HT	86
Wrangler HT	87
Wrangler HP	88
Wrangler ST	89
Fortera HL	90
Fortera SL	91
Wrangler Workhorse AT	92
Wrangler All-Terrain Adventure with Kevlar, Pro-Grade.....	94
Wrangler TrailRunner AT	96
Wrangler Territory AT.....	98
Wrangler Enforcer AT	99
Wrangler AT/S	100
Wrangler AT.....	101
Wrangler DuraTrac.....	102
Wrangler Workhorse RT.....	104
Wrangler MT/R with Kevlar	106
Wrangler Territory MT	108
Fierce Attitude M/T	109
Wrangler Enforcer MT	110
Wrangler MT	110

Trailer

Endurance	111
-----------------	-----

WINTER

Winter Tire Product Line Chart.....	113
Winter Tire Selector Chart	114
Ultra Grip Performance Gen-1	116
Ultra Grip 8 Performance, ROF	118
Eagle Enforcer Winter.....	119
Eagle Ultra Grip GW-3, ROF.....	120
Eagle Ultra Grip GW-2.....	120
WinterCommand Ultra	122
WinterCommand	124
Ultra Grip Winter	126
Ultra Grip SUV ROF	127

Goodyear OE Fitments.....	129
---------------------------	-----

TIRE TABLE OF CONTENTS

Dunlop Technologies Defined.....	141
Dunlop 30-Day Pledge.....	145

PERFORMANCE

Performance Tire Product Line Chart.....	146
Performance Tire Selector Chart.....	147
Signature HP.....	152
SP Sport Maxx A1 A/S.....	154
SP Sport Maxx A1-A A/S.....	154
SP Sport 5000, DSST CTT, DSST NRT.....	156
SP Sport 5000M, DSST CTT.....	156
SP Sport 7000 A/S.....	158
SP Sport 7010 A/S DSST.....	159
SP Sport Maxx GT, NST, ROF.....	160
Sport Maxx RT2, ROF, NST.....	162
Sport Maxx RT, ROF.....	164
SP Sport Maxx 050, DSST CTT, DSST NRT.....	166
Direzza DZ102.....	167
Sport Maxx Race 2.....	168
SP Sport Maxx.....	170
SP Sport Maxx GT 600, DSST.....	172
SP Sport 01, DSST ROF.....	174

COMMUTER TOURING

Commuter Touring Tire Product Line Chart.....	176
Commuter Touring Tire Selector Chart.....	177
Signature II.....	178
SP 31.....	179
SP 31 A A/S.....	179
Enasave.....	180
Grandtrek AT20.....	182
Grandtrek PT20.....	183
Grandtrek PT21.....	183
Grandtrek ST30.....	184
Grandtrek ST20.....	185
Grandtrek Touring A/S, DSST.....	186
Grandtrek PT2A.....	187
Grandtrek PT3A.....	187
Grandtrek AT23.....	188
MZ MK3 Spare.....	189

WINTER

Winter Tire Product Line Chart.....	190
Winter Tire Selector Chart.....	191
SP Winter Sport 4D, NST, ROF.....	194
SP Winter Sport 3D, ROF.....	196
SP Winter Sport M3, DSST ROF.....	198
Winter Sport 5 SUV.....	199
Winter Maxx.....	200
Winter Maxx 2.....	202
Winter Maxx SJ8.....	204
Grandtrek SJ6.....	206
Grandtrek WT M3, DSST ROF.....	207
SP LT 60.....	208

Dunlop OE Fitments.....	209
-------------------------	-----

TIRE TABLE OF CONTENTS

Kelly 30-Day Test Drive Program.....	213
Kelly Tire Product Line Chart.....	214
Tire Selector Chart.....	215
Kelly Edge HP	216
Kelly Edge A/S.....	218
Kelly Edge HT	220
Kelly Edge AT.....	222
Kelly Edge MT	224
Kelly Winter Access.....	226

TIRE TABLE OF CONTENTS

TIRE FUNDAMENTALS

Tire Construction229
Tread Design230
Sidewall Information.....231
Tire Size232
Tire Terminology234

2021 GOODYEAR® TIRE LINES



THE GOODYEAR® ADVANTAGE

Discover Your World of Possibilities

DEFINING GOODYEAR



Relentless Pursuit

Since the beginning, our mission has simply been to never stop moving. To never stop exploring, iterating and trying new things. From the driverless cars of the future, to getting better traction on Mars, we're not just putting tires on your car, we're putting technology in motion.



Empowering Discovery

Movement is the only way challenges are met, opportunities are realized, and possibilities are unlocked. Goodyear makes tires for people who chase horizons, move mountains and seek out the path less traveled. And we champion those who embark on personal journeys of growth and who welcome the possibilities of the open road.



The Science of Movement

For over 120 years, we've developed the technology that keeps you moving. We've pioneered the science of keeping those four wheels safely on the ground and hugging every turn. And we're not stopping anytime soon. So, you can have the confidence to go faster, farther and more places than ever before.



Celebrate Those Who Move

From dirt tracks to super speedways and every track in between, we've been helping drivers break through the limits for decades. So, whether it's on the open road, on the track or in the stadium, motion enables humans to discover their potential.

GOODYEAR

ACTIVEBRAKING TECHNOLOGY™



ActiveBraking Technology offers enhanced stopping power on wet and dry roads.

Key line: Eagle® Exhilarate™


COMFORTEDGE® SIDEWALLS



ComfortEdge Sidewalls help provide a versatile balance of comfort and handling.

Key line: Assurance® ComforTred® Touring

ADAPTIVE SIPEGrip TECHNOLOGY

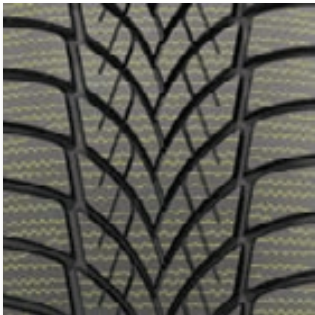

Adaptive SipeGrip Technology helps enhance gripping power under slippery conditions while maintaining dry and wet handling.

Key line: WinterCommand® Ultra

COMFORTFLEX™ TECHNOLOGY



ComfortFlex Technology consists of a specialized comfort insert in the sidewall that interacts with the sidewall apex to help dampen ride impacts and enhance steering control for smooth transitions changing lanes and side-to-side maneuvers.

Key line: Assurance® ComfortDrive®


COMFORT LAYER



A special Comfort Layer in the tread helps provide more cushion than standard passenger tires.

Key line: Assurance® ComforTred® Touring

CRYO-ADAPTIVE COMPOUND

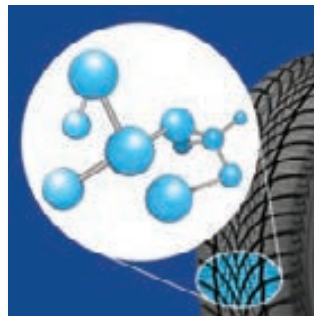

Cryo-Adaptive Compound is engineered to improve pliability to enable strong performance in extreme cold.

Key line: WinterCommand® Ultra

DUPONT™ KEVLAR® LAYER




An extra layer made with DuPont™ Kevlar® enhances toughness and soaks up road noise.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

Key line: Wrangler® All Terrain Adventure with Kevlar®

EVOLVING TRACTION® GROOVES

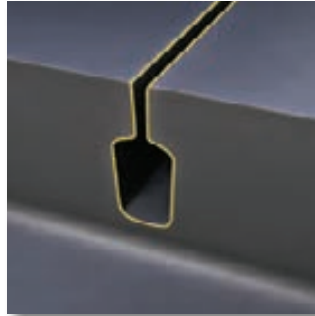

Evolving Traction® Grooves help maintain confident traction in rain and snow as the tire wears.

Key lines: Assurance® WeatherReady® and Assurance® ComfortDrive™

DUPONT™ KEVLAR® REINFORCED SIDEWALLS



DuPont™ Kevlar® reinforced sidewalls help increase sidewall puncture resistance.

Key line: Wrangler MT/R® with Kevlar®

FUEL-SAVING TREAD COMPOUND



Fuel-saving tread compound helps you gas over the life of your tires.

Key line: Assurance® Fuel Max®

DURAWALL® TECHNOLOGY



Durawall® Technology helps resist cuts and punctures to sidewalls.

Key line: Wrangler® All Terrain Adventure with Kevlar®

LIGHTWEIGHT, RACING-DERIVED CONSTRUCTION



Lightweight, racing-derived construction helps reduce unsprung mass for enhanced steering precision and handling.

Key line: Eagle® F1 Supercar® 3R

GOODYEAR® TECHNOLOGIES DEFINED

RACE-INSPIRED ULTRA HIGH-PERFORMANCE TREAD COMPOUND



Race-inspired ultra high-performance tread compound helps provide excellent dry traction.

Key line: Eagle® F1 SuperCar® 3

SOY-BASED RUBBER COMPOUND WITH SILICA



Soybean oil in the tread compound helps the rubber stay pliable and grip the road in cold temperatures. Silica enhances traction in wet conditions.

Key lines: Assurance® WeatherReady® and Assurance® ComfortDrive™

RUN ON FLAT® AND EXTENDED MOBILITY TIRE™



These tires perform when deflating or even once deflated. They allow you to drive at a top speed of 50 mph/80 kph for up to 50 mi/80 km to help you reach a safe place or service area.

Run On Flat.

Key line: Eagle® F1 Asymmetric 3 ROF


TRACTIVEGROOVE TECHNOLOGY®



TractiveGroove Technology offers enhanced traction in deep mud and snow.

Key line: Wrangler DuraTrac®

SOUNDCOMFORT TECHNOLOGY®

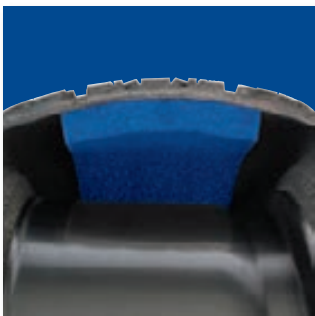

Polyurethane foam bonded to the tire's inner surface helps to reduce the level of interior vehicle noise, offering passengers a quieter, more comfortable ride.



Key line: Eagle® Touring SCT

TREDLOCK® TECHNOLOGY



TredLock Technology microgrooves help provide biting edges for enhanced wet traction and lock together for confident grip in turns.

Key lines: Assurance® WeatherReady® and Assurance® ComfortDrive™

V-TRED™ TECHNOLOGY



V-Tred™ Technology features hydro-dynamic grooves to maximize water, slush and snow evacuation without compromising ride comfort.

Key line: WinterCommand® Ultra

WEAR GAUGE®



Built-in wear gauges allow for convenient and easy tread-depth readings so you can check wear of your tires at any time.

Key line: Assurance® MaxLife®

WRAPAROUND TREAD



Hardworking wraparound tread helps to deliver sidewall traction in deep mud, sand and rocks.

Key line: Wrangler MT/R® with Kevlar®

30-DAY GOODYEAR® PLEDGE – LOVE 'EM OR LEAVE 'EM!

30-Day Goodyear Pledge – Love 'Em or Leave 'Em!

We want your customers to be 100% in love with their new Goodyear tires! That's why we're backing their purchase with our 30-Day Goodyear Pledge. They'll have up to a month to decide if they want to keep their Goodyear tires or exchange them for a different set of Goodyear tires at no cost to them!

Customers can bring their tires and original sales receipt to your Goodyear Store within 30 days of their purchase. The exchanged Goodyear tires will be removed, and replacement Goodyear tires will be mounted and balanced at no cost to them. Certain conditions and limitations apply.*

Confidence for Your Customers!

Your customers can have peace of mind knowing that the Goodyear tires they have selected feature innovative technology. In fact, we think they'll love their new Goodyear tires so much, we're backing them with our 30-Day Goodyear Pledge!

Eligible Tire Lines:

- Assurance ComfortDrive™
- Assurance® ComforTred® Touring
- Assurance WeatherReady®
- Assurance MaxLife®
- Eagle Exhilarate®
- Eagle® F1 SuperCar® 3
- Eagle® F1 Asymmetric All-Season
- Eagle® F1 Asymmetric 3
- Eagle® F1 Asymmetric 2
- Eagle® F1 Asymmetric
- Eagle® Sport All-Season
- Wrangler® All-Terrain Adventure with Kevlar®
- Wrangler DuraTrac®
- Wrangler Fortitude HT®
- Wrangler® Workhorse® AT
- Wrangler® Workhorse® HT
- Wrangler® Workhorse® RT
- Wrangler TrailRunner AT®
- WinterCommand®
- WinterCommand® Ultra

Limitations and Requirements

- Tires must be returned undamaged. Tires that are damaged due to misuse, road hazards, mechanical problems related to the vehicle, use in any racing-related activities or competitive events, or tires that are removed from the original vehicle are excluded from this trial period and exchanges do not apply.
- If the exchange is for a more expensive tire, the customer pays the difference (including sales tax). Likewise, if the exchange is for a less expensive tire, the customer must be refunded the difference. Mounting and balancing are included.
- Exchanges are for another Goodyear tire.
- Only the tires originally purchased are covered. The replacement tires are not covered by the 30-Day Pledge.
- Customer must return to the location that sold the tires for the exchange.
- Customer must present the original sales receipt.

Claim Processing Instructions for Dealers

- Mark the removal reason on the product adjustment claim form as “30-Day Goodyear Pledge – Love 'Em or Leave 'Em!” If you use GBMS to input your adjustments, enter condition code GG followed by a space and “30-Day Goodyear Pledge – Love 'Em or Leave 'Em!” for the tire condition.
- IMPORTANT: Record the date of the original tire purchase on the claim form.
- Return the tires to your designated Product Services Center with your next shipment of adjustment tires.
- For complete claim processing instructions, refer to 30-Day Trial Product Service Bulletin on Tire-HQ™.
- If you have questions, contact the Goodyear Customer Assistance Center at 1-800-321-2136 U.S., 1-800-387-3288 Canada.



*This program can be changed, modified or canceled at any time at Goodyear's discretion without advance notice.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

PERFORMANCE



Eagle® F1 SuperCar® 3R	Eagle® F1 SuperCar® 3	Eagle Exhilarate®	Eagle® Sport All-Season	Eagle RS-A®	Eagle® Touring
A Track-Ready Tire Providing Superior Grip and Control	For Those Who Are Inspired to Paint Every Road and Sculpt Every Turn Like Never Before	For Those Who View Every Drive as a Chance to Perform at Their Peak	Enhanced Responsive Handling and Strong Grip in All Seasons	Quality Performance for All Seasons	Confident Handling and a Smooth, Quiet Ride for Luxury Performance

		Wet Traction	Dry Traction	Snow Traction	Responsiveness	Ride Comfort
SUMMER	Eagle F1 SuperCar 3R	N/A	10	N/A	10	5
	Eagle F1 SuperCar 3	10	10	N/A	9	6
ALL-SEASON	Eagle Exhilarate	10	9	7	9	8
	Eagle Sport All-Season	8	7	8	8	8
	Eagle RS-A	8	7	6	8	8
	Eagle Touring	7	8	7	7	9

NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each product category. However, using the scale to distinguish between tires across different types of product categories would be misleading.

PERFORMANCE TIRE SELECTOR CHART

PERFORMANCE

	ALL-SEASON UHP	ALL-SEASON SPORT/TOURING	SUMMER UHP
	Eagle® Exhilarate® (Pg. 18)		
	Eagle® F1 Asymmetric All-Season (Pg. 20)		
	Eagle® F1 Asymmetric All-Season ROF (Pg. 20)		
	Eagle® F1 Asymmetric All-Season with SoundComfort Technology® (Pg. 20)		
	Eagle® Sport All-Season (Pg. 22)		
	Eagle® Sport All-Season ROF (Pg. 22)		
	Eagle® Sport All-Season SCT (Pg. 22)		
	Eagle® RS-A® Eagle® RS-A® Police Eagle® RS-A® EMT Eagle® RS-A2 (Pg. 24)		
	Eagle® Touring Eagle® Touring with SoundComfort Technology® (Pg. 28)		
	Eagle® Enforcer (Pg. 28)		
	Eagle® LS (Pg. 30)		
	Eagle® LS-2 (Pg. 30)		
	Eagle® LS-2 ROF (Pg. 30)		
	Eagle® Enforcer A/M (Pg. 32)		
	Eagle® CT® II (Pg. 33)		
	Eagle® F1 Asymmetric SUV AT (Pg. 34)		
	Eagle® F1 Asymmetric 5 (Pg. 35)		
	Eagle® F1 SuperCar® 3R Eagle® F1 SuperCar® 3M ROF (Pg. 36)		
	Eagle® F1 SuperCar® 3 Eagle® F1 SuperCar® 3 ROF (Pg. 36)		
	Eagle® F1 SuperCar® G-2 ROF (Pg. 40)		
	Eagle® F1 SuperCar® (Pg. 40)		
	Eagle® F1 SuperCar® EMT (Pg. 40)		
	Eagle® F1 SuperSport (Pg. 42)		
	Eagle® F1 Asymmetric 3 (Pg. 44)		
	Eagle® F1 Asymmetric 3 SUV (Pg. 44)		
	Eagle® F1 Asymmetric 3 ROF (Pg. 44)		
	Eagle® F1 Asymmetric 3 with SCT (Pg. 44)		
	Eagle® F1 Asymmetric 3 ROF/SCT (Pg. 44)		
	Eagle® F1 Asymmetric 2 Eagle® F1 Asymmetric 2 SUV (Pg. 46)		
	Eagle® F1 Asymmetric 2 ROF Eagle® F1 Asymmetric 2 ROF with SCT (Pg. 46)		
	Eagle® F1 Asymmetric Eagle® F1 Asymmetric ROF (Pg. 48)		
	Eagle® F1 Asymmetric SUV Eagle® F1 Asymmetric SUV AT (Pg. 48)		
	Eagle® F1 GS-2 EMT (Pg. 48)		
	Eagle® F1 GS EMT (Pg. 49)		
	Eagle® NCT® 5 EMT/ROF (Pg. 50)		
	Excellence® (Pg. 51)		
	Excellence® ROF (Pg. 51)		
	EfficientGrip™ (Pg. 52)		
	EfficientGrip™ ROF Efficient Grip ROF with SCT (Pg. 52)		
	EfficientGrip™ Performance ROF (Pg. 52)		
	EfficientGrip™ Performance (Pg. 52)		
225/40ZR18	92Y		
225/45R18		95W	
225/50R18	95Y		
225/50R18		95V	
225/50ZR18	95W		
225/55R18		98V	
225/60R18		100V	
235/40R18		91W, 95W	
235/40ZR18	95Y		
235/45R18		94V	
235/45ZR18		98V	
235/50R18	97W	97V	
235/55R18		99W	
235/60R18		100H	
235/65R18		107V	103V
245/35R18			
245/35ZR18	92Y		
245/40R18		93W	
245/40ZR18	97Y		
245/45R18		96W, 100H	
245/45ZR18	100Y	100H	
245/50R18		96V	
245/55R18		100V	
255/35R18		103V	
255/35ZR18	94Y	94W	
255/35ZR18	94Y		
255/40ZR18	99Y		99Y
255/40R18		99W	
255/45R18			94Y
255/45ZR18			103Y
255/55R18		109V	99W
255/60R18		108H, 108W	
265/35R18		108H	108V
265/35ZR18		108V	112W
265/40ZR18			
265/45ZR18			
265/45R18		109H, 109V	
275/35R18		109H	
275/35ZR18	95Y		97Y
275/40R18			
275/40ZR18	99Y		97Y
275/45ZR18			
285/30ZR18			
285/35ZR18		93Y	
285/40ZR18			
295/30ZR18			96W
295/35ZR18			98Y
225/35R19			91Y
225/40R19			88Y
225/40ZR19	93Y		93Y
225/45ZR19	96W		
225/55R19		103H	
235/35R19			91Y
235/35ZR19	91Y		91Y

*Discontinued in 2020

PERFORMANCE TIRE SELECTOR CHART

PERFORMANCE

	ALL-SEASON UHP	ALL-SEASON SPORT/TOURING	SUMMER UHP
	Eagle® Exhilarate® (Pg. 18)		
	Eagle® F1 Asymmetric All-Season (Pg. 20)		
	Eagle® F1 Asymmetric All-Season ROF (Pg. 20)		
	Eagle® F1 Asymmetric All-Season with SoundComfort Technology® (Pg. 20)		
	Eagle® Sport All-Season (Pg. 22)		
	Eagle® Sport All-Season ROF (Pg. 22)		
	Eagle® Sport All-Season SCT (Pg. 22)		
	Eagle® RS-A® Eagle® RS-A® Police Eagle® RS-A® EMT Eagle® RS-A2 (Pg. 24)		
	Eagle® Touring Eagle® Touring with SoundComfort Technology® (Pg. 26)		
	Eagle® Enforcer (Pg. 28)		
	Eagle® LS (Pg. 30)		
	Eagle® LS-2 (Pg. 30)		
	Eagle® LS-2 ROF (Pg. 30)		
	Eagle® Enforcer A/M (Pg. 32)		
	Eagle® G1® II (Pg. 33)		
	Eagle® F1 Asymmetric SUV AT (Pg. 34)		
	Eagle® F1 Asymmetric 5 (Pg. 35)		
	Eagle® F1 SuperCar® 3R Eagle® F1 SuperCar® 3M ROF (Pg. 36)		
	Eagle® F1 SuperCar® 3 Eagle® F1 SuperCar® 3 ROF (Pg. 36)		
	Eagle® F1 SuperCar® G-2 ROF (Pg. 40)		
	Eagle® F1 SuperCar® (Pg. 40)		
	Eagle® F1 SuperCar® EMT (Pg. 40)		
	Eagle® F1 SuperSport (Pg. 42)		
	Eagle® F1 Asymmetric 3 (Pg. 44)		
	Eagle® F1 Asymmetric 3 SUV (Pg. 44)		
	Eagle® F1 Asymmetric 3 ROF (Pg. 44)		
	Eagle® F1 Asymmetric 3 with SCT (Pg. 44)		
	Eagle® F1 Asymmetric 3 ROF/SCT (Pg. 44)		
	Eagle® F1 Asymmetric 2 Eagle® F1 Asymmetric 2 SUV (Pg. 46)		
	Eagle® F1 Asymmetric 2 ROF Eagle® F1 Asymmetric 2 ROF with SCT (Pg. 46)		
	Eagle® F1 Asymmetric Eagle® F1 Asymmetric ROF (Pg. 48)		
	Eagle® F1 Asymmetric SUV Eagle® F1 Asymmetric SUV AT (Pg. 48)		
	Eagle® F1 GS-2 EMT (Pg. 48)		
	Eagle® F1 GS EMT (Pg. 49)		
	Eagle® NCT® 5 EMT/ROF (Pg. 50)		
	Excellence® (Pg. 51)		
	Excellence® ROF (Pg. 51)		
	EfficientGrip™ (Pg. 52)		
	EfficientGrip™ ROF Efficient Grip ROF with SCT (Pg. 52)		
	EfficientGrip™ Performance ROF (Pg. 52)		
	EfficientGrip™ Performance (Pg. 52)		
245/40ZR20	99Y		
245/45R20		103W	99V
245/45ZR20	103Y		99Y
245/50R20		102V, 105V	102H
255/35ZR20		97W	
255/35R20			
255/40R20			101W
255/40ZR20			97Y
255/45R20		101W	101Y
255/45ZR20		105V	*101V, *101W
255/50R20		109H, 109V	104V
255/55R20		107H	*109W, 110W, 110Y
265/35R20	99W		
265/35ZR20	99Y		
265/40R20		104H	104H
265/45R20			104V
265/50R20		*106V	
275/30R20			
275/30ZR20	97Y		
275/35R20			
275/35ZR20	102Y		
275/40R20		106W	
275/40ZR20	106Y		
275/45R20			110V
275/45ZR20	110Y		106V
275/50R20			109H
275/55R20		117V	113V
285/30ZR20			111S
285/35ZR20			95Y
285/40R20		108V	104W
285/45R20		112H	
285/50R20			111H
295/30ZR20			101Y
295/40R20		106V	
305/30ZR20			103Y
305/35ZR20			99(Y), 104Y
305/50R20			*120H
335/25ZR20			99Y
245/45R21			104W
255/50R21			
265/45R21			108H
275/45R21			110W
285/40R21			
285/45R21			109Y
305/30ZR21			104Y
315/30ZR21			105Y
255/35R22			99W
265/35R22			102W
275/40R22		107W	102W
285/35R22			102W
285/45R22	110H	114H	
295/40R22			112W

*Discontinued in 2020


EAGLE EXHILARATE®

For Those Who View Every Drive as a Chance to Perform at Their Peak



FEATURES	BENEFITS
1. ActiveBraking Technology	Promotes shorter braking distances on wet and dry roads
2. ActiveGrip Technology	Offers excellent traction in all seasons for performance handling
3. Wear Gauge®	A tool to make it easier to track tread depth and vehicle alignment
4. ActiveStrength Technology™	A stronger, lightweight construction for enhanced handling and responsiveness
5. Enhanced rim protector	Helps to protect wheels from accidental curb damage

PERFORMANCE RATINGS

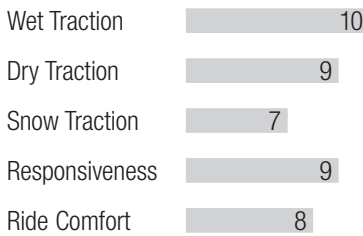

45000*
MILE TREAD LIFE LIMITED WARRANTY

75,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



* On vehicles with different front and rear tire sizes, the rear tires will have a 22,500 mile/37,500 kilometre tread life limited warranty. See warranty brochure for complete details.

EAGLE EXHILARATE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
215/45ZR17	91W	XL	VS	104001568	236254	7.0 - 8.0	7.0	8.4	24.7	1,356	10	848	500 AA A
225/45ZR17	94W	XL	VS	104004568	236257	7.0 - 8.5	7.5	8.9	25.0	1,477	10	837	500 AA A
245/45ZR17	99Y	XL	VS	104014568	236269	7.5 - 9.0	8.0	9.6	25.7	1,709	10	814	500 AA A
225/40ZR18	92Y	XL	VS	104002568	236255	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	500 AA A
225/45ZR18	95Y	XL	VS	104005568	236258	7.0 - 8.5	7.5	8.9	25.9	1,521	10	806	500 AA A
225/50ZR18	95W	SL	VS	104007568	236260	6.0 - 8.0	7.0	9.2	26.9	1,521	10	777	500 AA A
235/40ZR18	95Y	XL	VS	104009568	236262	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	500 AA A
245/35ZR18	92Y	XL	VS	104010568	236264	8.0 - 9.5	8.5	9.8	24.8	1,389	10	844	500 AA A
245/40ZR18	97Y	XL	VS	104011568	236266	8.0 - 9.5	8.5	9.8	25.7	1,609	10	813	500 AA A
245/45ZR18	100Y	XL	VS	104015568	236270	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	500 AA A
255/35ZR18	94Y	XL	VS	104018568	236273	8.5 - 10	9.0	10.2	25.0	1,477	10	836	500 AA A
255/40ZR18	99Y	XL	VS	104020568	236275	8.5 - 10	9.0	10.2	26.0	1,709	10	803	500 AA A
275/35ZR18	95Y	SL	VS	104027568	236282	9.0 - 11.0	9.5	10.8	25.6	1,521	10	818	500 AA A
275/40ZR18	99Y	SL	VS	104028568	236283	9.0 - 11.0	9.5	10.9	26.7	1,709	10	784	500 AA A
225/40ZR19	93Y	XL	VS	104003568	236256	7.5 - 9.0	8.0	9.1	26.1	1,433	10	801	500 AA A
225/45ZR19	96W	XL	VS	104006568	236259	7.0 - 8.5	7.5	8.9	27.0	1,565	10	775	500 AA A
235/35ZR19	91Y	XL	VS	104008568	236261	8.0 - 9.5	8.5	9.5	25.5	1,356	10	821	500 AA A
235/40ZR19	96Y	XL	VS	104033568	236299	8.0 - 9.5	8.5	9.5	26.4	1,565	10	791	500 AA A
245/35ZR19	93Y	XL	VS	104036568	236470	8.0 - 9.5	8.5	9.8	25.8	1,433	10	810	500 AA A
245/40ZR19	98Y	XL	VS	104012568	236267	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	500 AA A
245/45ZR19	102Y	XL	VS	104016568	236271	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755	500 AA A
245/50ZR19	105W	XL	VS	104039568	237477	7.0 - 8.5	7.5	10.0	28.7	2,039	10	728	500 AA A
255/35ZR19	96Y	XL	VS	104019568	236274	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	500 AA A
255/40ZR19	100Y	XL	VS	104021568	236276	8.5 - 10.0	9.0	10.2	27.1	1,764	10	773	500 AA A
255/45ZR19	104Y	XL	VS	104022568	236277	8.0 - 9.5	8.5	10.0	28.1	1,984	10	745	500 AA A
255/50ZR19	107W	XL	VS	104023568	236278	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	500 AA A
265/35ZR19	98Y	XL	VS	104024568	236279	9.0 - 10.5	9.5	10.7	26.3	1,653	10	793	500 AA A
275/35ZR19	100Y	XL	VS	104034568	236300	9.0 - 11.0	9.5	10.9	26.6	1,764	10	787	500 AA A
285/35ZR19	99Y	SL	VS	104032568	236286	9.5 - 11.0	10.0	11.4	26.9	1,709	10	777	500 AA A
245/40ZR20	99Y	XL	VS	104013568	236268	8.0 - 9.5	8.5	9.8	27.7	1,709	10	754	500 AA A
245/45ZR20	103Y	XL	VS	104017568	236272	7.5 - 9.0	8.0	9.6	28.7	1,929	10	729	500 AA A
265/35ZR20	99Y	XL	VS	104025568	236280	9.0 - 10.5	9.5	10.7	27.3	1,709	10	765	500 AA A
275/30ZR20	97Y	XL	VS	104026568	236281	9.0 - 10.5	9.5	10.9	26.5	1,609	10	788	500 AA A
275/35ZR20	102Y	XL	VS	104035568	236301	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	500 AA A
275/40ZR20	106Y	XL	VS	104029568	236284	9.0 - 11.0	9.5	10.9	28.7	2,094	10	729	500 AA A
275/45ZR20	110Y	XL	VS	104030568	236285	8.5 - 10.0	9.0	10.8	29.8	2,337	10	702	500 AA A

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 ASYMMETRIC ALL-SEASON

(Select sizes with ROF/SoundComfort Technology®)

An Ultra High-Performance Tire with Superior Responsiveness and Expert Handling in All Seasons – Dry, Wet and Snow



FEATURES BENEFITS

1. Proven asymmetric tread	For precise, race-inspired handling on wet or dry roads
2. Dry Handling Zone	With powerful tread blocks puts more rubber on the road for superb dry traction and handling
3. All-Season Zone	Helps push water and slush away from the tread for enhanced all-season traction
4. Specialized tread compound	Offers enhanced wet and dry traction in any season
5. TredLock Technology	Microgrooves help provide biting edges for enhanced wet traction and lock together for confident grip in turns

45000*
MILE TREAD LIFE
LIMITED WARRANTY

75,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



All-Season



Dry Traction



Ultra Wet
Traction



Cornering
Stability



Steering
Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

* On vehicles with different front and rear tire sizes, the rear tires will have a 22,500 mile/37,500 kilometre tread life limited warranty. See warranty brochure for complete details.

EAGLE F1 ASYMMETRIC ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/50R18	97W	SL	VSB	104207357	223141	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	500 AA A	FORD MUSTANG (15-21), LINCOLN CONTINENTAL (17-20)
235/40R19	96W	XL	VSB	104504357	227763	8.0 - 9.5	8.5	9.5	26.4	1,565	10	791	500 AA A	FORD FUSION SPORT: 17-20
245/40R19	94W	SL	VSB	104388357	226602	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 AA A	NISSAN MAXIMA: 16-21
245/40R20	99W	XL	VSB	104433357	225276	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	500 AA A	
265/35R20	99W	XL	VSB	104436357	226572	9.0 - 10.5	9.5	10.7	27.3	1,709	9	765	500 AA A	FORD MUSTANG: 17-21
EAGLE F1 ASYMMETRIC ALL-SEASON ROF														
245/40R20	95V	SL	VSB	104040390	240105	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 AA A	CHEVROLET CAMARO 2LT (16-21)
EAGLE F1 ASYMMETRIC ALL-SEASON SCT (SOUND COMFORT TECHNOLOGY)														
245/40R20	99W	XL	VSB	104433393	230945	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 AA A	LINCOLN CONTINENTAL: 17-19

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

EAGLE® SPORT ALL-SEASON

(Select sizes with ROF/SoundComfort Technology®)

A Powerful Sport Performance Tire with Enhanced Responsive Handling and Strong Grip in All-Season Conditions



FEATURES	BENEFITS
1. Proven tread pattern	Offers both responsive handling and exceptional all-season grip
2. Innovative tread compound	Offers outstanding wet and dry performance, with enhanced grip in ice and snow
3. Full-depth sipes	Offer biting edges for confident grip as the tire wears
4. Rim protector	Helps protect wheels against accidental curb damage

PERFORMANCE RATINGS

Wet Traction	8
Dry Traction	7
Snow Traction	8
Responsiveness	8
Ride Comfort	8

50000*
MILE TREAD LIFE
LIMITED WARRANTY

80,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



SCAN HERE FOR PRODUCT VIDEO



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

ALL-SEASON SPORT/TOURING

PERFORMANCE

EAGLE SPORT ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 195/55R15	85V	SL	FSB	109911366	222192	5.5 - 7	6.0	7.9	23.4	1,135	10	892	560 A A	
* 195/60R15	88V	SL	FSB	109848366	222124	5.5 - 7	6.0	7.9	24.2	1,235	10	864	560 A A	
* 195/65R15	91V	SL	FSB	109174366	222128	5.5 - 7	6.0	7.9	25.0	1,356	10	836	560 A A	
* 195/55R16	87V	SL	FSB	109032366	222193	5.5 - 7	6.0	7.9	24.4	1,201	10	856	560 A A	
205/55R16	91V	SL	FSB	109907366	222123	5.5 - 7.5	6.5	8.4	24.9	1,356	10	840	560 A A	
* 205/60R16	92V	SL	FSB	109910366	222127	5.5 - 7.5	6.0	8.2	25.7	1,389	10	816	560 A A	
215/55R16	93V	SL	FSB	109887366	222179	6 - 7.5	7.0	8.9	25.3	1,433	10	827	560 A A	
225/50R16	92V	SL	FSB	109035366	222194	6 - 8	7.0	9.2	24.9	1,389	10	839	560 A A	
225/55R16	95V	SL	FSB	109485366	222188	6 - 8	7.0	9.2	25.8	1,521	10	812	560 A A	
205/45R17	88V	XL	FSB	109136366	222201	6.5 - 7.5	7.0	8.1	24.3	1,235	10	862	560 A A	
205/50R17	93V	XL	FSB	109576366	222180	5.5 - 7.5	6.5	8.4	25.1	1,433	10	832	560 A A	
215/45R17	91W	XL	FSB	109053366	222175	7 - 8	7.0	8.4	24.7	1,356	10	846	560 A A	
225/45R17	94W	XL	FSB	109044366	222129	7 - 8.5	7.5	8.9	25.0	1,477	10	837	560 A A	
225/50R17	94W	SL	FSB	109083366	222173	6 - 8	7.0	9.2	25.9	1,477	10	807	560 A A	
235/45R17	94W	SL	FSB	109270366	222171	7.5 - 9	8.0	9.3	25.4	1,477	10	824	560 A A	
235/50R17	96W	SL	FSB	109064366	222199	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	560 A A	FORD POLICE RESPONDER HYBRID (19-20)
245/40R17	91W	SL	FSB	109060366	222195	8 - 9.5	8.5	9.8	24.7	1,356	10	845	560 A A	
255/40R17	94W	SL	FSB	109075366	222207	8.5 - 10	9.0	10.3	25.0	1,477	10	836	560 A A	
215/45R18	93W	XL	FSB	109065366	222202	7 - 8	7.0	8.4	25.6	1,433	10	815	560 A A	
225/40R18	92W	XL	FSB	109055366	222183	7.5 - 9	8.0	9.1	25.1	1,389	10	833	560 A A	
225/45R18	95W	XL	FSB	109058366	222191	7 - 8.5	7.5	8.9	25.9	1,521	10	806	560 A A	
225/55R18	98V	SL	BLT	109086382	228531	6 - 8	7.0	9.2	27.8	1,653	10	753	560 A A	JEEP RENEGADE (15-21)
225/60R18	100V	SL	FSB	109132366	222182	6 - 8	6.5	9.0	28.6	1,764	10	731	560 A A	
235/40R18	95W	XL	FSB	109063366	222198	8 - 9.5	8.5	9.5	25.4	1,521	10	823	560 A A	
235/40R18	91W	SL	FSB	109104366	226644	8 - 9.5	8.5	9.5	25.4	1,356	9	823	560 A A	HONDA CIVIC (17-21)
235/45R18	94V	SL	FSB	109084366	224905	7.5 - 9	8.0	9.3	26.3	1,477	10	794	560 A A	
235/50R18	97V	SL	FSB	109087366	225218	6.5 - 8.5	7.5	9.7	27.3	1,609	9	766	560 A A	CADILLAC CT6 (17-20)
235/55R18	100H	SL	BLT	109149569	237641	6.5 - 8.5	7.5	9.7	28.2	1,764	10	739	560 A A	AUDI Q3 (19-21)
235/60R18	107V	XL	FSB	109133366	222187	6.5 - 8.5	7.0	9.5	29.1	2,149	11	718	560 A A	
245/40R18	93W	SL	FSB	109057366	222185	8 - 9.5	8.5	9.8	25.7	1,433	10	813	560 A A	
245/45R18	96W	SL	FSB	109056366	222184	7.5 - 9	8.0	9.6	26.7	1,565	10	784	560 A A	
245/45R18	100H	XL	BLT	109093382	230774	7.5 - 9	8.0	9.6	26.7	1,764	10	784	560 A A	JAGUAR XF (16-20)
245/50R18	100V	SL	FSB	109089366	225688	7 - 8.5	7.5	10.0	27.7	1,764	10	755	560 A A	CHEVROLET CAMARO (16-21)
255/35R18	94W	XL	FSB	109080366	223674	8.5 - 10	9.0	10.2	25.0	1,477	10	836	560 A A	
255/40R18	99W	XL	FSB	109072366	222205	8.5 - 10	9.0	10.2	26.0	1,709	10	803	560 A A	
255/55R18	109V	XL	FSB	109123366	232974	7 - 9	8.0	10.4	29.0	2,271	11	720	560 A A	
255/60R18	108H	SL	BLT	109099382	231110	7 - 9	7.5	10.2	30.0	2,205	10	696	560 A A	AUDI Q7 (16-19)
255/60R18	108W	SL	BLT	109106399	231878	7 - 9	7.5	10.2	30.0	2,205	10	696	560 A A	MASERATI LEVANTE (17-20)
265/45R18	101V	SL	FSB	109098366	225214	8.5 - 10	9.0	10.5	27.4	1,819	10	764	560 A A	CADILLAC CT6 (17-18)
235/50R19	99H	SL	BLT	109152569	237642	6.5 - 8.5	7.5	9.6	28.3	1,709	10	739	560 A A	AUDI Q3 (19-21)
245/40R19	94W	SL	FSB	109077366	223671	8 - 9.5	8.5	9.8	26.7	1,477	10	782	560 A A	
245/55R19	103V	SL	FSB	109113366	232975	7 - 8.5	7.5	10.0	29.7	1,929	11	705	560 A A	
255/35R19	96W	XL	FSB	109074366	222206	8.5 - 10	9.0	10.2	26.0	1,565	10	803	560 A A	
255/45R19	104H	XL	BLT	109128569	237354	8.5 - 9.5	8.0	10.0	28.1	1,984	10	745	560 A A	
255/50R19	107V	XL	FSB	109020366	232976	7 - 9	8.0	10.4	29.1	2,149	11	718	560 A A	
255/60R19	109H	SL	FSB	109110366	232972	7 - 9	7.5	10.2	31.1	2,271	11	673	560 A A	
265/50R19	110W	XL	BLT	109146399	236363	7.5 - 9.5	8.5	10.9	29.5	2,337	9	709	560 A A	MASERATI LEVANTE (17-20)
235/55R20	102V	SL	FSB	109100366	231498	6.5 - 8.5	7.5	9.7	30.2	1,874	10	693	560 A A	
245/35R20	95W	XL	FSB	109066366	222203	8 - 9.5	8.5	9.8	26.8	1,521	10	781	560 A A	
245/45R20	103W	XL	FSB	109069366	222204	7.5 - 9	8.0	9.6	28.7	1,929	10	729	560 A A	
245/50R20	105V	XL	BLT	109142557	236351	7 - 8.5	7.5	10.0	29.7	2,039	9	704	560 A A	JAGUAR I-PACE (18-20)
245/50R20	102V	SL	FSB	109111366	232973	7 - 8.5	7.5	10.0	29.7	1,874	11	704	560 A A	
255/35R20	97W	XL	FSB	109081366	223675	8.5 - 10	9.0	10.2	27.0	1,609	10	774	560 A A	
255/45R20	101W	SL	FSB	109082366	223676	8 - 9.5	8.5	10.0	29.1	1,819	11	719	560 A A	
255/50R20	109V	XL	FSB	109108366	232971	7 - 9	8.0	10.4	30.1	2,271	11	695	560 A A	
255/50R20	109H	XL	BLT	109147557	237613	8 - 9	8.0	10.4	30.1	2,271	10	695	561 A A	AUDI E-TRON / E-TRON SPORTBACK (19-21)
255/55R20	107H	SL	FSB	109114366	232977	7 - 9	8.0	10.4	31.0	2,149	11	695	560 A A	
265/40R20	104H	XL	BLT	109139569	237355	9 - 10.5	9.5	10.7	28.4	1,984	10	737	560 A A	
275/40R20	106W	XL	FSB	109062366	222196	9 - 11	9.5	10.9	28.7	2,094	11	729	560 A A	
275/55R20	117V	XL	FSB	109138366	222189	7.5 - 9.5	8.5	11.2	31.9	2,833	11	655	560 A A	
285/45R22	110H	SL	FSB	109115366	232979	9 - 10.5	9.5	11.2	32.1	2,337	11	651	560 A A	
EAGLE SPORT ALL-SEASON ROF														
225/55R17	97H	SL	BLT	109143395	236354	6.0 - 8.0	7.0	9.2	26.8	1,609	11	780	560 A A	BMW 5 SERIES (G30): 17-21, MERCEDES BENZ E-CLASS: 17-21
225/50R18	95V	SL	BLT	109092395	230505	6.0 - 8.0	7.0	9.2	26.9	1,521	11	777	400 A A	BMW X1: 17-1
235/60R18	103V	SL	BLT	109125382	234689	6.5 - 8.5	7.0	9.5	29.1	1,929	9	718	560 A A	
245/45R18	100H	XL	BLT	109093395	235824	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	400 A A	BMW 5 SERIES (G30): 17-21, MERCEDES BENZ E-CLASS: 17-21
245/40R19	98H	XL	BLT	109140395	235948	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	400 A A	BMW 5 SERIES (G30): 17-21, MERCEDES BENZ E-CLASS: 17-21
255/55R19	111H	XL	BLT	109097395	230923	7.0 - 9.0	8.0	10.4	30.0	2,403	10	697	560 A A	AUDI Q7: 16-19
255/45R20	105V	XL	BLT	109101395	231456	8.0 - 9.5	8.5	10.0	29.1	2,039	10	719	560 A A	MERCEDES-BENZ GLC-CLASS (16-21)
285/40R20	108H	XL	BLT	109102395	231457	9.5 - 11.0	10.0	11.4	29.0	2,205	10	721	560 A A	MERCEDES-BENZ GLC-CLASS (16-21)
* 285/45R20	112H	XL	BLT	109096395	230922	9.0 - 10.5	9.5	9.5	30.1	2,469	11	694	560 A A	AUDI Q7: 16-19
EAGLE SPORT ALL-SEASON SCT														
255/45R19	104H	XL	BLT	109128382	234733	8.0 - 9.5	8.5	10.0	28.1	1,984	10	745	560 A A	AUDI A8: 18-21
265/40R20	104H	XL	BLT	109139366	235155	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737	560 A A	AUDI A8: 18-21

*Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

EAGLE RS-A®

(Select sizes with EMT)

A Quality Performance Tire for All-Season Traction in Dry, Wet and Snowy Conditions




FEATURES

1. Unique asymmetric tread design
2. Aggressive shoulder tread blocks and wide lateral grooves

BENEFITS

- Helps provide enhanced traction, superb cornering and a quiet ride
- Offer confident handling in wet, dry or snowy conditions

PERFORMANCE RATINGS

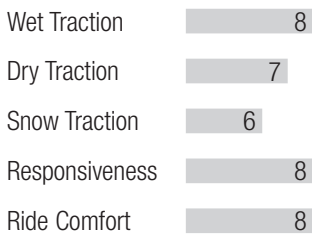

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

ALL-SEASON SPORT/TOURING

PERFORMANCE

EAGLE RS-A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
195/60R15	88H	SL	VSB	732401500	214321	5.5 - 7.0	6.0	7.9	24.2	1,234	10	864	260 A A	
P205/55R16	89H	SL	VSB	732170500	195751	5.5 - 7.5	6.5	8.4	24.9	1,279	11	840	260 A A	HONDA CIVIC (13-15)
P205/55R16	89H	SL	VSB	732674500	204489	5.5 - 7.5	6.5	8.4	24.9	1,279	11	840	260 A A	SCION XB (13-15), TOYOTA COROLLA (13-16), TOYOTA MATRIX (13-13)
P215/45R17	87W	SL	VSB	732682500	204491	7.0 - 8.0	7.0	8.4	24.7	1,201	11	848	260 A A	TOYOTA COROLLA (13-13), TOYOTA MATRIX (13-13)
P215/55R17	93V	SL	VSB	732262500	217743	6.0 - 7.5	7.0	8.9	26.3	1,433	10	795	260 A A	NISSAN JUKE (13-17)
* P225/55R17	95V	SL	VSB	732941500	202674	6.0 - 8.0	7.0	9.2	26.8	1,521	10	781	260 A A	INFINITI G25 (13-17)
P275/60R17	110H	SL	VSB	732372500	187327	7.5 - 9.5	8.0	11.0	30.0	2,337	12	697	260 A A	CHRYSLER ASPEN (06-09), DODGE DURANGO (04-09), DAKOTA (04-08)
P225/45R18	91V	SL	VSB	732646500	203939	7.0 - 8.5	7.5	8.9	25.9	1,356	11	806	260 A A	FORD FUSION (08-12), LINCOLN MKZ(10-12), MERCURY MILAN (10-11)
235/55R18	100V	SL	VSB	732222500	230749	6.5 - 8.5	7.5	9.7	28.2	1,764	10	742	260 A A	TOYOTA SIENNA (13-20)
P245/45R18	96V	SL	VSB	732279438	200293	7.5 - 9.0	8.0	9.6	26.7	1,565	10	784	260 A A	NISSAN MAXIMA (13-15)
255/45R19	100V	SL	VSB	732016500	218968	8.0 - 9.5	8.5	10.0	28.1	1,764	10	745	260 A A	FORD TAURUS (13-19)
P255/60R19	108H	SL	VSB	732587500	199486	7.0 - 9.0	7.5	10.2	31.1	2,205	11	673	260 A A	BUICK ENCLAVE (13-17), GMC ACADIA (13-17)
245/45R20	99V	SL	VSB	732603500	201292	7.5 - 9.0	8.0	9.6	28.7	1,709	11	729	260 A A	CHRYSLER 300 (09-10), DODGE CHALLENGER (09-10), CHARGER (07-10)
P245/50R20	102H	SL	VSB	732899500	206589	7.0 - 8.5	7.5	10.0	29.7	1,874	10	704	260 A A	TOYOTA VENZA (13-15)
255/45R20	101V	SL	BSL	732007741	218966	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	260 A A	ACURA RDX (19-21), LINCOLN MKT (13-19)
P255/50R20	104V	SL	VSB	732550500	196404	7.0 - 9.0	8.0	10.9	30.1	1,984	10	695	260 A A	CADILLAC SRX (06-09), CHEVROLET TRAILBLAZER (06-09), SAAB 9-7X (08-09)
* P265/50R20	106V	SL	VSB	732278500	186540	7.5 - 9.5	8.5	10.9	30.5	2,094	10	686	260 A A	INFINITI FX35 (13-14), INFINITI FX45 (13-14)
EAGLE RS-A EMT														
* 255/45R20	101W	SL	VSB	474566372	198221	8.0 - 9.5	8.5	10.0	29.1	1,819	11	719	260 A A	JEEP GRAND CHEROKEE SRT8 (06-10)
* 285/40R20	104W	SL	VSB	474566372	198223	9.5 - 11.0	10.0	11.4	29.0	1,984	12	721	260 A A	JEEP GRAND CHEROKEE SRT8 (06-10)
EAGLE RS-A POLICE														
P225/60R16	97V	SL	VSB	732354500	103103	6.0 - 8.0	6.5	9.0	26.6	1,609	12	785	260 A A	
P225/60R16	97V	SL	VSB	732354148	175293	6.0 - 8.0	6.5	9.0	26.6	1,609	11	785	340 A A	FORD CROWN VICTORIA INTERCEPTOR (04-05)
P235/55R17	98W	SL	VSB	732002500	136360	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769	260 A A	CADILLAC SEVILLE STS (04), CHEVROLET IMPALA/MONTE CARLO (05), FORD CROWN VICTORIA POLICE (06-11)
P235/55R17	98W	SL	VSB	732297500	218651	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769	260 A A	CHEVROLET IMPALA POLICE (13-17)
P265/60R17	108V	SL	VSB	732523500	231944	7.0 - 9.5	8.0	10.7	29.5	2,205	11	708	260 A A	CHEVROLET TAHOE POLICE (17-20)
P225/60R18	99W	SL	VSB	732312500	218769	6.0 - 8.0	6.5	9.0	28.6	1,709	11	730	260 A A	DODGE CHARGER POLICE (13-14), DODGE CHARGER PURSUIT (16-21)
P235/50R18	99W	XL	VSB	732276500	218197	6.5 - 8.5	7.5	9.7	27.3	1,709	11	766	260 A A	CHEVROLET CAPRICE POLICE (13-17)
245/55R18	103V	SL	VSB	732026500	222703	7.0 - 8.5	7.0	10.0	28.6	1,929	11	730	260 A A	DODGE CHARGER PURSUIT (15-21), FORD POLICE INTERCEPTOR SEDAN (13-19), FORD POLICE INTERCEPTOR UTILITY (13-19)
EAGLE RS-A2														
P245/45R19	98V	SL	VSB	107172343	216808	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	440 A A	BUICK LACROSSE (14-19), CADILLAC CTS (13-14), CADILLAC XTS (13-19), CHEVROLET IMPALA (14-19), TESLA MODEL S (13-16)
P245/45R19	98V	SL	VSB	107172552	234967	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	440 A A	
245/45ZR20	99Y	SL	VSB	107548343	218853	7.5 - 9.0	8.0	9.6	28.7	1,709	10	729	440 A A	CHRYSLER 300 (13-21), DODGE CHALLENGER SRT8 (14-21), DODGE CHARGER (14-21)

*Discontinued 2020

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.


EAGLE® TOURING

Confident Handling and a Smooth,
Quiet Ride for Luxury Performance



FEATURES	BENEFITS
1. Optimized tire contact area with the road	For enhanced handling and responsiveness
2. Biting edges	Help to provide confident all-season traction in wet, dry and snowy conditions
3. Optimized tread pattern	Helps to quiet noise from on-road driving

PERFORMANCE RATINGS

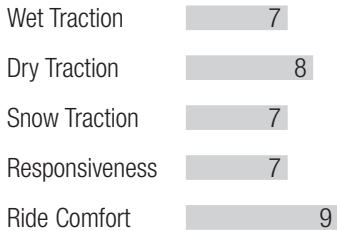

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Chosen as Original Equipment
by Global Vehicle Manufacturers

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ALL-SEASON SPORT/TOURING

PERFORMANCE

EAGLE TOURING SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/45R18	98V	XL	BLT	102964559	235479	7.5 - 9.0	8.0	9.3	26.3	1,653	10	794	500 A A	HYUNDAI KONA (18-21), KIA SOUL (19-21)
225/55R19	103H	XL	BLT	102918387	239663	6.0 - 8.0	7.0	9.1	28.7	1,929	10	728	350 A A	PORSCHE TAYCAN (20-21)
235/40R19	96V	XL	VS	102918387	230743	8.0 - 9.5	8.5	9.5	26.4	1,565	8	791	500 A A	HONDA ACCORD (18-21)
245/40R19	94W	SL	VS	102972387	233645	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 A A	
245/45R19	98V	SL	VS	102839387	225220	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	CADILLAC CT6 (17-20)
245/45R19	98W	SL	VS	102851387	231041	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	
245/45R19	98W	SL	VS	102015387	238641	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	
275/45R19	108H	XL	BLT	102021559	239664	8.5 - 10.5	9.0	10.7	28.8	2,205	10	726	350 A A	PORSCHE TAYCAN (20-21)
235/55R20	102V	SL	VS	102928387	233110	6.5 - 8.5	7.5	9.7	30.4	1,874	10	693	500 A A	TOYOTA HIGHLANDER (20-21)
245/40R20	99W	XL	VS	102997387	234794	8.0 - 9.5	8.5	9.8	27.7	1,709	10	754	500 A A	
245/40R20	95W	SL	VS	102850387	230732	8.0 - 9.5	8.5	9.8	27.7	1,521	9	754	500 A A	CADILLAC CT6 (17-20)
265/45R20	104V	SL	VS	102011387	237500	8.5 - 10	9.0	10.5	29.4	1,984	9	712	400 A A	PORSCHE MACAN (19-21)
295/40R20	106V	SL	VS	102012387	237631	10 - 11.5	10.5	11.9	29.3	2,094	9	714	400 A A	PORSCHE MACAN (19-21)
275/40R22	107W	XL	VS	102994387	232902	9.0 - 11.0	9.5	10.9	30.7	2,149	11	681	500 A A	
285/45R22	114H	XL	VS	102863387	228472	9.0 - 10.5	9.5	11.2	32.1	2,601	10	651	500 A A	RAM 1500 (18-21)
EAGLE TOURING SCT (SOUND COMFORT TECHNOLOGY)														
245/40R19	94W	SL	VS	102972396	236073	8.0 - 9.5	8.5	9.8	26.7	1,477	10	782	500 A A	NISSAN MAXIMA (19-21)
245/45R19	98W	SL	VS	102851396	231361	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	TESLA MODEL S (16-21)
245/45R19	98W	SL	VS	102015578	238703	7.5 - 9.0	8.0	9.6	27.7	1,653	9	755	500 A A	TESLA MODEL S (19-21)
245/40R20	99W	XL	VS	102003387	237458	8.0 - 9.5	8.5	9.8	27.7	1,709	10	754	500 A A	LINCOLN CONTINENTAL (19-20)
275/40R22	107W	XL	VS	102994396	236896	9.0 - 11.0	9.5	10.9	30.7	2,149	11	681	500 A A	LINCOLN AVIATOR (20-21)




EAGLE ENFORCER®

Our Latest Generation Police Pursuit Tire That Offers Strong Handling and Confident Traction in Wet and Dry Conditions



FEATURES	BENEFITS
1. Optimized sipe pattern with shoulder decoupling groove	Provides traction and handling capability in light snow
2. Large shoulder blocks	Offer law enforcement enhanced handling and steering response for high-speed pursuits
3. Wide circumferential grooves	Evacuate water for confident wet traction in demanding situations
4. Pursuit-ready all-season tread compound	Proven technology provides confidence in dry, wet and slush conditions
5. Robust tire construction	Vehicle-specific tire construction optimizes handling on the various road surfaces encountered by law enforcement

PERFORMANCE RATINGS



ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Chosen as Original Equipment by Global Vehicle Manufacturers

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ALL-SEASON SPORT/TOURING

PERFORMANCE

EAGLE ENFORCER SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/60R18	108V	SL	VSB	732005563	232702	7.0 - 9.0	7.5	10.2	30.0	2,205	10	696	420 A A	FORD POLICE INTERCEPTOR UTILITY (20-21)
275/55R20	113V	SL	VSB	732010563	240100	7.5 - 9.5	8.5	11.2	31.9	2,535	11	655	420 A A	

EAGLE® LS/LS-2

(Select sizes with R0F)

A Quality Performance Tire for a Smooth, Quiet Ride and Confident Cornering in Any Season



FEATURES	BENEFITS
1. Wide circumferential grooves	Help efficiently evacuate water from beneath the tread
2. Special tread block sequence	Helps enhance handling and traction and reduces tread noise
3. Premium sidewall styling	Contemporary appearance

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



All-Season



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

ALL-SEASON SPORT/TOURING

PERFORMANCE

EAGLE LS/LS-2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
EAGLE LS														
P235/60R17	103S	XL	XNW	706052025	130736	6.5 - 8.5	7.0	9.5	28.1	1,929	11	744	360 A B	CADILLAC DEVILLE/DTS LIMO (09-11), CADILLAC DEVILLE (04-06)
EAGLE LS-2														
P195/65R15	89S	SL	VS	706648163	204487	5.5 - 7.0	6.0	7.9	25.2	1,279	9	836	400 A B	TOYOTA COROLLA (13-13)
P205/70R16	96T	SL	VS	706611163	201952	5.0 - 7.0	6.0	8.2	27.3	1,565	11	765	400 A B	JEEP PATRIOT (13-17)
225/55R17	97H	SL	VS	706447163	222799	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	400 A A	ACURA TLX (15-20)
225/50R18	95H	SL	VS	706171163	222839	6.0 - 8.0	7.0	9.2	26.9	1,521	10	777	400 A A	ACURA TLX (15-20), SUBARU LEGACY (15-19)
225/50R18	95H	SL	VS	706171532	232661	6.0 - 8.0	7.0	9.2	26.9	1,521	10	778	400 A A	
P225/55R18	97H	SL	VS	706569163	198303	6.0 - 8.0	7.0	9.2	27.8	1,609	10	753	400 A A	HONDA ELEMENT (07-10)
235/45R18	94V	SL	VS	706038163	218855	7.5 - 9.0	8.0	9.3	26.3	1,477	10	792	400 A A	FORD FUSION (13-20), HONDA ACCORD (13-17)
235/45R18	94V	SL	VS	706588163	232316	7.5 - 9.0	8.0	9.3	26.3	1,477	10	794	400 A A	
P235/50R18	97H	SL	VS	706018163	218905	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	400 A A	BUICK LACROSSE (14-16), CHEVROLET MALIBU (13-17)
245/40R18	93H	SL	BLT	706014308	208169	8.0 - 9.5	8.5	9.8	25.7	1,433	10	813	400 A A	AUDI A5 (13-15), AUDI S5 (13-14)
245/45R18	100H	XL	BLT	706239308	217729	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	400 A A	AUDI A6 (12)
255/55R18	109H	XL	BLT	706999308	217667	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	LINCOLN MKT LIMO (13-19), VOLKSWAGEN TOUAREG (13-15)
255/55R18	109V	XL	BLT	706939308	217981	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	PORSCHE CAYENNE (13-15)
235/55R19	101V	SL	BLT	706414308	229608	6.5 - 8.5	7.5	9.7	29.2	1,819	10	717	400 A A	PORSCHE MACAN (16-19)
235/55R19	101H	SL	BLT	706356324	214734	6.5 - 8.5	7.5	9.7	29.2	1,819	10	716	400 A A	AUDI Q5 (09-10)
* 255/40R19	100H	XL	BLT	706195308	217521	8.5 - 10.0	9.0	10.2	27.0	1,764	11	773	400 A A	AUDI A7 (13-14)
* 255/50R19	103V	SL	BLT	706422308	229609	7.0 - 9.0	8.0	10.4	29.1	1,929	10	719	400 A A	PORSCHE MACAN (16-19)
265/50R19	110V	XL	BLT	706385308	228010	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	400 A A	PORSCHE CAYENNE (13-18)
275/45R20	110V	XL	BLT	706386308	228041	8.5 - 10.5	9.0	10.8	29.8	2,337	10	702	400 A A	
P275/55R20	111S	SL	BLT	706069165	193043	7.5 - 9.5	8.5	11.2	31.9	2,403	11	655	360 A B	CHEVROLET SILVERADO (13-18), GMC SIERRA (13-18)
EAGLE LS-2 ROF														
205/50R17	89H	SL	BSW	706795168	206176	5.5 - 7.5	6.5	8.4	25.1	1,279	12	833	400 A A	BMW 1 SERIES (13-14)
225/50R17	94H	SL	BLT	706567308	218704	6.0 - 8.0	7.0	9.2	25.9	1,477	10	806	400 A A	BMW X1 (13-16)
225/55R17	97V	SL	BLT	706923322	217115	6.0 - 8.0	7.0	9.2	26.8	1,609	10	781	400 A A	BMW 5 SERIES / 6 SERIES (13-16)
245/45R17	95H	SL	BLT	706578322	212679	7.5 - 9.0	8.0	9.6	25.7	1,521	10	814	400 A A	MERCEDES-BENZ E-CLASS (13-16)
245/45R18	100V	XL	BLT	706440322	230327	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	400 A A	BMW 5 SERIES / 6 SERIES (13-16)
245/50R18	100V	SL	BLT	706070322	209455	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	400 A A	BMW 7 SERIES (13-17), BMW X3 (13-17)
245/50R18	100W	SL	BLT	706088322	216489	7.0 - 8.5	7.5	10.0	27.7	1,764	10	755	400 A A	
255/55R18	109H	XL	VS	706999163	220018	7.0 - 9.0	8.0	10.4	29.0	2,271	10	720	400 A A	BMW X5 (14-18)
235/45R19	95H	SL	BLT	706377308	227808	7.5 - 9.0	8.0	9.3	27.4	1,521	10	764	400 A A	
235/45R19	95H	SL	BLT	706377575	237633	7.5 - 9.0	8.0	9.3	27.4	1,521	10	764	400 A A	JEEP RENEGADE (19-21)
* 245/40R19	98V	XL	BLT	706387322	228749	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	400 A A	BMW 5 SERIES / 6 SERIES (13-16)
245/45R19	102V	XL	BLT	706280322	218195	7.5 - 9.0	8.0	9.6	27.7	1,874	10	755	400 A A	BMW 7 SERIES (13-17), BMW X3 (13-17)
255/50R19	107H	XL	VS	706110163	220016	7.0 - 9.0	8.0	10.4	29.1	2,149	10	718	400 A A	BMW X5 (14-18)
275/50R20	109H	SL	VS	706794163	206174	7.5 - 9.5	8.5	11.2	30.9	2,270	10	676	400 A A	MERCEDES-BENZ GL/GLS-Class (13-18)

*Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.




EAGLE ENFORCER® ALL WEATHER®

Commanding All Weather Traction and Responsiveness for Extraordinary Performance in Demanding Pursuits

FEATURES	BENEFITS
Multi-zoned tread compound	Helps to increase grip for superior handling and enhanced cornering stability
Soy-based rubber compound with silica	Helps to deliver commanding traction in dry, wet and snowy conditions, while enhancing tread life
Asymmetric tread design with sweeping tread grooves	Helps to offer powerful traction and control in dry, wet and snowy conditions, while enhancing steering response
Aggressive shoulder blocks and wide lateral grooves	Help to provide confident maneuverability in dry, wet and snowy conditions
Robust construction	Helps to handle the demand and operating conditions that police vehicles encounter

PERFORMANCE RATINGS

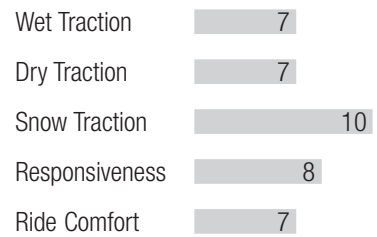

EAGLE ENFORCER ALL WEATHER SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
235/50R17	96V	SL	VS	732008558	237046	6.5 - 8.5	7.5	9.7	26.3	1,565	11	795	500 A A
265/60R17	108V	SL	VS	732001558	235372	7.5 - 9.5	8.0	10.7	29.5	2,205	11	708	500 A A
225/60R18	100V	SL	VS	732003558	235373	6.0 - 8.0	6.5	9.0	28.6	1,764	11	730	500 A A
245/55R18	103V	SL	VS	732004558	235374	7.0 - 8.5	7.5	10.0	28.6	1,929	11	730	500 A A
255/60R18	108V	SL	VS	732005558	237047	7.0 - 9.0	7.5	10.2	30.0	2,205	11	696	500 A A

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ALL-SEASON SPORT/TOURING

EAGLE GT® II

Classic Styling and All-Season Traction



All-Season



Chosen as Original Equipment
by Global Vehicle Manufacturers

PERFORMANCE

EAGLE GT II SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
P275/45R20	106V	SL	VSB	106137625	175627	8.5 - 10.0	9.0	10.8	29.8	2,094	11	702	420 A A
P285/50R20	111H	SL	VSB	106087625	165523	8.0 - 10.0	9.0	11.7	31.3	2,403	11	669	420 A A
* 305/50R20	120H	XL	VSB	106182625	180550	8.5 - 11.0	9.5	12.4	32.0	3,086	11	653	420 A A

*Discontinued 2020

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 ASYMMETRIC SUV AT

An All-Season Tire for SUV Drivers to Help Enhance Vehicle Handling and Appearance



30-Day Goodyear® Pledge

See page 11 for complete details.



All-Season



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment by Global Vehicle Manufacturers

EAGLE F1 ASYMMETRIC SUV AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/65R17	108V	XL	BLT	784037398	235392	6.5 - 8.5	7.0	9.5	29.1	2,205	10	719	240 AA A	JAGUAR E-PACE (18-20), LAND ROVER DISCOVERY SPORT (19-21), LAND ROVER RANGE ROVER EVOQUE (19-21)
235/60R18	107V	XL	BLT	784038398	235393	6.5 - 8.5	7.0	9.5	29.1	2,149	10	719	240 AA A	LAND ROVER DISCOVERY SPORT (19-21), LAND ROVER RANGE ROVER EVOQUE (19-21)
255/60R18	112W	XL	BLT	784500398	231367	7.0 - 9.0	7.5	10.2	30.0	2,469	10	696	240 AA A	JAGUAR F-PACE (16-19), LAND ROVER RANGE ROVER VELAR (17-19)
* 255/55R19	111W	XL	BLT	784009398	233736	7.0 - 9.0	8.0	10.4	30.0	2,403	10	696	240 AA A	
255/60R19	113W	XL	BLT	784004398	233429	7.0 - 9.0	7.5	10.2	31.1	2,535	9	673	240 AA A	
255/60R19	113W	XL	BLT	784124398	237495	7.0 - 9.1	7.5	10.2	31.1	2,535	9	673	241 AA A	
235/50R20	104W	XL	BLT	784116398	237352	6.5 - 8.5	8.0	9.9	29.5	1,984	10	690	240 AA A	
* 255/50R20	109W	XL	BLT	784502398	231366	7.0 - 9.0	8.0	10.4	30.1	2,271	10	695	240 AA A	
255/50R20	109W	XL	BLT	784154398	242206	7.0 - 9.0	8.0	10.0	30.1	2,271	10	695	240 AA A	JAGUAR F-PACE (16-19), LAND ROVER RANGE ROVER VELAR (17-19)
255/55R20	110W	XL	BLT	784074333	223779	7.0 - 9.0	8.0	10.4	31.0	2,337	10	674	240 AA A	LAND ROVER DISCOVERY (16-19), LAND ROVER RANGE ROVER (13-21)
255/55R20	110Y	XL	BLT	784389333	228992	7.0 - 9.1	8.0	10.4	31.0	2,337	10	674	240 AA A	
245/45R21	104W	XL	BLT	784039398	235394	6.5 - 8.5	7.0	9.5	29.1	1,984	9	719	240 AA A	JAGUAR E-PACE (17-19)
275/45R21	110W	XL	BLT	784072333	223778	8.5 - 10.5	9.0	10.8	30.7	2,337	10	680	240 AA A	LAND ROVER RANGE ROVER (13-19)
EAGLE F1 ASYMMETRIC SUV AT SCT (SOUNDCOMFORT TECHNOLOGY)														
235/50R20	104W	XL	BLT	784135398	238465	6.5 - 8.5	8.0	9.9	29.5	1,984	10	690	240 AA A	LAND ROVER DISCOVERY SPORT (19-21), LAND ROVER RANGE ROVER EVOQUE (19-21)

* Discontinued 2020

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

EAGLE® F1 ASYMMETRIC 5

Luxurious Comfort with Superior Wet Braking Performance
(Select sizes with SoundComfort Technology®)



30-Day Goodyear® Pledge

See page 11 for complete details.

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 ASYMMETRIC 5 SPECIFICATIONS


SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/40R20	101W	XL	SBL	103001588	240583	8.5 - 10	9.0	10.2	28.0	1,819	8	746	500 A A	
EAGLE F1 ASYMMETRIC 5 SCT (SOUNDCOMFORT TECHNOLOGY)														
255/40R20	101W	XL	SBL	103002589	240746	8.5 - 10	9.0	10.2	28.0	1,819	8	746	500 A A	TESLA MODEL Y (20-21)

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 SUPERCAR® 3R

A Track-Ready Tire Providing Superior Grip and Control in Dry Conditions

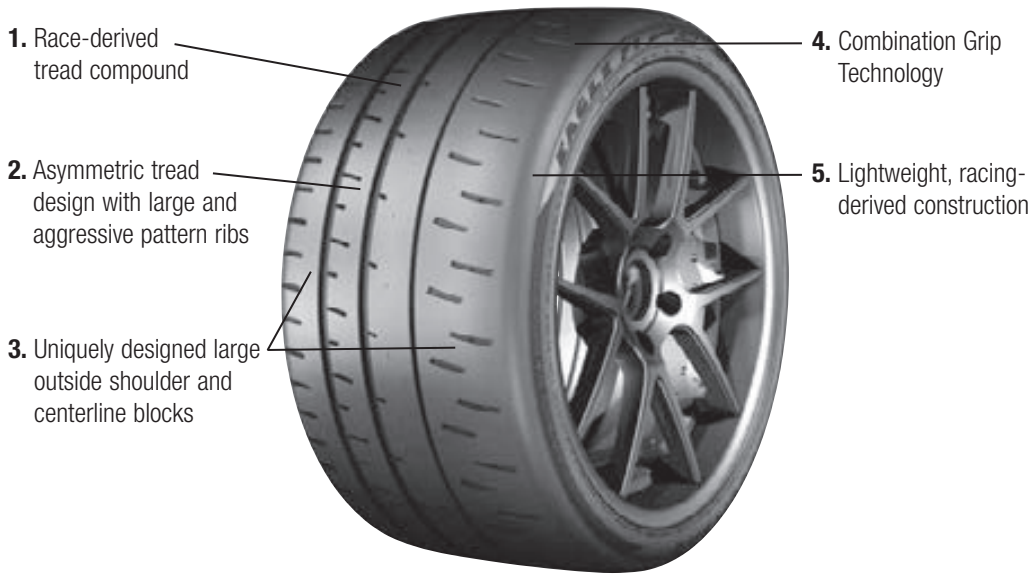




FEATURES

1. Racing-derived tread compound
2. Asymmetric tread design with large and aggressive pattern ribs
3. Uniquely designed large outside shoulder and centerline blocks
4. Combination Grip Technology
5. Lightweight, racing-derived construction

BENEFITS

- Helps to deliver superior performance in dry and damp conditions and provides consistent lap times
- Helps to provide phenomenal grip and precise steering response
- Help to deliver maximum grip while cornering and exceptional dry handling stability
- Helps to provide superior grip while cornering, allowing the vehicle to maneuver with more confidence under corner braking and acceleration
- Helps to reduce unsprung mass for enhanced steering and handling precision, and temperature stability


PERFORMANCE RATINGS

Wet Traction	N/A
Dry Traction	 10
Snow Traction	N/A
Responsiveness	 10
Ride Comfort	 5

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO

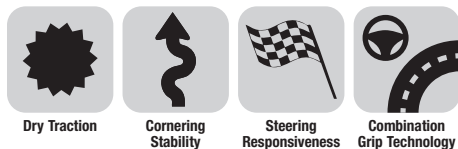

Chosen as Original Equipment by Global Vehicle Manufacturers

EAGLE F1 SUPERCAR 3R SPECIFICATIONS


SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/50ZR15	86Y	SL	VSB	797103538	235238	5.5 - 7.5	6.5	8.4	23.1	1,168	5	904	100 A A	
205/45ZR17	88Y	XL	VSB	797108538	235483	6.5 - 7.5	7.0	8.1	24.3	1,235	5	862	100 A A	
225/45ZR17	91Y	SL	VSB	797104538	235239	7.0 - 8.5	7.5	8.9	25.0	1,356	5	837	100 A A	
245/40ZR17	91Y	SL	VSB	797105538	235240	8.0 - 9.5	8.5	9.8	24.7	1,356	5	845	100 A A	
235/40ZR18	95Y	XL	VSB	797109538	235484	8.0 - 9.5	8.5	9.5	25.4	1,521	5	823	100 A A	
245/40ZR18	97Y	XL	VSB	797051538	235345	8.0 - 9.5	8.5	9.8	25.7	1,609	5	813	100 A A	
265/35ZR18	97Y	XL	VSB	797107538	235482	9.0 - 10.5	9.5	10.7	25.3	1,609	5	826	100 A A	
265/40ZR18	101Y	XL	VSB	797073538	235346	9.0 - 10.5	9.5	10.7	26.3	1,819	5	795	100 A A	
285/30ZR18	93Y	SL	VSB	797106538	235341	9.5 - 11.0	10.0	11.4	24.8	1,433	5	844	100 A A	
275/35ZR18	95Y	SL	VSB	797032538	234861	9.0 - 11.0	9.5	10.9	25.6	1,521	5	818	100 A A	
245/35ZR19	93Y	XL	VSB	797110538	235485	8.0 - 9.5	8.5	9.8	25.8	1,433	5	810	100 A A	
265/35ZR19	98Y	XL	VSB	797111538	235486	9.0 - 10.5	9.5	10.7	26.3	1,653	5	793	100 A A	
265/40ZR19	98Y	SL	VSB	797092538	236094	9.0 - 10.5	9.5	10.7	27.4	1,653	5	764	100 A A	
285/35ZR19	103Y	XL	VSB	797081538	235487	9.5 - 11.0	10.0	11.4	26.9	1,929	5	777	100 A A	
235/35ZR19	91Y	XL	VSB	797018538	234428	8.0 - 9.5	8.5	9.5	25.5	1,356	5	821	100 A A	
285/30ZR19	94Y	SL	VSB	797026538	234523	9.5 - 10.5	10.0	11.4	25.8	1,477	5	810	100 A A	
305/30ZR19	98Y	SL	VSB	797001538	225690	10.5 - 11.5	11.0	12.3	26.3	1,653	5	796	100 AA A	CHEVROLET CAMARO ZL1 1LE (17-21)
325/30ZR19	101Y	SL	VSB	797002538	225752	11.0 - 12.5	11.5	13.0	26.7	1,819	5	782	100 AA A	CHEVROLET CAMARO ZL1 1LE (17-21)
245/35ZR20	91Y	SL	VSB	797097538	236095	8.0 - 9.5	8.5	9.8	26.8	1,356	5	781	100 A A	
285/35ZR20	100Y	SL	VSB	797082538	236096	9.5 - 11	10.0	11.4	27.9	1,764	5	750	100 A A	
255/40ZR20	97Y	SL	VSB	797040538	235391	8.5 - 10	9.0	10.2	28.0	1,609	5	746	100 A A	
285/30ZR20	95Y	SL	VSB	797031538	234528	9.5 - 11	10.0	11.4	26.8	1,521	5	781	100 A A	
305/30ZR20	103Y	XL	VSB	797028538	234525	10.5 - 11.5	11.0	12.3	27.2	1,929	5	767	100 A A	
EAGLE F1 SUPERCAR 3R ROF														
285/30ZR19	94Y	SL	VSB	797026538	234523	9.5 - 10.5	10.0	11.4	25.8	1,477	5	810	100 A A	
335/25ZR20	99Y	SL	VSB	797030538	234526	11.5 - 12.5	12.0	13.5	26.6	1,709	5	785	100 A A	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.




EAGLE® F1 SUPERCAR® 3

For Those Who Are Inspired to Paint Every Road
and Sculpt Every Turn Like Never Before

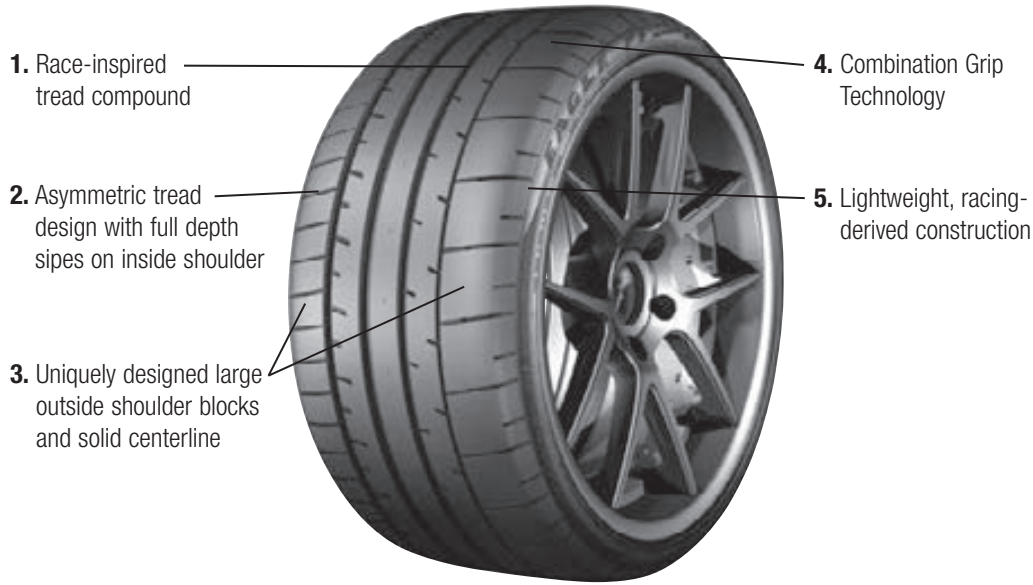

FEATURES	BENEFITS
1. Race-inspired tread compound	Helps to deliver superior performance in dry and damp conditions
2. Asymmetric tread design with full-depth sipes on inside shoulder	Helps to provide commanding grip, precise steering response and enhanced wet traction
3. Uniquely designed large outside shoulder blocks and solid centerline	Help to deliver powerful grip while cornering and exceptional dry handling stability
4. Combination Grip Technology	Helps to provide superior grip while cornering, allowing the vehicle to maneuver with more confidence under corner braking and acceleration
5. Lightweight, racing-derived construction	Helps to reduce unsprung mass for enhanced steering and handling precision, and temperature stability


PERFORMANCE RATINGS

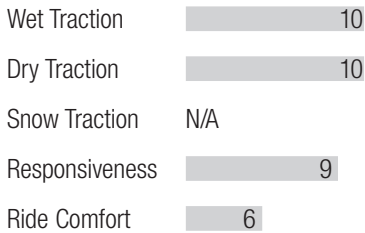

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO

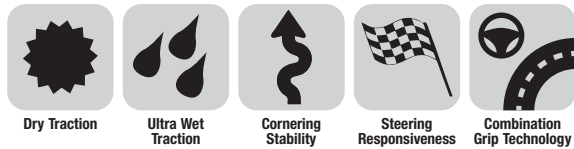

Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 SUPERCAR 3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
245/45ZR17	99Y	XL	VS	797053561	234606	7.5 - 9.0	8.0	9.6	25.7	1,709	9	814	220 AA A	
235/40ZR18	95Y	XL	VS	797046561	234601	8.0 - 9.5	8.5	9.5	25.4	1,521	9	823	220 AA A	
245/40ZR18	97Y	XL	VS	797051561	234604	8.0 - 9.5	8.5	9.8	25.7	1,609	9	813	220 AA A	
255/40ZR18	99Y	XL	VS	797062561	234608	8.5 - 10.0	9.0	10.2	26.0	1,709	9	803	220 AA A	
265/40ZR18	101Y	XL	VS	797073561	234613	9.0 - 10.5	9.5	10.7	26.3	1,819	8	795	220 AA A	
275/35ZR18	95Y	SL	VS	797032561	234615	9.0 - 11.0	9.5	10.8	25.6	1,521	8	818	220 AA A	
275/40ZR18	99Y	SL	VS	797076561	234616	9.0 - 11.0	9.5	10.9	26.7	1,709	8	784	220 AA A	
295/30ZR18	98Y	XL	VS	797083561	234622	10.0 - 11.5	10.5	11.9	25.0	1,653	8	836	220 AA A	
235/35ZR19	91Y	XL	VS	797018561	234530	8.0 - 9.5	8.5	9.5	25.5	1,356	9	821	220 AA A	
245/35ZR19	93Y	XL	VS	797047561	234602	8.0 - 9.5	8.5	9.8	25.8	1,433	9	810	220 AA A	
245/40ZR19	98Y	XL	VS	797052561	234605	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	220 AA A	
255/40ZR19	100Y	XL	VS	797068561	234609	8.5 - 10.0	9.0	10.2	27.1	1,764	9	773	220 AA A	
265/35ZR19	98Y	XL	VS	797070561	234612	9.0 - 10.5	9.5	10.7	26.3	1,653	8	793	220 AA A	
265/40ZR19	102Y	XL	VS	797024561	234614	9.0 - 10.5	9.5	10.7	27.4	1,874	8	764	220 AA A	
275/40ZR19	101Y	SL	VS	797079561	234617	9.0 - 11.0	9.5	10.9	27.7	1,819	8	755	220 AA A	
285/35ZR19	103Y	XL	VS	797081561	234620	9.5 - 11.0	10.0	11.4	26.9	1,929	8	777	220 AA A	
295/30ZR19	100Y	XL	VS	797084561	234624	10.0 - 11.5	10.5	11.9	26.0	1,764	8	803	220 AA A	
305/30ZR19	102Y	XL	VS	797086561	234626	10.5 - 11.5	11.0	12.3	26.3	1,874	8	796	220 AA A	
325/30ZR19	105Y	XL	VS	797091561	234628	12.0 - 13.0	12.0	13.2	26.7	2,039	8	782	220 AA A	
245/35ZR20	95Y	XL	VS	797050561	234603	8.0 - 9.5	8.5	9.8	26.8	1,521	9	781	220 AA A	
245/45ZR20	103Y	XL	VS	797058561	234607	7.5 - 9.0	8.0	9.6	28.7	1,929	9	729	220 AA A	
255/40ZR20	101Y	XL	VS	797020561	234610	8.5 - 10.0	9.0	10.2	28.0	1,819	9	746	220 AA A	
255/45ZR20	105Y	XL	VS	797069561	234611	8.0 - 9.5	8.5	10.0	29.1	2,039	9	719	220 AA A	
275/40ZR20	106Y	XL	VS	797080561	234618	9.0 - 11.0	9.5	10.9	28.7	2,094	8	729	220 AA A	
285/35ZR20	100Y	SL	VS	797082561	234621	9.5 - 11.0	10.0	11.4	27.9	1,764	8	750	220 AA A	
295/30ZR20	101Y	XL	VS	797085561	234625	10.0 - 11.0	10.5	11.9	27.0	1,819	8	774	220 AA A	
305/35ZR20	104Y	SL	VS	797088561	234627	10.0 - 12.0	11.0	12.3	28.4	1,984	8	735	220 AA A	
285/30ZR20	95Y	SL	B01	797788523	225754	9.5 - 11.0	10.0	11.4	26.8	1,521	7	781	220 AA A	CHEVROLET CAMARO SS 1LE / ZL1 (17-21)
305/30ZR20	99Y	SL	B01	797789523	225756	10.5 - 11.5	11.0	12.3	27.2	1,709	7	767	220 AA A	CHEVROLET CAMARO SS 1LE / ZL1 (17-21)
EAGLE F1 SUPERCAR 3 ROF														
285/30ZR19	94Y	SL	BLT	797033553	227367	9.5 - 10.5	10.0	11.4	25.8	1,477	5	810	220 AA A	
335/25ZR20	99Y	SL	BLT	797036553	227368	11.0 - 12.5	12.0	13.5	26.6	1,709	5	785	220 AA A	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 SUPERCAR® G: 2/SUPERCAR®

(Select sizes with EMT/ROF)

Race-Inspired, Ultra High-Performance Dry Traction for Select Supercars

1. Race-inspired ultra high-performance tread compound

2. Asymmetric, directional tread design with massive tread blocks on the outboard side of the tread*

3. Sweeping AquaChannel® grooves on the inboard side of the tread*

4. Innovative multi-radius mold shape

5. Serrated band sidewall styling with distinctive lettering


6. Specialized ultra high-performance construction

EAGLE F1 SUPERCAR TREAD PATTERN VARIES WITH SIZE AND APPLICATION

FEATURES BENEFITS

1. Race-inspired ultra high-performance tread compound	Helps provide excellent dry traction
2. Asymmetric, directional tread design with massive tread blocks on the outboard side of the tread*	Helps enhance dry cornering grip
3. Sweeping AquaChannel® grooves on the inboard side of the tread*	Help enhance wet cornering grip
4. Innovative multi-radius mold shape	Helps offer precise handling and smooth, even wear
5. Serrated band sidewall styling with distinctive lettering	Offers an ultra high-performance appearance
6. Specialized ultra high-performance construction	Meets high-end OE fitments for select supercars

PERFORMANCE RATINGS

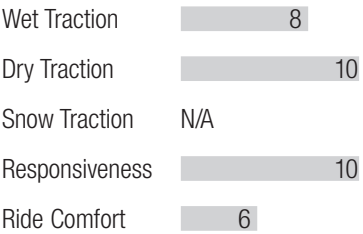

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

Dry Traction **Ultra Wet Traction** **Cornering Stability** **Steering Responsiveness**



Chosen as Original Equipment by Global Vehicle Manufacturers

* Innovation specific to SuperCar G: 2.

EAGLE F1 SUPERCAR G: 2 ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P275/35ZR18	87Y	LL	VSB	408561330	215986	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	
P275/35ZR18	87Y	LL	VSB	408561331	215987	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	
P325/30ZR19	94Y	LL	VSB	408029331	215963	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	
P325/30ZR19	94Y	LL	VSB	408029330	215988	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	

EAGLE F1 SUPERCAR SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P265/40ZR17	91Y	LL	VSB	389119128	158662	9.0 - 10.0	9.5	10.7	25.4	1,356	7	824	220 AA A	
P255/45ZR18	99W	SL	VSB	389046128	198491	8.0 - 9.5	8.5	10.0	27.0	1,709	11	773	220 AA A	
P285/40ZR18	96W	LL	VSB	389027128	198492	9.5 - 11.0	10.0	11.4	27.0	1,565	11	775	220 AA A	
P295/35ZR18	91Y	SL	VSB	389118128	158658	10.0 - 12.0	10.0	11.7	26.1	1,356	8	801	220 AA A	
245/45ZR20	99Y	SL	VSB	389926128	226379	7.5 - 9.0	8.0	9.6	28.7	1,709	10	729	220 AA A	CHRYSLER 300 (13-21), DODGE CHALLENGER SRT8 (13-21), DODGE CHARGER (13-21), FORD TAURUS SHO (13-16)
245/45ZR20	99Y	SL	VSB	389428128	234796	7.5 - 9	8.0	9.6	28.7	1,709	10	729	220 AA A	
255/35R22	99W	XL	VSB	389357128	218581	8.5 - 10.0	9.0	10.2	29.0	1,709	9	720	220 AA A	KARMA REVERO (17-17)
285/35R22	102W	SL	VSB	389398128	230809	9.5 - 11.0	10.0	11.4	29.9	1,874	10	699	220 AA A	KARMA REVERO (17-17)
EAGLE F1 SUPERCAR EMT														
P275/35ZR18	87Y	LL	VSB	412561506	197280	9.0 - 11.0	9.5	10.8	25.6	1,201	8	818	220 AA A	
P325/30ZR19	94Y	LL	VSB	412562506	197362	12.0 - 13.0	12.0	13.2	26.7	1,477	8	782	220 AA A	
EAGLE F1 SUPERCAR SCT (SOUND COMFORT TECHNOLOGY)														
255/35R22	99W	XL	VSB	389357001	235606	8.5 - 10.0	9.0	10.2	29.0	1,709	9	720	220 AA A	KARMA REVERO (18-21)
285/35R22	102W	SL	VSB	389398001	235608	9.5 - 11.0	10.0	11.4	29.9	1,874	10	699	220 AA A	KARMA REVERO (18-21)

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE F1 SUPERSPORT

Superior Grip and Handling for
Luxury Sport Performance Vehicles



30-Day Goodyear® Pledge
See page 11 for complete details.

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 SUPERSPORT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/35R20	97Y	XL	BLT	112072591	241447	8.5 - 10.0	9	10	27	1,609	9	774	240 AA A	PORSCHE 911 TURBO (20-21)
315/30R21	105Y	XL	BLT	112071591	241453	10.5 - 11.5	11	12.5	28.5	2,039	7	734	240 AA A	PORSCHE 911 TURBO (20-21)

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 ASYMMETRIC 3

(Select sizes with ROF/SoundComfort Technology®)

A Premium Ultra High-Performance Summer Tire for Commanding Traction and Precise Handling in Wet and Dry Conditions




FEATURES

1. Asymmetric tread pattern
2. Grip-boosting tread compound
3. Solid center rib
4. Advanced construction

BENEFITS

- Offers powerful traction in turns and enhanced wet traction
- Enhances road adhesion for superior traction
- Helps to provide quick response and accurate on-center feel
- Tuned for ultra high-performance suspension systems

PERFORMANCE RATINGS

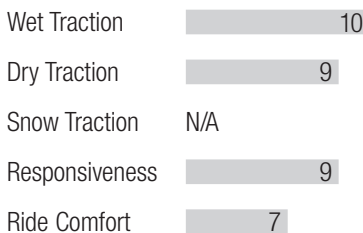

30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 ASYMMETRIC 3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 205/45R17	88W	XL	BLT	783100388	236323	6.5 - 7.5	7.0	8.1	24.3	1,235	10	862	300 AA A	
205/45R17	88W	XL	BLT	783152388	241626	6.5 - 7.5	7.0	8.0	24.3	1,235	8	862	300 AA A	MINI COOPER EV (20-21)
245/40R17	91Y	SL	BLT	783131388	234295	8.0 - 9.5	8.5	9.8	24.7	1,356	10	845	300 AA A	
245/35R18	92Y	XL	BLT	783457388	231547	8.0 - 9.5	8.5	9.8	24.8	1,389	10	843	300 AA A	
255/35R18	94Y	XL	BLT	783143388	231561	8.5 - 10.0	9.0	10.2	25.0	1,477	10	836	300 AA A	
255/45R18	103Y	XL	BLT	783935388	233066	8.0 - 9.5	8.5	10.0	27.1	1,929	10	773	300 AA A	
* 265/35R18	97Y	XL	BLT	783121388	234284	9.0 - 10.5	9.5	10.7	25.3	1,609	10	826	300 AA A	
225/35R19	88Y	XL	BLT	783448388	231546	7.5 - 9.0	8.0	9.1	25.2	1,235	10	829	300 AA A	
235/35R19	91Y	XL	BLT	783993388	233069	8.0 - 9.5	8.5	9.5	25.5	1,356	10	821	300 AA A	
245/40R19	98Y	XL	BLT	783787388	231373	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	300 AA A	JAGUAR XF (16-18)
255/30R19	91Y	XL	BLT	783459388	231549	8.5 - 9.5	9.0	10.2	25.1	1,356	10	833	300 AA A	
255/35R19	96Y	XL	BLT	783494388	231562	8.5 - 10.0	9.0	10.2	26.0	1,565	10	804	300 AA A	
255/40R19	100Y	XL	BLT	783499388	231563	8.5 - 10.0	9.0	10.2	27.0	1,764	10	774	300 AA A	
265/45ZR19	105Y	XL	BLT	783859388	232873	8.5 - 10.0	9.0	10.5	28.4	2,039	9	736	300 AA A	PORSCHE PANAMERA (17-19)
285/30R19	98Y	XL	BLT	783490388	231551	9.5 - 10.5	10.0	11.4	25.8	1,653	10	810	300 AA A	
295/40ZR19	108Y	XL	BLT	783917388	232874	10.0 - 11.5	10.5	11.9	28.3	2,205	9	738	300 AA A	PORSCHE PANAMERA (17-19)
255/35R20	97Y	XL	BLT	783363388	231374	8.5 - 10.0	9.0	10.2	27.0	1,609	9	774	300 AA A	JAGUAR XF (16-18)
245/35ZR20	95Y	XL	BLT	783125388	237712	8.0 - 9.5	8.5	9.8	26.8	1,521	9	781	240 AA A	PORSCHE MACAN (19-21)
245/40R20	95Y	SL	BLT	783390388	231732	8.0 - 9.5	8.5	9.8	27.7	1,521	8	754	300 AA A	CADILLAC CT6 (19-20)
265/40R20	104Y	XL	BLT	783226572	237356	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737	300 AA A	
265/35ZR21	101Y	XL	BLT	783146388	240893	9.0 - 10.5	9.5	10.7	28.3	1,819	9	738	300 AA A	PORSCHE TAYCAN (20-21)
305/30ZR21	104Y	XL	BLT	783142388	240892	10.5 - 11.5	11.0	12.3	28.2	1,984	9	740	300 AA A	PORSCHE TAYCAN (20-21)
305/30ZR21	104Y	XL	BLT	783126388	237713	10.5 - 11.5	11.0	12.3	28.2	1,984	9	740	240 AA A	PORSCHE 911 (19-21)
265/35R22	102W	XL	BLT	783407388	228220	9.0 - 10.5	9.5	10.7	29.3	1,874	9	713	300 AA A	
285/35R22	106W	XL	BLT	783411388	228292	9.5 - 11.0	10.0	11.4	29.9	2,094	9	699	300 AA A	
EAGLE F1 ASYMMETRIC 3 SUV														
265/45R20	104Y	SL	BLT	783119544	237439	8.5 - 10	9.0	10.5	29.4	1,984	9	712	300 AA A	PORSCHE MACAN (19-21)
295/40R20	106Y	SL	BLT	783123544	237440	10.0 - 11.5	10.5	11.9	29.3	2,094	9	714	300 AA A	PORSCHE MACAN (19-21)
265/45R21	108H	XL	BLT	783137544	239644	8.5 - 10	9.0	10.5	30.3	2,205	9	689	240 AA A	AUDI E-TRON / E-TRON SPORTBACK (19-20)
EAGLE F1 ASYMMETRIC 3 ROF														
205/45R17	88W	XL	BLT	783100385	241609	6.5 - 7.5	7.0	8.0	24.3	1,235	8	862	300 AA A	MINI COOPER EV (20-21)
225/55R17	97Y	SL	BLT	783148385	241588	6.0 - 8.0	7.0	9.0	26.8	1,609	10	781	300 AA A	
205/40R18	86W	XL	BLT	783149385	241610	7.0 - 8.0	7.5	8.0	24.5	1,168	8	855	300 AA A	MINI COOPER EV (20-21)
225/45R18	95Y	XL	BLT	783138385	239499	7.0 - 8.5	7.5	8.9	25.9	1,521	10	806	300 AA A	BMW 3 SERIES / 4 SERIES (19-21)
225/50R18	95W	SL	BLT	783115385	237100	6.0 - 8.0	7.0	9.2	26.9	1,521	9	777	300 AA A	MINI COUNTRYMAN (18-21)
** P245/40ZR18	93Y	SL	BLT	783428385	227365	8.0 - 9.5	8.5	9.8	25.7	1,433	9	813	240 AA A	
245/45R18	100Y	XL	BLT	783005385	233662	7.5 - 9.0	8.0	9.7	26.7	1,764	9	756	300 AA A	MERCEDES-BENZ CLS-CLASS (19-21), MERCEDES-BENZ E-CLASS (17-21)
255/40R18	99Y	XL	BLT	783139385	239500	8.5 - 10	9.0	10.2	26.0	1,709	10	803	300 AA A	BMW 3 SERIES / 4 SERIES (19-21)
* 275/40R18	99Y	SL	BLT	783007385	233663	9.0 - 11.0	9.5	10.8	26.7	1,709	10	756	300 AA A	
225/40R19	93Y	XL	BLT	783182385	237649	7.5 - 9.0	8.0	9.1	26.1	1,433	10	801	300 AA A	BMW 3 SERIES / 4 SERIES (19-21)
*** P245/35ZR19	89Y	SL	BLT	783349385	228975	8.0 - 9.5	8.5	9.8	25.8	1,279	9	810	240 AA A	
245/40R19	98Y	XL	BLT	783836385	232802	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	300 AA A	MERCEDES-BENZ CLS-CLASS (19-21)
245/40R19	98Y	XL	BLT	783141385	240525	8.0 - 9.5	8.5	9.8	26.7	1,653	10	782	300 AA A	BMW 5 SERIES (G30) (17-21)
255/35R19	96Y	XL	BLT	783494385	237650	8.5 - 10.0	9.0	10.2	26.0	1,565	10	803	300 AA A	BMW 3 SERIES / 4 SERIES (19-21)
275/35R19	100Y	XL	BLT	783857385	232803	9.0 - 11.0	9.5	10.9	26.6	1,565	10	786	300 AA A	BMW 5 SERIES (G30) (17-21), MERCEDES-BENZ CLS-CLASS (19-21), MERCEDES-BENZ E-CLASS (17-21)
** P285/35ZR19	99Y	SL	BLT	783432385	227366	9.5 - 11.0	10.0	11.4	26.9	1,709	8	777	240 AA A	
245/35R20	95Y	XL	BLT	783129385	237753	8.0 - 9.5	8.5	9.8	26.8	1,521	10	781	300 AA A	BMW 5 SERIES (G30) (17-21), BMW 8 SERIES (19-21)
245/40R20	95Y	SL	BLT	783390385	225684	8.0 - 9.5	8.5	9.8	27.7	1,521	8	754	300 AA A	CHEVROLET CAMARO SS (16-21)
275/30R20	97Y	XL	BLT	783723385	232429	9.0 - 10.0	9.5	14.9	26.5	1,609	10	789	300 AA A	BMW 5 SERIES (G30) (17-21), BMW 8 SERIES (19-21), MERCEDES-BENZ CLS-CLASS (19-21), MERCEDES-BENZ E-CLASS (17-21)
275/35R20	98Y	SL	BLT	783400385	225686	9.0 - 11.0	9.5	10.9	27.6	1,653	8	758	300 AA A	CHEVROLET CAMARO SS (16-21)
*** P285/30ZR20	95Y	SL	BLT	783355385	228976	9.5 - 11.0	10.0	11.4	28.9	1,521	9	750	240 AA A	
EAGLE F1 ASYMMETRIC 3 SCT (SOUND COMFORT TECHNOLOGY)														
265/40R20	104Y	XL	BLT	783226394	236059	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737	300 AA A	AUDI A8 (18-21)
265/35R22	102W	XL	BLT	783407394	230457	9.0 - 10.5	9.5	10.7	29.3	1,874	9	713	300 AA A	TESLA MODEL X (16-21)
285/35R22	106W	XL	BLT	783411394	230459	9.5 - 11.0	10.0	11.4	29.9	2,094	9	699	300 AA A	TESLA MODEL X (16-21)
EAGLE F1 ASYMMETRIC 3 ROF/SCT														
245/40R19	98Y	XL	BLT	783836394	237005	8 - 9.5	8.5	9.8	26.7	1,653	9	782	300 AA A	MERCEDES-BENZ E-CLASS (18-21)
225/40R20	94Y	XL	BLT	783147385	241429	7.5 - 9.0	8.0	9.0	27.1	1,477	9	745	300 AA A	
245/35R20	95Y	XL	BLT	783718394	237006	8 - 9.5	8.5	9.8	26.8	1,521	9	781	300 AA A	MERCEDES-BENZ CLS-CLASS (19-21), MERCEDES-BENZ E-CLASS (18-21)

* Discontinued 2020

** Special size tuned for the 2016 Chevrolet Corvette C7.

*** Special size tuned for the 2016 Chevrolet Corvette C7 Z51.

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

EAGLE® F1 ASYMMETRIC 2

(Select sizes with ROF/SoundComfort Technology®)

**A Premium Tire for Ultra High-Performance Driving in Summer Months,
Built for Responsive Handling and Control in Both Dry and Wet Conditions**




FEATURES	BENEFITS
1. Tread compound with motorsport resins	Helps provide superior dry handling
2. Lightweight, racing-derived construction	Helps reduce unsprung mass for enhanced steering precision and handling
3. ActiveBraking Technology	Offers enhanced stopping power on wet and dry roads
4. Advanced tread block pattern	Helps reduce excessive road noise

1. Tread compound with motorsport resins
2. Lightweight, racing-derived construction
3. ActiveBraking Technology
4. Advanced tread block pattern

- Helps provide superior dry handling
- Helps reduce unsprung mass for enhanced steering precision and handling
- Offers enhanced stopping power on wet and dry roads
- Helps reduce excessive road noise

PERFORMANCE RATINGS

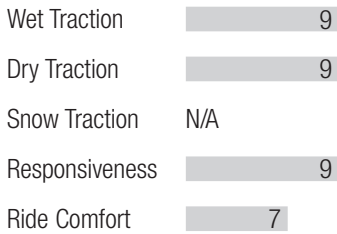

30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Dry Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 ASYMMETRIC 2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 235/40R18	95Y	XL	BLT	784764348	219320	8.0 - 9.5	8.5	9.5	25.4	1,521	10	823	240 AA A	FORD FOCUS ST (13-18), HONDA CIVIC (17-20), HYUNDAI ELANTRA N LINE (21)
* 235/45ZR18	94Y	SL	BLT	784055348	221491	7.5 - 9.0	8.0	9.3	26.3	1,477	9	794	240 AA A	PORSCHE BOXSTER / CAYMAN (13-21)
235/50R18	101W	XL	BLT	784168348	226229	6.5 - 8.5	7.5	9.7	27.3	1,819	10	766	300 AA A	
265/45ZR18	101Y	SL	BLT	784066348	221492	8.5 - 10.0	9.0	10.5	27.4	1,819	9	764	240 AA A	PORSCHE BOXSTER / CAYMAN (13-21)
275/45ZR18	103Y	SL	BLT	784443348	231122	8.5 - 10.5	9.0	10.7	27.8	1,929	9	753	240 AA A	
* 235/40ZR19	92Y	SL	BLT	784045348	221459	8.0 - 9.5	8.5	9.5	26.4	1,389	9	791	240 AA A	PORSCHE 911 (13-18), PORSCHE BOXSTER / CAYMAN (13-15)
* 235/55R19	101Y	SL	BLT	784437348	230361	6.5 - 8.5	7.5	9.7	29.2	1,819	9	717	240 AA A	PORSCHE MACAN (16-18)
265/30R19	93Y	XL	BLT	784318348	217273	9.0 - 10.5	9.5	10.7	25.3	1,433	10	826	300 AA A	
265/40ZR19	98Y	SL	BLT	784067348	221493	9.0 - 10.5	9.5	10.7	27.4	1,653	9	764	240 AA A	PORSCHE BOXSTER / CAYMAN (13-15)
265/50R19	110Y	XL	BLT	784247348	228747	7.5 - 9.5	8.5	10.9	29.5	2,337	10	709	240 AA A	
275/30R19	96Y	XL	BLT	784360348	217714	9.0 - 10.0	9.5	10.9	25.6	1,565	10	818	300 AA A	
285/35ZR19	103Y	XL	BLT	784048348	221460	9.5 - 11.0	10.0	11.4	26.9	1,929	9	777	240 AA A	PORSCHE 911 (13-18)
285/35R19	99Y	SL	BLT	784075348	223832	9.5 - 11.0	10.0	11.4	26.9	1,709	10	777	300 AA A	
295/35ZR19	100Y	SL	BLT	784093348	224591	10.0 - 11.5	10.5	11.9	27.1	1,764	9	771	240 AA A	PORSCHE 911 (13-18)
235/35ZR20	88Y	SL	BLT	784194348	226927	8.0 - 9.50	8.5	9.5	26.5	1,235	9	790	240 AA A	PORSCHE BOXSTER / CAYMAN (15-19)
265/35ZR20	95Y	SL	BLT	784204348	226928	9.0 - 10.5	9.5	10.7	27.3	1,521	9	765	240 AA A	PORSCHE BOXSTER / CAYMAN (15-19)
285/40R21	109Y	XL	BLT	784445348	231304	9.5 - 11	10.0	11.4	30.0	2,271	10	698	240 AA A	
EAGLE F1 ASYMMETRIC 2 SUV														
265/50R19	110Y	XL	BLT	784247560	235994	7.5 - 9.5	8.5	10.9	29.5	2337	9	709	240 AA A	MASERATI LEVANTE (17-19)
265/45R20	108Y	XL	BLT	784741348	232626	8.5 - 10.0	9.0	10.5	29.4	2,205	9	711	240 AA A	MASERATI LEVANTE (17-20)
EAGLE F1 ASYMMETRIC 2 ROF														
225/40R18	92W	XL	BLT	784806359	232799	7.5 - 9.0	8.0	9.1	25.1	1,389	10	833	240 AA A	MERCEDES-BENZ CLA-CLASS (17-19)
225/40R19	89Y	SL	BLT	784044359	223276	7.5 - 9.0	8.0	9.1	26.1	1,279	10	801	240 AA A	BMW 3 SERIES / 4 SERIES (13-18)
225/40R19	93Y	XL	BLT	784182359	226533	7.5 - 9.0	8.0	0.0	26.1	1,433	10	801	240 AA A	MERCEDES-BENZ C-CLASS (15-21)
245/35R19	93Y	XL	BLT	784140359	226534	8.0 - 9.5	8.5	9.8	25.8	1,433	10	810	240 AA A	MERCEDES-BENZ C-CLASS (15-21)
255/35R19	92Y	SL	BLT	784054359	223277	8.5 - 10.0	9.0	10.2	26.0	1,389	10	803	240 AA A	BMW 3 SERIES / 4 SERIES (13-18)
245/40R20	99Y	XL	BLT	784117359	225601	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	240 AA A	MERCEDES-BENZ S-CLASS (14-20)
275/35R20	102Y	XL	BLT	784118359	225602	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 AA A	MERCEDES-BENZ S-CLASS (14-20)
EAGLE F1 ASYMMETRIC 2 ROF SCT (SOUND COMFORT TECHNOLOGY)														
245/40R20	99Y	XL	BLT	784117392	230249	8.0 - 9.5	8.5	9.8	27.7	1,709	9	754	240 AA A	MERCEDES-BENZ S-CLASS MAYBACH (16-20)
* 275/35R20	102Y	XL	BLT	784118392	230250	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 AA A	MERCEDES-BENZ S-CLASS MAYBACH (16-20)

* Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.




EAGLE® F1 ASYMMETRIC EAGLE® F1 ASYMMETRIC SUV

Active CornerGrip® Technology for Commanding Dry Grip
and Ultra High-Performance Handling



30-Day Goodyear® Pledge

See page 11 for complete details.



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 ASYMMETRIC SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
205/55ZR17	91Y	SL	BLT	784160287	215274	5.5 - 7.5	6.5	8.4	25.9	1,356	10	807	240 AA A	
235/50ZR17	96Y	SL	BLT	784162287	215275	6.5 - 8.5	7.5	9.7	26.3	1,565	10	795	240 AA A	
265/35ZR19	94Y	SL	BLT	784165287	215277	9.0 - 10.5	9.5	10.7	26.3	1,477	9	795	240 AA A	
* 265/40R20	104Y	XL	BLT	784226336	217564	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737	240 AA A	
EAGLE F1 ASYMMETRIC ROF														
* 255/50R19	107W	XL	BLT	784305333	225986	7.0 - 9.0	8.0	10.4	29.1	2,149	10	719	240 AA A	BMW X5 (14-18)
285/45R19	111W	XL	BLT	784306333	225990	9.0 - 10.5	9.5	11.2	29.1	2,403	9	719	240 AA A	BMW X5 (14-18)

* Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

EAGLE F1 ASYMMETRIC SUV SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/65R17	108V	XL	BLT	784037398	235392	6.5 - 8.5	7.0	9.5	29.1	2,205	10	718	240 AA A	
235/60R18	107V	XL	BLT	784038398	235393	6.5 - 8.5	7.0	9.5	29.1	2,149	10	718	240 AA A	
255/60R18	112W	XL	BLT	784500398	231367	7.0 - 9.0	7.5	10.2	30.0	2,469	10	696	240 AA A	
255/50R19	103W	SL	VSBL	784287347	218483	7.0 - 9.0	8.0	10.3	29.1	1,929	10	719	240 AA A	MERCEDES-BENZ ML/GLE-CLASS (13-18)
235/50R20	104W	XL	BLT	784116398	237352	6.5 - 8.5	7.0	9.3	29.3	1,984	10	690	240 AA A	
* 255/50R20	109W	XL	BLT	784502398	231366	7.0 - 9.0	8.0	10.4	30.1	2,271	10	695	240 AA A	
255/55R20	110Y	XL	BLT	784389333	228992	7.0 - 9.0	8.0	10.4	31.0	2,337	10	674	240 AA A	LAND ROVER RANGE ROVER SPORT (13-19)
245/45R21	104W	XL	BLT	784039398	235394	8.0 - 9.5	8.5	9.6	29.7	1,984	10	680	240 AA A	
275/45R21	110W	XL	BLT	784072333	223778	8.5 - 10.5	9.5	10.8	30.8	2,337	10	680	240 AA A	
295/40R22	112W	XL	BLT	784102562	236369	10 - 11.5	10.5	11.9	31.3	2,469	9	668	240 AA A	MERCEDES-BENZ G63 (19-21)

* Discontinued 2020

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE® F1 GS-2 EMT

Ultra High-Performance Tires for Specialty and OE Applications



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 GS-2 EMT SPECIFICATIONS


SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
P245/40ZR18	88Y	LL	VS	406609164	201866	8.0 - 9.5	8.5	9.8	25.7	1,235	10	813	300 AA A
P285/35ZR19	90Y	LL	VS	406610164	201867	9.5 - 11.0	10.0	11.4	26.9	1,323	11	777	300 AA A

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.



EAGLE® F1 GS EMT

Ultra High-Performance Tire for Specialty and OE Applications

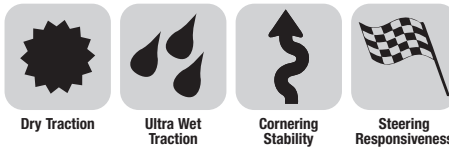

Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE F1 GS EMT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
P245/45ZR17	89Y	SL	B02	406375063	90721	7.5 - 9.0	8.0	9.6	25.7	1,279	10	814	300 AA A
P275/40ZR18	94Y	SL	B02	406390063	90723	9.0 - 11.0	9.5	10.9	26.7	1,477	10	784	300 AA A

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.
B02 – Broken serrated band – EMT

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EAGLE NCT® 5

Impressive OE Fitments on European and Asian High-Performance Vehicles



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EAGLE NCT 5 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
EAGLE NCT 5 EMT														
255/50R21	106W	SL	BLT	797010272	233884	7.0 - 9.0	8.0	10.4	31.1	2,094	10	673	240 A A	ROLLS-ROYCE PHANTOM (13-17)
285/45R21	109W	SL	BLT	797652272	233883	9.5 - 10.5	9.5	11.2	31.1	2,271	10	673	240 A A	ROLLS-ROYCE PHANTOM (13-17)
EAGLE NCT 5 ROF														
225/45R17	91V	SL	BLT	797173556	216548	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 A A	BMW 1 SERIES (13-14)
* 255/50R21	106W	SL	WSW	797650541	233611	7.0 - 9.0	8.0	10.4	31.1	2,094	10	673	240 A A	ROLLS-ROYCE PHANTOM (13-17)
* 285/45R21	109W	SL	WSW	797652541	233612	9.5 - 10.5	9.5	11.2	31.1	2,271	10	673	240 A A	ROLLS-ROYCE PHANTOM (13-17)

*Discontinued 2020

EMT, run-flat radial. Refer to the run-flat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

ROF, RunOnFlat™ radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EXCELLENCE®

(Select sizes with ROF)

Original Equipment Tire on Select European Import Vehicles



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EXCELLENCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/45R20	101W	SL	BLT	684011293	224173	8.0 - 9.5	8.5	10.0	29.1	1,819	10	719	240 A A	AUDI Q5 (13-17)
EXCELLENCE ROF														
* 195/55R16	87V	SL	VSB	111971513	203120	5.5 - 7.0	6.0	7.9	24.4	1,202	10	856	240 A A	MINI COOPER S (07-13)
225/45R17	91W	SL	VSB	111870513	203392	7.0 - 8.5	7.5	8.9	25.0	1,356	10	837	240 A A	MERCEDES-BENZ C-CLASS (07-14), CLK-CLASS (07-14), SLK-CLASS (07-14)
* 225/55R17	97Y	SL	BLT	111272513	217118	6.0 - 8.0	7.0	9.2	26.8	1,609	9	781	240 A A	BMW 5 SERIES/6 SERIES (11-14)
245/40R19	98Y	XL	BLT	111003513	219429	8.0 - 9.5	8.5	9.8	26.7	1,653	9	782	240 A A	BMW 5 SERIES / 6 SERIES (13-17)
245/45R19	98Y	SL	BLT	111016513	209228	7.5 - 9.0	8.0	9.6	27.7	1,653	10	755	240 A A	BMW 7 SERIES/5 GT (09-13)
275/35R19	96Y	SL	BLT	111446513	217121	9.0 - 11.0	9.5	10.9	26.6	1,565	9	787	240 A A	BMW 5 SERIES / 6 SERIES (13-17)
275/40R19	101Y	SL	BLT	111017513	209229	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	240 A A	BMW 7 SERIES/5 GT (09-13)
245/40R20	99Y	XL	BLT	111045513	209251	8.0 - 9.5	8.5	9.8	27.7	1,709	10	754	240 A A	BMW 7 SERIES (13-17)
275/35R20	102Y	XL	BLT	111048513	209252	9.0 - 11.0	9.5	10.9	27.6	1,874	10	758	240 A A	BMW 7 SERIES (13-17)

* Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



EFFICIENTGRIP™

(Select sizes with ROF/ROF SoundComfort Technology®)
Original Equipment Tire on Select European Vehicles

FEATURES	BENEFITS
----------	----------

Optimized silica tread compound	Helps provide enhanced traction in wet conditions
Wide circumferential grooves	Help evacuate water from beneath the tread
OE-tuned asymmetric tread design	Provides responsive handling and a smooth touring ride



Dry Traction



Ultra Wet Traction



Steering Responsiveness



Chosen as Original Equipment
by Global Vehicle Manufacturers

EFFICIENTGRIP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 235/55R19	105V	XL	BLT	112019381	228640	6.5 - 8.5	7.5	9.7	29.2	2,039	11	717	440 A A	LAND ROVER EVOQUE (L538)
EFFICIENTGRIP ROF														
* 205/55R16	91W	SL	BLT	112187344	222291	5.5 - 7.5	6.5	8.4	24.9	1,356	9	840	340 A A	BMW 1 SERIES (14)
225/45R18	91Y	SL	BLT	112005344	222729	7.0 - 8.5	7.5	8.9	25.9	1,356	10	806	340 A A	BMW 3 SERIES / 4 SERIES (13-18)
225/45R18	91V	SL	BLT	112031344	232663	7.0 - 8.5	7.5	8.9	25.9	1,356	10	805	340 A A	BMW X1 (13-16)
* 255/40R18	95V	SL	BLT	112199344	217523	8.5 - 10.0	9.0	10.2	26.0	1,521	11	803	340 A A	BMW X1 (11-16), BMW X1 (14-16)
255/40R18	95Y	SL	BLT	112006344	222730	8.5 - 10.0	9.0	10.2	26.0	1,521	11	803	340 A A	BMW 3 SERIES / 4 SERIES (13-18)
235/45R19	95V	SL	BLT	112014344	227807	7.5 - 9.0	8.0	9.3	27.4	1,521	10	764	340 A A	MERCEDES GLA / INFINITI QX30
255/40R19	100Y	XL	BLT	112228344	217692	8.5 - 10.0	9.0	10.2	27.0	1,764	10	773	340 A A	AUDI A6 (13-14), AUDI A7 (13-18)
* 255/50R19	103Y	SL	BLT	112068344	217245	7.0 - 9.0	8.0	10.4	29.1	1,929	11	718	340 A A	
255/45R20	101Y	SL	BLT	112126344	217246	8.0 - 9.5	8.5	10.0	29.1	1,819	9	719	340 A A	ROLLS-ROYCE GHOST (13-20)
285/40R20	104Y	SL	BLT	112185344	217239	9.5 - 11.0	10.0	11.4	29.0	1,984	11	721	340 A A	ROLLS-ROYCE GHOST (13-20)
EFFICIENTGRIP ROF SCT (SOUNDCOMFORT TECHNOLOGY)														
* 245/45R19	102Y	XL	BLT	112020391	230247	7.5 - 9.0	8.0	9.6	27.7	1,874	9	755	340 A A	MERCEDES S CLASS MAYBACH 600 X222
* 275/40R19	101Y	SL	BLT	112026391	230248	9.0 - 11.0	9.5	10.9	27.7	1,819	10	755	340 A A	MERCEDES S CLASS MAYBACH 600 X222

* Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

EFFICIENTGRIP™ PERFORMANCE ROF

EFFICIENTGRIP PERFORMANCE ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
195/55R16	87W	SL	BLT	112015379	228037	5.5 - 7.0	6.0	7.9	24.4	1,201	10	856	340 A A	COUNTRYMAN F56 (14-19)

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

EFFICIENTGRIP™ PERFORMANCE

EFFICIENTGRIP PERFORMANCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/55R17	97W	SL	BLT	112073534	241884	6.0 - 8.0	7.0	9.2	26.8	1,609	9	781	340 A A	MINI COUNTRYMAN (18-21)

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

COMMUTER TOURING



Assurance WeatherReady®	Assurance ComfortDrive™	Assurance MaxLife®	Assurance® All-Season
Predictable Control in Every Season	All The Ingredients for a Smooth Ride	Extend Your Journey	Cruise the Road
Replacement Lines			



Assurance Finesse®	Assurance Fuel Max® Assurance^{CS} Fuel Max®
Take the Road Well Traveled	Fuel Your Drive
OE Lines	

COMMUTER TOURING

	Wet Traction	Snow Traction	Ride Comfort	Quiet Ride	Fuel Efficiency
Assurance WeatherReady	9	10	9	9	8
Assurance ComfortDrive	10	7	10	10	8
Assurance MaxLife	8	9	8	8	8
Assurance All-Season	7	8	7	7	9

NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each product category. However, using the scale to distinguish between tires across different types of product categories would be misleading.

COMMUTER TOURING TIRE SELECTOR CHART

	PASSENGER/CUV	PASSENGER/CUV	PASSENGER	PASSENGER	PASSENGER/CUV	PASSENGER/CUV	PASSENGER	CUV	PASSENGER/CUV	PASSENGER
	Assurance WeatherReady® (Pg. 56)	Assurance ComfortDrive™ (Pg. 58)	Assurance® ComfortTred® Touring (Pg. 60)	Assurance® ComfortTred® (Pg. 60)	Assurance MaxLife® (Pg. 62)	Assurance Finesse® (Pg. 64)	Assurance Fuel Max® (Pg. 66)	Assurance® Fuel Max® (Pg. 68)	Assurance® All-Season (Pg. 70)	Integrity® (Pg. 72)
185/65R14									86T	
175/65R15							84H		84H	
185/55R15										82T
185/60R15									84T	
185/65R15			*86T				88H		88T	
195/60R15			*88H						88T	
195/65R15	91H		*91H		91H				91T	
205/65R15			*94H						94T	
205/70R15									96T	
205/75R15									97T	
215/65R15									96T	
215/70R15									98T	*98S
175/60R16							82H			
185/55R16									83H	
195/50R16									84V	
195/55R16	87H								87T	
205/50R16									87H	
205/55R16	91H	91H	*91H		91H		91H		91H	
205/60R16	92V	92V	*91V		92V				92T	
205/65R16	95H	95H	*95H		95H		95H		95H	
215/55R16	97H	97H	*93H		93H				93H	
215/60R16	95H	95V	*94V		95V		95H		95T	
215/65R16	98H	98V	*98T						98T	
215/70R16	100T				100H				100T	
225/55R16									95H	
225/60R16	98H		*98H		98H				98T	
225/65R16									100T	
225/70R16	103T		*103T						103T	
235/60R16			*100H						100T	
235/65R16			*103T						103T	
235/70R16									106T	
205/50R17			*89V		89V				89V	
215/45R17	87V	87V			87V				87V	
215/50R17	95V	95V	*93V		95V				91V	
215/55R17	94V	94V	*94V		94V	94H	94V		94H	
215/60R17	96H	96H	*96H		96H				96T	
215/65R17	99H		*98T		98H	99H			99T	
225/45R17		91V	*91V		91V				91V	
225/50R17	94V	94V	*94V		94V				94V	
225/55R17	97H	97V	*97V		97V	94H	97H		97T	

*Discontinued in 2020

	PASSENGER/CUV	PASSENGER/CUV	PASSENGER	PASSENGER	PASSENGER/CUV	PASSENGER	CUV	PASSENGER/CUV	PASSENGER	
	Assurance WeatherReady® (Pg. 56)	Assurance ComfortDrive™ (Pg. 58)	Assurance® ComfortTred® Touring (Pg. 60)	Assurance® ComfortTred® (Pg. 60)	Assurance MaxLife® (Pg. 62)	Assurance Finesse® (Pg. 64)	Assurance Fuel Max® (Pg. 66)	Assurance® Fuel Max® (Pg. 68)	Assurance® All-Season (Pg. 70)	Integrity® (Pg. 72)
225/60R17	99H	99H	*98H		99H				99T	
225/65R17	102H	102H	*102H		102H			102H	102T	101S
235/45R17	97V				*94V					
235/50R17	96V				96H					
235/55R17	99H	99H	*99H		99H				99T	
235/60R17	102H	102H	*102H		102H				102T	
235/65R17	104H	104H	*104H		104H				104T	
245/45R17		99V								
215/50R18						92H				
215/55R18	95H	95H	*95H		94H					
225/45R18	95V	95V			91V				91V	
225/50R18		95V	*94H							
225/55R18	98V	98V	*97H		98H				98H	
225/60R18	100H	100H	*100H		100H				100H	
235/40R18					91V					
235/45R18	94V	94V	*94V		94V				94V	
235/50R18	97V	97V			97V				97H	
235/55R18	100V	100V	*100V		100V	100H			100H	
235/60R18	103H	103V	*102V	*102T	103V				103H	
235/65R18	106H	106V	*106H		106V				106H	
245/45R18	100V	100V	*96V						96V	
245/60R18	105H	105V	*105H		105H	105H			105H	
255/55R18	109V									
255/65R18	111T							111T		
265/60R18	110H		*110H		110H					
225/55R19		99V			99V				99V	
235/40R19		96V			96V					
235/45R19	95V	95H			95H					
235/50R19	99V	99V			99V					
235/55R19	101V	101V	*101V		101V				101H	
245/55R19	103H	103V			103V				103V	
255/40R19		100V								
255/50R19	107H	107V								
255/60R19	109H				108H					
235/55R20	102H	102V			102V					
245/50R20	102H	102V	*102V		102V				102H	
255/45R20		105V								
255/50R20	109V	105V			105H	105T			105H	
255/55R20	110H	107H	*107H		107H					

*Discontinued in 2020

ASSURANCE WEATHERREADY®

Be Ready. Goodyear's Best All Weather Traction.
For Mother Nature's Worst.



FEATURES	BENEFITS
1. Weather Reactive Technology	<ul style="list-style-type: none"> • Evolving Traction® Grooves transition from deep grooves to wide grooves to help displace water on the road • 3D TredLock® Technology allows the tread to lock together while cornering and opens for more biting edges when you need enhanced wet traction
2. Asymmetric tread pattern and sweeping traction grooves	Help evacuate water
3. Soybean oil	In the rubber compound helps the tread stay pliable and grip the road in cold temperatures
4. Specialized tread compounds	Help grip the road in water, snow and ice

1. Weather Reactive Technology

BENEFITS

- Evolving Traction® Grooves transition from deep grooves to wide grooves to help displace water on the road
- 3D TredLock® Technology allows the tread to lock together while cornering and opens for more biting edges when you need enhanced wet traction

2. Asymmetric tread pattern and sweeping traction grooves

Help evacuate water


3. Soybean oil

In the rubber compound helps the tread stay pliable and grip the road in cold temperatures

4. Specialized tread compounds

Help grip the road in water, snow and ice

PERFORMANCE RATINGS

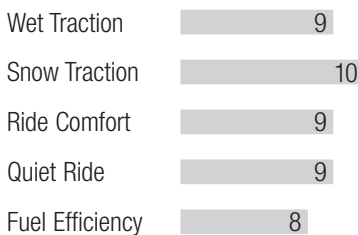

60000 *
MILE TREAD LIFE LIMITED WARRANTY

95,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



SCAN HERE FOR PRODUCT VIDEO



* See Tire-HQ™ for product warranty details.

ASSURANCE WEATHERREADY SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
195/65R15	91H	SL	VS	767489537	230529	5.5 - 7.0	6	7.9	25	1,356	10	836	700 A A
195/55R16	87H	SL	VS	767820537	230528	5.5 - 7.0	6	7.9	24.4	1,201	10	857	700 A A
205/55R16	91H	SL	VS	767524537	230530	5.5 - 7.5	6.5	8.4	24.9	1,356	10	839	700 A A
205/60R16	92V	SL	VS	767570537	230551	5.5 - 7.5	6	8.2	25.7	1,389	10	813	700 A A
205/65R16	95H	SL	VS	767780537	230552	5.5 - 7.5	6	8.2	26.5	1,521	10	789	700 A A
215/55R16	97H	XL	VS	767507537	235441	6.0 - 7.5	7	8.46	25.3	1,609	11	827	700 A A
215/60R16	95H	SL	VS	767829537	230554	6.0 - 7.5	6.5	8.7	26.1	1,521	10	801	700 A A
215/65R16	98H	SL	VS	767874537	230556	6.0 - 7.5	6.5	8.7	27	1,653	10	774	700 A A
215/70R16	100T	SL	VS	767782537	230558	5.5 - 7.0	6.5	8.7	27.9	1,764	11	749	700 A A
225/60R16	98H	SL	VS	767407537	230562	6.0 - 8.0	6.5	9	26.6	1,653	10	786	700 A A
225/70R16	103T	SL	VS	767378537	230566	6.0 - 7.5	6.5	9	28.4	1,929	11	736	700 A A
215/45R17	87V	SL	VS	767568537	230588	7.0 - 8.0	7	8.4	24.7	1,201	10	846	700 A A
215/50R17	95V	XL	VS	767966537	235442	6.0 - 7.5	7	8.46	25.5	1,521	11	819	700 A A
215/55R17	94V	SL	VS	767340537	230553	6.0 - 7.5	7	8.9	26.3	1,477	10	795	700 A A
215/60R17	96H	SL	VS	767322537	230555	6.0 - 7.5	6.5	8.7	27.2	1,565	10	768	700 A A
215/65R17	99H	SL	VS	767875537	230557	6.0 - 7.5	6.5	8.7	28	1,709	10	746	700 A A
225/50R17	94V	SL	VS	767372537	230559	6.0 - 8.0	7	9.2	25.9	1,477	10	807	700 A A
225/55R17	97H	SL	VS	767753537	230560	6.0 - 8.0	7	9.2	26.8	1,609	10	780	700 A A
225/60R17	99H	SL	VS	767366537	230563	6.0 - 8.0	6.5	9	27.6	1,709	11	757	700 A A
225/65R17	102H	SL	VS	767517537	230565	6.0 - 8.0	6.5	9	28.5	1,874	11	733	700 A A
235/45R17	97V	XL	VS	767881537	230567	7.5 - 9.0	8	9.3	25.4	1,609	10	823	700 A A
235/50R17	96V	SL	VS	767970537	235445	6.5 - 8.5	7.5	9.3	26.3	1,565	11	795	700 A A
235/55R17	99H	SL	VS	767181537	230571	6.5 - 8.5	7.5	9.7	27.2	1,709	11	768	700 A A
235/60R17	102H	SL	VS	767488537	230576	6.5 - 8.5	7	9.5	28.1	1,874	11	744	700 A A
235/65R17	104H	SL	VS	767188537	230578	6.5 - 8.5	7	9.5	29.1	1,984	11	718	700 A A
215/55R18	95H	SL	VS	767007537	237336	6.0 - 7.5	7.0	8.9	27.3	1,521	11	766	700 A A
225/45R18	95V	XL	VS	767906537	232361	7.0 - 8.5	7.5	8.9	25.9	1,521	10	807	700 A A
225/55R18	98V	SL	VS	767880537	230561	6.0 - 8.0	7	9.2	27.8	1,653	10	752	700 A A
225/60R18	100H	SL	VS	767363537	230564	6.0 - 8.0	6.5	9	28.6	1,764	11	730	700 A A
235/45R18	94V	SL	VS	767871537	230568	7.5 - 9.0	8	9.3	26.3	1,477	10	795	700 A A
235/50R18	97V	SL	VS	767876537	230570	6.5 - 8.5	7.5	9.7	27.3	1,609	10	766	700 A A
235/55R18	100V	SL	VS	767877537	230572	6.5 - 8.5	7.5	9.7	28.2	1,764	11	741	700 A A
235/60R18	103H	SL	VS	767815537	230577	6.5 - 8.5	7	9.5	29.1	1,929	11	718	700 A A
235/65R18	106H	SL	VS	767885537	230579	6.5 - 8.5	7	9.5	30	2,094	11	697	700 A A
245/45R18	100 V	XL	VS	767014537	237586	7.5 - 9.0	8.0	9.6	26.7	1,764	10	784	700 A A
245/60R18	105H	SL	VS	767819537	230583	7.0 - 8.5	7	9.8	29.6	2,039	11	706	700 A A
255/55R18	109V	XL	VS	767903537	231534	7.0 - 9.0	8	10.4	29	2,271	11	721	700 A A
255/65R18	111T	SL	VS	767894537	230586	7.0 - 9.0	7.5	10.2	31.1	2,403	11	672	700 A A
265/60R18	110H	SL	VS	767957537	237335	7.5 - 9.5	8.0	10.7	30.5	2,337	11	685	700 A A
235/45R19	95V	SL	VS	767968537	235444	7.5 - 9.0	8	9.25	27.4	1,521	11	764	700 A A
235/50R19	99 V	SL	VS	767010537	237337	6.5 - 8.5	7.5	9.7	28.3	1,709	11	738	700 A A
235/55R19	101V	SL	VS	767883537	230573	6.5 - 8.5	7.5	9.7	29.2	1,819	11	716	700 A A
245/55R19	103H	SL	VS	767890537	230582	7.0 - 8.5	7.5	10	29.7	1,929	11	704	700 A A
255/50R19	107H	XL	VS	767905537	231535	7.0 - 9.0	8	10.4	29.1	2,149	11	718	700 A A
255/60R19	109H	SL	VS	767892537	230585	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	700 A A
235/55R20	102H	SL	VS	767884537	230574	6.5 - 8.5	7.5	9.7	30.2	1,874	11	693	700 A A
245/50R20	102H	SL	VS	767870537	230581	7.0 - 8.5	7.5	10	29.7	1,874	11	704	700 A A
255/50R20	109V	XL	VS	767967537	235443	7.0 - 9.0	8	10.04	30.1	2,271	11	695	700 A A
255/55R20	110H	XL	VS	767891537	230584	7.0 - 9.0	8	10.4	31	2,337	11	674	700 A A

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.


ASSURANCE COMFORTDRIVE™

All the Ingredients for a Smooth Ride



FEATURES	BENEFITS
1. ComfortFlex™ Technology	Unique comfort inserts smooth bumps and reduce vibrations by interacting with the sidewall apex to dampen ride impacts and enhance steering control for smooth transitions in changing lanes and side-to-side maneuvers.
2. Optimized AquaChannel® Grooves	Next generation of symmetrically balanced grooves evacuate water and reduce hydroplaning for enhanced wet performance. Precise placement and design help both braking and traction by evacuating water and allowing more surfaces to grip the road.
3. Noise-reducing tread pattern	Adaptive Tread Design balances stiffness with design sequence to deliver lower noise levels and promotes even treadwear, for a quiet ride at various speeds throughout the life of the tire. Optimized Footprint distributes pressure evenly for reduced load sensitivity for more balanced treadwear, improved road contact, and lower noise as the tire wears.
4. Complex interlocking features	Located in every rib to deliver secure traction and smooth responsiveness. Evolving Traction® Grooves transition over time from narrow sipes to wide grooves to allow for water evacuation as the tire wears. TredLock® Technology grips the road when driving straight and locks together in turns and lane changes; they improve handling by adding stiffness to the tread block.
5. Tread compound featuring soybean oil	Specialized blend of dual end functionalized polymers, high silica content and soy oil delivers superior wet road performance without trade-off in treadwear, rolling resistance or cold temperatures.
6. Built-in Wear Gauge®	Allows for convenient and easy tread-depth readings so you can check wear of your tires at any time

PERFORMANCE RATINGS

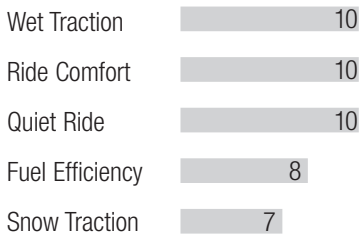

60000*
MILE TREAD LIFE LIMITED WARRANTY

95,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Comfortable, Refined Handling



Ultra Wet Traction



All-Season

* See warranty brochure for complete details.

ASSURANCE COMFORTDRIVE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
205/55R16	91H	SL	VS	413524582	239101	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840	700 A A
205/60R16	92V	SL	VS	413570582	239103	5.5 - 7.5	6	8.2	25.7	1,389	11	814	700 A A
205/65R16	95H	SL	VS	413780582	239105	5.5 - 7.5	6	8.2	26.5	1,521	11	789	700 A A
215/55R16	97H	XL	VS	413507582	239109	6.0 - 7.5	7	8.9	25.3	1,609	11	827	700 A A
215/60R16	95V	SL	VS	413571582	239113	6.0 - 7.5	6.5	8.7	26.1	1,521	11	800	700 A A
215/65R16	98V	SL	VS	413002582	239117	6.0 - 7.5	6.5	8.7	27	1,653	11	774	700 A A
215/45R17	87V	SL	VS	413032582	240425	7.0 - 8.0	7	8.4	24.7	1,201	11	846	700 A A
215/50R17	95V	XL	VS	413941582	239107	6.0 - 7.5	7	8.9	25.5	1,521	11	819	700 A A
215/55R17	94V	SL	VS	413340582	239111	6.0 - 7.5	7	8.9	26.3	1,477	11	795	700 A A
215/60R17	96H	SL	VS	413546582	239115	6.0 - 7.5	6.5	8.7	27.2	1,565	11	768	700 A A
225/45R17	91V	SL	VS	413567582	239148	7.0 - 8.5	7.5	8.9	25	1,356	11	836	700 A A
225/50R17	94V	SL	VS	413509582	239119	6.0 - 8.0	7	9.2	25.9	1,477	11	807	700 A A
225/55R17	97V	SL	VS	413502582	239123	6.0 - 8.0	7	9.2	26.8	1,609	11	781	700 A A
225/60R17	99H	SL	VS	413005582	239127	6.0 - 8.0	6.5	9	27.6	1,709	11	756	700 A A
225/65R17	102H	SL	VS	413517582	239131	6.0 - 8.0	6.5	9	28.5	1,874	11	733	700 A A
235/55R17	99H	SL	VS	413319582	239135	6.5 - 8.5	7.5	9.7	27.2	1,709	11	769	700 A A
235/60R17	102H	SL	VS	413488582	239142	6.5 - 8.5	7	9.5	28.1	1,874	11	744	700 A A
235/65R17	104H	SL	VS	413188582	239140	6.5 - 8.5	7	9.5	29.1	1,984	11	719	700 A A
245/45R17	99V	XL	VS	413027582	239187	7.5 - 9.0	8.0	9.6	25.7	1,709	11	814	700 A A
215/55R18	95H	SL	VS	413810582	239160	6.0 - 7.5	7	8.9	27.3	1,521	11	766	700 A A
225/45R18	95V	XL	VS	413017582	239169	7.0 - 8.5	7.5	8.9	25.9	1,521	11	807	700 A A
225/50R18	95V	SL	VS	413003582	239121	6.0 - 8.0	7	9.2	26.9	1,521	11	777	700 A A
225/55R18	98V	SL	VS	413033582	240524	6.0 - 8.0	7	9.2	27.8	1,653	11	753	700 A A
225/60R18	100H	SL	VS	413363582	239129	6.0 - 8.0	6.5	9	28.6	1,764	11	730	700 A A
235/45R18	94V	SL	VS	413871582	239133	7.5 - 9.0	8	9.3	26.3	1,477	11	793	700 A A
235/50R18	97V	SL	VS	413018582	239172	6.5 - 8.5	7.5	9.7	27.3	1,609	11	766	700 A A
235/55R18	100V	SL	VS	413496582	239137	6.5 - 8.5	7.5	9.7	28.2	1,764	11	739	700 A A
235/60R18	103V	SL	VS	413006582	239144	6.5 - 8.5	7	9.5	29.1	1,929	11	718	700 A A
235/65R18	106V	SL	VS	413011582	239150	6.5 - 8.5	7	9.5	30	2,094	11	696	700 A A
245/45R18	100V	XL	VS	413010582	239146	7.5 - 9.0	8	9.6	26.7	1,764	11	784	700 A A
245/60R18	105V	SL	VS	413012582	239152	7.0 - 8.5	7	9.8	29.6	2,039	11	707	700 A A
225/55R19	99V	SL	VS	413019582	239175	6.0 - 8.0	7	9.2	28.8	1,709	11	728	700 A A
235/40R19	96V	XL	VS	413021582	239181	8.0 - 9.5	8.5	9.5	26.4	1,565	11	792	700 A A
235/45R19	95H	SL	VS	413025582	239185	7.5 - 9.0	8	9.3	27.4	1,521	11	763	700 A A
235/50R19	99V	SL	VS	413024582	239184	6.5 - 8.5	7.5	9.6	28.3	1,709	11	739	700 A A
235/55R19	101V	SL	VS	413965582	239163	6.5 - 8.5	7.5	9.6	29.2	1,819	11	716	700 A A
245/55R19	103V	SL	VS	413014582	239154	7.0 - 8.5	7.5	10	29.6	1,929	11	706	700 A A
255/40R19	100V	XL	VS	413028582	239188	8.5 - 10.0	9	10.2	27	1,764	11	773	700 A A
255/50R19	107V	XL	VS	413031582	239190	7.0 - 9.0	8	10.4	29.1	2,149	11	719	700 A A
235/55R20	102V	SL	VS	413022582	239183	6.5 - 8.5	7.5	9.7	30.2	1,874	11	692	700 A A
245/50R20	102V	SL	VS	413927582	239156	7.0 - 8.5	7.5	10	29.7	1,874	11	704	700 A A
255/45R20	105V	XL	VS	413030582	239189	8.0 - 9.5	8.5	10	29.1	2,039	11	719	700 A A
255/50R20	109V	XL	VS	413020582	239179	7.0 - 9.0	8	10.4	30.1	2,039	11	695	700 A A
255/55R20	107H	SL	VS	413929582	239158	7.0 - 9.0	8	10.4	31	2,149	11	674	700 A A

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



ASSURANCE COMFORTRED® TOURING

Smooth Ride with Refined Handling Plus Confident Traction in Changing Weather Conditions



FEATURES	BENEFITS
1. Dual Comfort Zones in the tread and sidewall	Help optimize comfort and handling
2. A special Comfort Layer in the tread	Helps provide a smooth, comfortable ride
3. ComfortEdge sidewalls	Help provide a versatile balance of comfort and handling
4. An asymmetric tread	Helps provide refined handling and confident wet traction
5. Wide circumferential grooves	Help evacuate water away from the tread for traction on wet roads

T- & H-Speed Rated Only



130,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



V-Speed Rated Only



110,000 Kilometre
Tread Life
Limited Warranty



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

ASSURANCE COMFORTRED TOURING SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG
* P185/65R15	86T	SL	VS	413393329	215872	5.0 - 6.5	5.5	7.4	24.5	1,168	11	856	740 A B
* 195/60R15	88H	SL	VS	413490329	215880	5.5 - 7.0	6	7.9	24.2	1,235	11	864	740 A B
* 195/65R15	91H	SL	VS	413489329	215879	5.5 - 7.0	6	7.9	25	1,356	11	836	740 A B
* 205/65R15	94H	SL	VS	413403329	215873	5.5 - 7.5	6	8.3	25.5	1,477	11	820	740 A B
* 205/55R16	91H	SL	VS	413524329	216497	5.5 - 7.5	6.5	8.4	24.9	1,356	11	840	740 A B
* P205/60R16	91V	SL	VS	413500329	215885	5.5 - 7.5	6	8.2	25.7	1,356	11	814	640 A B
* 205/65R16	95H	SL	VS	413780329	225884	5.5 - 7.5	6	8.2	26.5	1,521	11	789	740 A B
* 215/55R16	93H	SL	VS	413525329	216498	6.0 - 7.5	7	8.9	25.3	1,433	11	827	740 A B
* P215/60R16	94V	SL	VS	413499329	215884	6.0 - 7.5	6.5	8.7	26.1	1,477	11	800	640 A B
* 215/65R16	98T	SL	VS	413382329	215867	6.0 - 7.5	6.5	8.7	27	1,653	11	774	740 A B
* 225/60R16	98H	SL	VS	413407329	215875	6.0 - 8.0	6.5	9	26.6	1,653	12	785	740 A B
* 225/70R16	103T	SL	VS	413378329	215864	6.0 - 7.5	6.5	9	28.4	1,929	12	736	740 A B
* 235/60R16	100H	SL	VS	413486329	215876	6.5 - 8.5	7	9.5	27.1	1,764	11	772	740 A B
* 235/65R16	103T	SL	VS	413207329	215865	6.5 - 8.5	7	9.5	28	1,929	11	746	740 A B
* 205/50R17	89V	SL	VS	413582329	216599	5.5 - 7.5	6.5	8.4	25.1	1,279	11	832	640 A B
* P215/50R17	93V	XL	VS	413511329	215890	6.0 - 7.5	7	8.9	25.5	1,433	11	819	640 A B
* 215/55R17	94V	SL	VS	413497329	215883	6.0 - 7.5	7	8.9	26.3	1,477	11	795	640 A B
* 215/60R17	96H	SL	VS	413322329	215863	6.0 - 7.5	6.5	8.7	27.2	1,565	11	768	740 A B
* P215/65R17	98T	SL	VS	413385329	215870	6.0 - 7.5	6.5	8.7	28	1,653	11	746	740 A B
* 225/45R17	91V	SL	VS	413567329	225883	7.0 - 8.5	7.5	8.9	25	1,356	11	836	640 A B
* 225/50R17	94V	SL	VS	413509329	215889	6.0 - 8.0	7	9.2	25.9	1,477	11	807	640 A B
* 225/55R17	97V	SL	VS	413502329	215886	6.0 - 8.0	7	9.2	26.8	1,609	11	781	640 A B
* P225/60R17	98H	SL	VS	413487329	215877	6.0 - 8.0	6.5	9	27.6	1,653	12	756	740 A B
* 225/65R17	102H	SL	VS	413517329	215893	6.0 - 8.0	6.5	9	28.5	1,874	12	733	740 A B
* 235/55R17	99H	SL	VS	413319329	215862	6.5 - 8.5	7.5	9.7	27.2	1,709	11	769	740 A B
* 235/60R17	102H	SL	VS	413488329	215878	6.5 - 8.5	7	9.5	28.1	1,874	11	744	740 A B
* 235/65R17	104H	SL	VS	413188329	215868	6.5 - 8.5	7	9.5	29.1	1,984	11	719	740 A B
* 215/55R18	95H	SL	VS	413810329	235439	6.0 - 7.5	7	8.5	27.3	1,521	11	766	740 A B
* P225/50R18	94H	SL	VS	413513329	215891	6.0 - 8.0	7	9.2	26.9	1,477	11	777	740 A B
* P225/55R18	97H	SL	VS	413383329	215869	6.0 - 8.0	7	9.2	27.8	1,609	11	753	740 A B
* 225/60R18	100H	SL	VS	413363329	235436	6.0 - 8.0	6.5	8.9	28.6	1,764	12	730	740 A B
* 235/45R18	94V	SL	VS	413871329	235435	7.5 - 9.0	8	9.3	26.3	1,477	11	793	640 A B
* 235/55R18	100V	SL	VS	413496329	215882	6.5 - 8.5	7.5	9.7	28.2	1,764	11	739	640 A B
* P235/60R18	102V	SL	VS	413495329	215881	6.5 - 8.5	7	9.5	29.1	1,874	11	718	640 A B
* 235/65R18	106H	SL	VS	413885329	235433	6.5 - 8.5	7	9.3	30.1	2,094	12	696	740 A B
* 245/45R18	96V	SL	VS	413516329	215892	7.5 - 9.0	8	9.6	26.7	1,565	11	784	640 A B
* 245/60R18	105H	SL	VS	413819329	235432	7.0 - 8.5	7	9.7	29.6	2,039	12	707	740 A B
* 265/60R18	110H	SL	VS	413957329	235437	7.5 - 9.5	8	10.4	30.5	2,337	12	685	740 A B
* 235/55R19	101V	SL	VS	413965329	235431	6.5 - 8.5	7.5	9.3	29.2	1,819	12	716	640 A B
* 245/50R20	102V	SL	VS	413927329	235438	7.0 - 8.5	7.5	9.6	29.7	1,874	12	704	640 A B
* 255/55R20	107H	SL	VS	413929329	235434	7.0 - 9.0	8	10.1	30.1	2,149	12	695	740 A B

*Discontinued 2020

ASSURANCE COMFORTRED SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* P235/60R18	102T	SL	VS	413215507	204658	6.5 - 8.5	7	9.5	29.1	1,874	10	718	700 A B	FORD FLEX (13-19)

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



ASSURANCE MAXLIFE®

MaxLife®. Extend Your Journey.
Go Up To 30% Farther† with Goodyear's Longest Lasting Tire.



FEATURES BENEFITS

1. TREDLIFE TECHNOLOGY

- Enhanced tread compound
- Engineered tread pattern geometry

2. Wide circumferential grooves

3. Multiple biting edges

4. Solid shoulder blocks

5. Built-in wear gauges

Provides extended all-season reliability

Delivers maximum wear performance

Evacuate water from the tread for greater control on wet roads

Provide traction in rain and light snow

Stabilize the tread footprint for confident handling and even wear

Allow for convenient and easy tread-depth readings so you can check wear of your tires at any time

PERFORMANCE RATINGS

Wet Traction	8
Snow Traction	9
Ride Comfort	8
Quiet Ride	8
Fuel Efficiency	8

85000*
MILE TREAD LIFE LIMITED WARRANTY

140,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



All-Season

† 30% more miles based on Goodyear Assurance MaxLife 85,000 Mile Tread Life Limited Warranty, as compared to Goodyear Assurance® All-Season 65,000 Mile Tread Life Limited Warranty.

* See warranty brochure for complete details.

ASSURANCE MAXLIFE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
195/65R15	91H	SL	VS	110489545	234344	5.5 - 7.0	6	7.9	25	1,356	11	836	820 A B
205/55R16	91H	SL	VS	110952545	234340	5.5 - 7.5	6.5	8.4	24.9	1,356	11	839	820 A B
205/60R16	92V	SL	VS	110953545	234341	5.5 - 7.5	6	8.2	25.7	1,389	11	813	820 A B
205/65R16	95H	SL	VS	110780545	234342	5.5 - 7.5	6	8.2	26.5	1,521	11	789	820 A B
215/55R16	93H	SL	VS	110951545	234339	6.0 - 7.5	7	8.9	25.3	1,433	11	826	820 A B
215/60R16	95V	SL	VS	110571545	235619	6.0 - 7.5	6.5	8.7	26.1	1,521	11	801	820 A B
215/70R16	100H	SL	VS	110954545	234343	5.5 - 7.0	6.5	8.7	27.9	1,764	12	749	820 A B
225/60R16	98H	SL	VS	110407545	235160	6.0 - 8.0	6.5	9	26.6	1,653	12	786	820 A B
205/50R17	93V	SL	VS	110980545	235615	5.5 - 7.5	6.5	8.4	25.1	1,433	11	833	820 A B
215/45R17	87V	SL	VS	110947545	234336	7.0 - 8.0	7	8.4	24.7	1,201	11	846	820 A B
215/50R17	95V	XL	VS	110977545	235612	6.0 - 7.5	7	8.9	25.5	1,521	11	820	820 A B
215/55R17	94V	SL	VS	110340545	235617	6.0 - 7.5	7	8.9	26.3	1,477	11	795	820 A B
215/60R17	96H	SL	VS	110322545	237339	6.0 - 7.5	6.5	8.7	27.1	1,565	11	769	820 A B
225/45R17	91V	SL	VS	110567545	235618	7.0 - 8.5	7.5	8.9	25	1,356	11	836	820 A B
225/50R17	94V	SL	VS	110982545	235620	6.0 - 8.0	7	9.2	25.9	1,477	11	807	820 A B
225/55R17	97V	SL	VS	110502545	234348	6.0 - 8.0	7	9.2	26.8	1,609	11	780	820 A B
225/60R17	99H	SL	VS	110979545	235614	6.0 - 8.0	6.5	9	27.6	1,709	11	757	820 A B
225/65R17	102H	SL	VS	110981545	235616	6.0 - 8.0	6.5	9	28.5	1,874	11	733	820 A B
*235/45R17	94V	SL	VS	110996545	236675	7.5 - 9.0	8	9.3	25.4	1,477	11	823	820 A B
235/50R17	96H	SL	VS	110956545	234346	6.5 - 8.5	7.5	9.7	26.3	1,565	11	795	820 A B
235/55R17	99H	SL	VS	110319545	235251	6.5 - 8.5	7.5	9.7	27.2	1,709	11	768	820 A B
235/60R17	102H	SL	VS	110488545	234332	6.5 - 8.5	7	9.5	28.1	1,874	11	744	820 A B
235/65R17	104H	SL	VS	110188545	234330	6.5 - 8.5	7	9.5	29.1	1,984	11	718	820 A B
P215/65R17	98H	SL	VS	110943545	234328	6.0 - 7.5	6.5	8.7	28	1,653	11	746	820 A B
225/45R18	91V	SL	VS	110938545	234321	7.0 - 8.5	7.5	8.9	25.9	1,356	11	807	820 A B
225/55R18	98H	SL	VS	110935545	234316	6.0 - 8.0	7	9.2	27.8	1,653	11	752	820 A B
225/60R18	100H	SL	VS	110363545	234318	6.0 - 8.0	6.5	9	28.6	1,764	11	731	820 A B
235/40R18	91V	SL	VS	110940545	234323	8.0 - 9.5	8.5	9.5	25.4	1,356	11	823	820 A B
235/45R18	94V	SL	VS	110936545	234319	7.5 - 9.0	8	9.3	26.3	1,477	11	795	820 A B
235/50R18	97V	SL	VS	110876545	234349	6.5 - 8.5	7.5	9.7	27.3	1,609	11	766	820 A B
235/55R18	100V	SL	VS	110496545	234314	6.5 - 8.5	7.5	9.7	28.2	1,764	11	741	820 A B
235/60R18	103V	SL	VS	110934545	234315	6.5 - 8.5	7	9.5	29.1	1,929	11	718	820 A B
235/65R18	106V	SL	VS	110022545	239568	6.5 - 8.5	7	9.5	30	2,094	12	697	820 A B
245/60R18	105H	SL	VS	110819545	234320	7.0 - 8.5	7	9.8	29.6	2,039	12	706	820 A B
265/60R18	110H	SL	VS	110957545	234347	7.5 - 9.5	8	10.7	30.5	2,337	12	685	820 A B
P215/55R18	94H	SL	VS	110939545	234322	6.0 - 7.5	7	8.9	27.3	1,477	11	766	820 A B
225/55R19	99V	SL	VS	110930545	234269	6.0 - 8.0	7	9.1	28.7	1,709	11	728	820 A B
235/40R19	96V	XL	VS	110918545	234311	8.0 - 9.5	8.5	9.5	26.4	1,565	11	792	820 A B
235/45R19	95H	SL	VS	110931545	234270	7.5 - 9.0	8	9.3	27.4	1,521	11	763	820 A B
235/50R19	99V	SL	VS	110933545	234313	6.5 - 8.5	7.5	9.6	28.3	1,709	11	739	820 A B
235/55R19	101V	SL	VS	110883545	234268	6.5 - 8.5	7.5	9.7	29.2	1,819	12	716	820 A B
245/55R19	103V	SL	VS	110971545	235098	7.0 - 8.5	7.5	10	29.6	1,929	11	706	820 A B
P255/60R19	108H	SL	VS	110932545	234312	7.0 - 9.0	7.5	10.2	31.1	2,205	11	672	820 A B
235/55R20	102V	SL	VS	110928545	234266	6.5 - 8.5	7.5	9.7	30.2	1,874	12	692	820 A B
245/50R20	102V	SL	VS	110927545	234265	7.0 - 8.5	7.5	10	29.7	1,874	12	704	820 A B
255/50R20	105H	SL	VS	110002545	237340	7.0 - 9.0	8	10.43	30	2,039	12	695	820 A B
255/55R20	107H	SL	VS	110929545	234267	7.0 - 9.0	8	10.4	31	2,149	12	674	820 A B

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

COMMUTER TOURING

ASSURANCE FINESSE™

Premium Ride Quality with Confident All-Season Traction
and Enhanced Fuel Efficiency



FEATURES	BENEFITS
1. Patented tread pattern	Provides a comfortable and quiet ride
2. Efficient fuel-saving tread compound	Offers grip in wet, dry, snow and ice
3. Specially formulated rubber compound and tread features	Low rolling resistance, for eco-friendly driving
4. Optimized road contact	Provides reliable tread life

**ADDITIONAL
POST-PURCHASE
PROGRAMS:**

- Nationwide Warranty Service
- Online Tire Registration



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See Tire-HQ™ for product warranty details.

ASSURANCE FINESSE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
215/55R17	94H	SL	VSB	681213566	240187	6.0 - 7.5	7.0	8.9	26.3	1,477	9	795	540 A A	VOLKSWAGEN TAOS (22)
215/65R17	99H	SL	VSB	681875566	237133	6.0 - 7.5	6.5	8.7	28.0	1,709	10	746	540 A A	VOLKSWAGEN TIGUAN (19-21)
225/55R17	97H	SL	VSB	681028566	240189	6.0 - 8.0	7.0	9.2	26.8	1,609	9	780	540 A A	VOLKSWAGEN TAOS (22)
215/50R18	92H	SL	VSB	681030566	240221	6.0 - 7.5	7.0	8.9	26.5	1,389	9	789	540 A A	VOLKSWAGEN TAOS (22)
235/55R18	100H	SL	VSB	681800566	237134	6.5 - 8.5	7.5	9.7	28.2	1,764	10	742	540 A A	VOLKSWAGEN TIGUAN (19-21)
245/60R18	105T	SL	VSB	681819566	235093	7.0 - 8.5	8.0	10.4	29.6	2,039	10	706	540 A A	VOLKSWAGEN ATLAS / ATLAS CROSS SPORT (20-21)
255/50R20	105T	SL	VSB	681004566	235091	7.0 - 9.0	8.0	10.6	30.2	2,039	10	694	540 A A	VOLKSWAGEN ATLAS / ATLAS CROSS SPORT (20-21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



ASSURANCE FUEL MAX®

Enhanced Fuel Savings Plus Confident Traction in Changing Weather Conditions



FEATURES	BENEFITS
1. Fuel-saving tread compound	Helps reduce energy loss as the tire rolls to save gas over the life of a set of four tires
2. Wet Tread Zone with Dual AquaChannel® Grooves	Helps evacuate water away from the treadface for great traction on wet roads
3. Dry Tread Zone with solid shoulder blocks	Helps enhance handling and grip for confident maneuvering on dry pavement
4. Zigzag microgrooves and center tread notches	Help grip the road in rain and light snow for all-season performance
5. Circumferential shoulder grooves	Help promote even wear and provide biting edges for traction in wet weather

65000*
MILE TREAD LIFE
LIMITED WARRANTY

105,000 Kilometre
Tread Life
Limited Warranty

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Fuel Efficiency



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

ASSURANCE FUEL MAX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P175/65R15	84H	SL	VS	738609571	220571	5.0 - 6.0	5	7	24	1,102	10	872	580 A A	TOYOTA PRIUS C (13-19), TOYOTA YARIS (13-18)
185/65R15	88H	SL	VS	738523571	216377	5.0 - 6.5	5.5	7.4	24.5	1,235	10	855	580 A A	
175/60R16	82H	SL	VS	738529571	217645	5.0 - 6.0	5	7	24.3	1,047	10	860	580 A A	SCION iQ (13-15)
205/55R16	91H	SL	VS	738524571	224853	5.5 - 7.5	6.5	8.4	24.9	1,356	9	839	580 A A	CHEVROLET BOLT (18-21), CHEVROLET CRUZE (15-19)
205/65R16	95H	SL	VS	738002571	233108	5.5 - 7.5	6	8.2	26.5	1,477	10	790	580 A A	HYUNDAI SONATA (20-21)
205/65R16	95H	SL	VS	738003571	237059	5.5-7.5	6.0	8.2	26.5	1,521	9	790	580 A A	HYUNDAI SONATA (20-21)
215/60R16	95H	SL	VS	738704571	218911	6.0 - 7.5	6.5	8.7	26.1	1,521	10	800	580 A A	FORD FUSION (13-20)
P215/55R17	94V	SL	VS	738735571	219827	6.0 - 7.5	7	8.9	26.3	1,477	9	795	580 A A	
225/55R17	97V	SL	VS	738754571	223003	6.0 - 8.0	7	9.2	26.8	1,609	10	781	580 A A	SUBARU LEGACY (15-19)
P225/55R17	95H	SL	VS	738828571	225531	6.0 - 8.0	7	9.2	26.8	1,521	9	781	580 A A	BUICK REGAL (18-20), CHEVROLET MALIBU (16-21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ASSURANCE^{CS} FUEL MAX[®]

Enhanced Fuel Savings Plus Confident Traction in Changing Weather Conditions



FEATURES	BENEFITS
1. Fuel-saving tread compound	Helps reduce energy loss as the tire rolls to save gas over the life of a set of four tires
2. Wet Tread Zone with Dual AquaChannel [®] Grooves	Enhances water evacuation off the tread for gripping power on wet roads
3. Optimized construction	Helps provide consistent traction and wear in a wide range of loading conditions

65000 *
MILE TREAD LIFE
LIMITED WARRANTY

105,000 Kilometre
Tread Life
Limited Warranty

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



On-Road



Fuel Efficiency



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

ASSURANCE^{CS} FUEL MAX SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/65R17	102H	SL	VSB	755667383	222526	6.0 - 8.0	6.5	9	28.5	1,874	10	733	600 A B	NISSAN ROGUE (14-20)
255/65R18	111T	SL	VSB	755907383	233322	7.0 - 9.0	8	10.4	29	2,403	10	720	600 A B	BUICK ENCLAVE (18-21), CHEVROLET TRAVERSE (18-21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.


ASSURANCE® ALL-SEASON

A Practical Tire for Confident All-Season Traction in Wet, Dry and Snowy Conditions, with Long-Lasting Treadwear



FEATURES	BENEFITS
1. Multiple biting edges	Offer great all-season traction in wet, dry and snowy conditions
2. Wide tread grooves	Help evacuate water and slush for enhanced wet traction
3. Optimized tread pattern	Reduces road noise for a quieter ride
4. Large stable shoulder blocks	For confident dry and wet handling

PERFORMANCE RATINGS

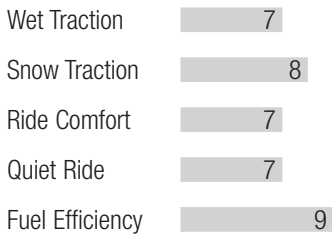

65000*
MILE TREAD LIFE
LIMITED WARRANTY

105,000 Kilometre
Tread Life
Limited Warranty

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season

* See warranty brochure for complete details.

ASSURANCE ALL-SEASON SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
185/65R14	86T	SL	VS	407106374	224948	5.0 - 6.5	5.5	7.4	23.5	1,168	9	889	600 A B
175/65R15	84H	SL	VS	407955374	236543	5.0 - 6.0	5	6.97	23.98	1,102	9	872	600 A B
185/60R15	84T	SL	VS	407739374	224956	5.0 - 6.5	5.5	7.5	23.8	1,102	9	878	600 A B
185/65R15	88T	SL	VS	407259374	224943	5.0 - 6.5	5.5	7.4	24.5	1,235	9	853	600 A B
195/60R15	88T	SL	VS	407740374	224937	5.5 - 7.0	6	7.9	24.2	1,235	9	864	600 A B
195/65R15	91T	SL	VS	407477374	224932	5.5 - 7.0	6	7.9	25	1,356	9	836	600 A B
205/65R15	94T	SL	VS	407478374	224946	5.5 - 7.5	6	8.3	25.5	1,477	9	820	600 A B
205/70R15	96T	SL	VS	407785374	224952	5.0 - 7.0	6	8.2	26.3	1,565	9	795	600 A B
205/75R15	97T	SL	VS	407789374	226975	5.0 - 7.0	5.5	8	27.1	1,609	9	771	600 A B
215/65R15	96T	SL	VS	407007374	240203	6.0 - 7.5	6.5	8.7	26	1,565	9	804	600 A B
215/70R15	98T	SL	VS	407783374	224945	5.5 - 7.0	6.5	8.7	26.9	1,653	9	777	600 A B
185/55R16	83H	SL	VS	407001374	236544	5.0 - 6.5	6	7.64	24.02	1,074	9	870	600 A B
195/50R16	84V	SL	VS	407002374	236545	5.5 - 7.0	6	7.91	23.7	1,102	9	882	600 A B
195/55R16	87T	SL	VS	407787374	224955	5.5 - 7.0	6	7.9	24.4	1,201	9	857	600 A B
205/50R16	87H	SL	VS	407788374	226973	5.5 - 7.5	6.5	8.4	24.1	1,201	9	867	600 A B
205/55R16	91H	SL	VS	407781374	224930	5.5 - 7.5	6.5	8.4	24.9	1,356	9	839	600 A B
205/60R16	92T	SL	VS	407212374	224939	5.5 - 7.5	6	8.2	25.7	1,389	9	813	600 A B
205/65R16	95H	SL	VS	407780374	226974	5.5 - 7.5	6	8.2	26.5	1,521	9	789	600 A B
215/55R16	93H	SL	VS	407525374	226977	6.0 - 7.5	7	8.9	25.3	1,433	9	827	600 A B
215/60R16	95T	SL	VS	407562374	224931	6.0 - 7.5	6.5	8.7	26.1	1,521	9	801	600 A B
215/65R16	98T	SL	VS	407016374	224947	6.0 - 7.5	6.5	8.7	27	1,653	9	774	600 A B
215/70R16	100T	SL	VS	407782374	224938	5.5 - 7.0	6.5	8.7	27.9	1,764	9	749	600 A B
225/55R16	95H	SL	VS	407165374	226991	6.0 - 8.0	7	9.2	25.8	1,521	9	810	600 A B
225/60R16	98T	SL	VS	407715374	224936	6.0 - 8.0	6.5	9	26.6	1,653	9	786	600 A B
225/65R16	100T	SL	VS	407786374	224953	6.0 - 8.0	6.5	9	27.5	1,764	9	760	600 A B
225/70R16	103T	SL	VS	407378374	226993	6.0 - 7.5	6.5	9	28.4	1,929	9	736	600 A B
235/60R16	100T	SL	VS	407784374	224951	6.5 - 8.5	7	9.5	27.1	1,764	9	771	600 A B
235/65R16	103T	SL	VS	407207374	224944	6.5 - 8.5	7	9.5	28	1,929	9	746	600 A B
235/70R16	106T	SL	VS	407866374	232861	6.0 - 8.0	7	9.5	29	2,094	9	721	600 A B
205/50R17	89V	SL	VS	407582374	234167	5.5 - 7.5	6.5	8.4	25.1	1,279	9	832	600 A B
215/45R17	87V	SL	VS	407568374	236547	7.0 - 8.0	7	8.39	24.65	1,201	9	848	600 A B
215/50R17	91H	SL	VS	407790374	226976	6.0 - 7.5	7	8.9	25.5	1,356	9	820	600 A B
215/55R17	94H	SL	VS	407213374	224933	6.0 - 7.5	7	8.9	26.3	1,477	9	795	600 A B
215/60R17	96T	SL	VS	407348374	224954	6.0 - 7.5	6.5	8.7	27.2	1,565	9	768	600 A B
215/65R17	99T	SL	VS	407719374	226979	6.0 - 7.5	6.5	8.7	28	1,709	9	746	600 A B
225/45R17	91V	SL	VS	407003374	236546	7.0 - 8.5	7.5	8.86	24.96	1,356	9	837	600 A B
225/50R17	94V	SL	VS	407372374	229734	6.0 - 7.5	7	8.9	25.5	1,356	9	820	600 A B
225/55R17	97T	SL	VS	407726374	224941	6.0 - 8.0	7	9.2	26.8	1,609	9	780	600 A B
225/60R17	99T	SL	VS	407723374	224940	6.0 - 8.0	6.5	9	27.6	1,709	9	757	600 A B
225/65R17	102T	SL	VS	407285374	224934	6.0 - 8.0	6.5	9	28.5	1,874	9	733	600 A B
235/55R17	99T	SL	VS	407599374	226994	6.5 - 8.5	7.5	9.7	27.2	1,709	9	768	600 A B
235/60R17	102T	SL	VS	407323374	224950	6.5 - 8.5	7	9.5	28.1	1,874	9	744	600 A B
235/65R17	104T	SL	VS	407722374	224942	6.5 - 8.5	7	9.5	29.1	1,984	9	718	600 A B
225/45R18	91V	SL	VS	407938374	236631	7.0 - 8.5	7.5	8.86	25.94	1,356	9	806	600 A B
225/55R18	98H	SL	VS	407867374	232863	6.0 - 8.0	7	9.2	27.8	1,653	9	752	600 A B
225/60R18	100H	SL	VS	407795374	226992	6.0 - 8.0	6.5	9	28.6	1,764	9	731	600 A B
235/45R18	94V	SL	VS	407991374	236634	7.5 - 9.0	8	9.29	26.34	1,477	9	793	600 A B
235/50R18	97H	SL	VS	407004374	236550	6.5 - 8.5	7.5	9.65	27.28	1,609	10	766	600 A B
235/55R18	100H	SL	VS	407826374	232862	6.0 - 8.0	7	9.5	29	1,764	9	721	600 A B
235/60R18	103H	SL	VS	407815374	236549	6.5 - 8.5	7	9.45	29.09	1,929	9	718	600 A B
235/65R18	106H	SL	VS	407885374	236632	6.5 - 8.5	7	9.45	30.04	2,094	9	696	600 A B
245/45R18	96V	SL	VS	407005374	236633	7.5 - 9.0	8	9.57	26.65	1,565	10	784	600 A B
245/60R18	105H	SL	VS	407819374	236639	7.0 - 8.5	7	9.76	29.57	2,039	10	707	600 A B
225/55R19	99V	SL	VS	407930374	236635	6.0 - 8.0	7	9.17	28.78	1,709	9	726	600 A B
235/55R19	101H	SL	VS	407924374	234168	6.5 - 8.5	7.5	9.7	29.2	1,819	9	717	600 A B
245/55R19	103V	SL	VS	407971374	236638	7.0 - 8.5	7.5	9.96	29.65	1,929	10	705	600 A B
245/50R20	102H	SL	VS	407870374	236636	7.0 - 8.5	7.5	9.96	29.69	1,874	9	704	600 A B
255/50R20	105H	SL	VS	407006374	236637	7.0 - 9.0	8	10.43	30.08	2,039	9	695	600 A B

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

INTEGRITY®

A Quality Tire for Everyday Driving That Helps Provide Sturdy All-Season Traction



FEATURES	BENEFITS
1. Solid centerline rib	Helps provide a quiet ride and enhanced tread life
2. High-tensile steel belts	Offer enhanced toughness and reliability
3. All-season tread compound	Helps provide good traction

50000*
MILE TREAD LIFE
LIMITED WARRANTY

80,000 Kilometre
Tread Life
Limited Warranty

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Season



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

INTEGRITY SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
185/55R15	82T	SL	VSB	402602047	217110	5.0 - 6.5	5	7.6	23	1,047	9	908	460 A B	CHEVROLET SPARK (13-17)
* 215/70R15	98S	SL	VSB	402282047	205060	5.5 - 7.0	6.5	8.7	26.9	1,653	10	777	460 A B	CHRYSLER TOWN & COUNTRY, DODGE CARAVAN (06-07)
225/65R17	101S	SL	VSB	402479047	187258	6.0 - 8.0	6.5	9	28.5	1,819	10	733	460 A B	LEXUS RX (04-09), TOYOTA HIGHLANDER (04-07)

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

CONVENIENCE SPARES

CONVENIENCE SPARES SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	ORIGINAL EQUIPMENT FITMENT
T135/70D17	92M	LL	BSL	818401450	203037	4.0 - 4.0	4	5.4	24.5	1,874	5	853	NISSAN SENTRA (07-12), NISSAN JUKE (14-19)
T135/80D17	103M	SL	BSL	818150253	191855	4.0 - 4.0	4	5.4	25.5	1,929	4	808	HONDA ODYSSEY (05-20), HONDA ACCORD (05-20)
T135/90D17	104M	SL	SBL	818052253	191208	4.0 - 4.5	4	5.3	26.6	1,984	4	782	CHRYSLER 300/DODGE CHALLENGER (05-20)
T145/80D17	97M	LL	SBL	818001262	221509	4.0 - 4.0	4	5.7	26.1	1,609	4	790	DODGE GRAND CARAVAN, CHRYSLER TOWN & COUNTRY (13-20)
T155/70D17	110M	SL	SBL	818024253	205334	4.0 - 4.0	4	6.0	25.6	2,337	5	837	TOYOTA CAMRY (08-20), TOYOTA AVALON (08-20), SUBARU LEGACY (15-20)
T155/80D17	101M	LL	SBL	818006253	233509	4.0 - 5.5	4	5.9	26.7	1,819	5	781	SUBARU OUTBACK PBF4 (20)
T165/80D17	104M	LL	SBL	818002262	222644	4.0 - 4.0	4	6.3	27.4	1,984	5	754	JEEP CHEROKEE (14-20)
T165/80D17	104M	LL	BL	818370253	199157	4.0 - 4.0	4	6.3	27.4	1,984	5	754	HONDA CRV (11-16), ACURA RDX (06-12), HONDA PILOT (08-20), ACURA MDX (08-20)
T145/80D18	99M	LL	SBL	818022253	191206	4.0 - 4.5	4	5.7	27.2	1,709	4	765	CHRYSLER 300/DODGE CHALLENGER (05-20)
T155/85D18	115M	SL	SBL	818027253	235910	4.0 - 5.0	4.5	6.2	28.4	2,679	5	732	ACURA MDX (21), HONDA PILOT (21)
T175/90D18	111M	LL	BSL	818025267	215198	4.5 - 4.5	4.5	6.8	30.4	2,403	4	684	JEEP GRAND CHEROKEE, DODGE DURANGO, JEEP GRAND WAGONEER (11-20)

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ALL-TERRAIN



Wrangler SR-A®	Wrangler Fortitude HT®	Wrangler® All-Terrain Adventure With Kevlar®	Wrangler TrailRunner AT®	Wrangler DuraTrac®	Wrangler MT/R® With Kevlar®
A Trusted Tire Offering a Smooth, Quiet Ride	Strength to Tackle the Demands of Your Day, Every Day	A Versatile Tire with Rugged Strength for Quiet On-Road Driving and Going Off-Road at a Moment's Notice	A Tough, Dependable Tire with a Hardworking Combination of On- and Off-Road Performance	A Versatile Tire for Tough Off-Road Terrain and Snow That Offers Long Tread Life	An Extreme Off-Road Expedition Tire for Powering Over Rocks, Mud and Sand

	Dry Traction	Wet Traction	Snow Traction	Off-Road Traction	Ride Comfort	Quiet Ride
Wrangler SR-A	8	8	7	7	8	8
Wrangler Fortitude HT	10	9	7	7	9	9
Wrangler TrailRunner AT	9	9	8	8	8	8
Wrangler All-Terrain Adventure with Kevlar®	10	10	8	8	8	9
Wrangler DuraTrac	8	8	9	9	7	6
Wrangler MT/R with Kevlar®	8	7	7	10	5	5

ALL-TERRAIN

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each product category. However, using the scale to distinguish between tires across different types of product categories would be misleading.



ON-ROAD												ON/OFF-ROAD						OFF-ROAD						TRAILER							
Wrangler® Workhorse® HT (Pg. 80)	Wrangler SR-A® (Pg. 82)	Wrangler Fortitude HT® (Pg. 84)	Wrangler Territory® HT (Pg. 86)	Wrangler® HT (Pg. 87)	Wrangler® HP (Pg. 88)	Wrangler® ST (Pg. 89)	Fortera® HL (Pg. 90)	Fortera SL® (Pg. 91)	Radial LS (Not Shown)	Cargo (Not Shown)	Cargo Vector 2 (Not Shown)	Wrangler® Workhorse® AT (Pg. 92)	Wrangler® All-Terrain Adventure with Kevlar® (Pg. 93)	Wrangler® All-Terrain Adventure with Kevlar® Pro-Grade (Pg. 94)	Wrangler® All-Terrain Adventure (Not Shown)	Wrangler TrailRunner AT® (Pg. 96)	Wrangler Territory® AT (Pg. 98)	Wrangler Enforcer® AT (Pg. 99)	Wrangler® AT/S (Pg. 100)	Wrangler® AT (Pg. 101)	Wrangler DuraTrac® (Pg. 102)	Wrangler® Workhorse® RT (Pg. 104)	Wrangler MT/R® with Kevlar® (Pg. 106)	Military Wrangler MT/R® (Not Shown)	Wrangler Territory® MT (Pg. 108)	Fierce Altitude M/T® (Pg. 109)	Wrangler Enforcer® MT (Pg. 110)	Wrangler® MT (Pg. 110)	Endurance® (Pg. 111)		
ST175/80R13																															
ST185/80R13																															
LT195/75R14																					C										
ST205/75R14																														D	
ST215/75R14																														D	
215/75R15	100S																														
225/70R15	100S																														
225/75R15	102S																														
235/70R15	102S																														
235/75R15	105T	105T																													
265/70R15																															
265/75R15																															
LT215/75R15				D																											
LT235/75R15				*C																											
ST205/75R15																														D	
ST225/75R15																														E	
30X9.50R15LT																															
32X11.50R15LT																															
35X12.50R15LT																															
31X10.50R15LT	C																														
33X12.50R15LT																															
215/65R16											109T																				
215/70R16	*100S																														
215/75R16																															
225/70R16																															
225/75R16		104T				104S						104S		104S																	
235/70R16	106T	104S	106T									106T	106T*		106T																
235/75R16		109S	112T																												
245/70R16	107T		107T									107T	107T*		107T																
245/75R16	111T		111T									111S	111T		111S																
255/65R16																															
255/70R16		108S										111S	111T		111S							111S									
265/70R16		*111S	112T									112T	112T		112T							112S									
265/75R16	116T	*114S	116T									116T	116T		116T																
LT215/85R16	E	*E		E								E	E		E							E									
LT225/75R16	E		E	E								E	E		E							E	E								
ST235/80R16																														E	
LT235/85R16	E			E								E	*E		E							E	E	E			*E				
ST235/85R16																														E	
LT245/75R16	E	*E	E	E								E	E		E							C,*E	E	E							
LT255/85R16																															
ST255/85R16																														E	
LT265/70R16																							E								
LT265/75R16	E		E									E	*E		E							C,*E	E	E			*E				
LT285/75R16												E	*E		E							E	E	E			*E				
LT305/70R16																							E	E							
LT315/75R16																							E	D							

*Discontinued in 2020

ALL-TERRAIN TIRE SELECTOR CHART

	ON-ROAD											ON/OFF-ROAD							OFF-ROAD						TRAILER					
	Wrangler® Workhorse® HT (Pg. 80)	Wrangler SR-A® (Pg. 82)	Wrangler Fortitude HT® (Pg. 84)	Wrangler Territory® HT (Pg. 86)	Wrangler® HT (Pg. 87)	Wrangler® HP (Pg. 88)	Wrangler® ST (Pg. 89)	Fortera® HL (Pg. 90)	Fortera SL® (Pg. 91)	Radial LS (Not Shown)	Cargo (Not Shown)	Cargo Vector 2 (Not Shown)	Wrangler® Workhorse® AT (Pg. 92)	Wrangler® All-Terrain Adventure with Kevlar® (Pg. 93)	Wrangler® All-Terrain Adventure with Kevlar® Pro-Steels (Pg. 94)	Wrangler® All-Terrain Adventure (Not Shown)	Wrangler TrailRunner AT® (Pg. 96)	Wrangler Territory® AT (Pg. 98)	Wrangler Enforcer® AT (Pg. 99)	Wrangler® AT/S (Pg. 100)	Wrangler® AT (Pg. 101)	Wrangler DuraTrac® (Pg. 102)	Wrangler® Workhorse® RT (Pg. 104)	Wrangler MT/R® with Kevlar® (Pg. 106)	Military Wrangler MT/R® (Not Shown)	Wrangler Territory® MT (Pg. 108)	Fierce Altitude M/T® (Pg. 109)	Wrangler Enforcer® MT (Pg. 110)	Wrangler® MT (Pg. 110)	Endurance® (Pg. 111)
LT285/75R18																						F		F						
LT295/65R18																							E							
LT295/70R18																							E		E					
LT325/65R18																	D						E						*E	
33X110.50R18LT																								D						
35X12.50R18LT																							*D,*E,F		E				*E	
37X13.50R18LT																								D						
255/55R19																							111Q							
255/60R19													*109T																	
255/65R19													114H										114Q							
255/55R20																							110Q							
255/60R20													113H										110Q							
265/50R20		106S						107T					107T										113Q							
275/55R20	113T	111S										113T	113T		113T							113T								
275/60R20		114S		115T									115T		115S								115S							
LT265/60R20	E	E										E	E													C				
LT275/55R20																							E							
LT275/60R20																							E							
LT275/65R20	E												E		E							E	E	E				*E		
LT285/55R20													E																	
LT285/60R20	E												E																*E	
LT285/65R20																								E						
LT305/55R20													E										E							
LT325/60R20																							E							
33X12.50R20LT																							E		E					
35X12.50R20LT																							F		E			E		
37X12.50R20LT																							F		E					
37X13.50R22																							F							
285/45R22	114H		114H					114H				114H			114T															
305/40R22								114H																						
305/45R22								118H																						
185/60R15C			94T																											
205/65R15C																														
225/70R15C																														
195/75R16C			107R																											
225/75R16C			121R																											
235/65R16C			121R										E																	

*Discontinued in 2020

WRANGLER® WORKHORSE® HT

Hardworking, All-Season Dependability With On-Road Traction



- 1. Long-Lasting Tread Compound
- 2. Deep, Wide Circumferential Grooves
- 3. Optimized Tread Pattern

FEATURES	BENEFITS
1. Long-lasting tread compound	Ensures even tire wear and dependable performance
2. Deep, wide circumferential grooves	Provides strong grip in dry, wet, and light snow conditions
3. Optimized tread pattern	Reduces overall road noise and helps to deliver a quiet on-road experience

PERFORMANCE RATINGS

Dry Traction	9
Wet Traction	9
Snow Traction	7
Off-Road Traction	7
Ride Comfort	9
Quiet Ride	9

60000*
MILE TREAD LIFE
LIMITED WARRANTY

95,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



* See warranty brochure for complete details.

WRANGLER WORKHORSE HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
235/75R15	105T	SL	BSL	TBD [†]	TBD [†]	6.0 - 7.0	6.5	9.3	28.9	2,039	11	723	680 A B
235/70R16	106T	SL	BSL	TBD [†]	TBD [†]	6.0 - 8.0	7	9.5	29	2,094	12	721	680 A B
245/70R16	107T	SL	OWL	TBD [†]	TBD [†]	6.5 - 8.0	7	9.8	29.5	2,149	12	708	680 A B
245/75R16	111T	SL	OWL	TBD [†]	TBD [†]	6.5 - 8.0	7	9.8	30.5	2,403	12	685	680 A B
265/75R16	116T	SL	OWL	TBD [†]	TBD [†]	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	680 A B
235/65R17	104T	SL	BSL	TBD	TBD [†]	6.5 - 8.5	7	9.5	29	1,984	12	721	680 A B
235/75R17	109T	SL	BSL	TBD [†]	TBD [†]	6.0 - 8.0	6.5	9.3	30.9	2,271	12	676	680 A B
245/65R17	107T	SL	BSL	TBD [†]	TBD [†]	7.0 - 8.5	7	9.8	29.5	2,149	12	708	680 A B
245/70R17	110T	SL	OWL	TBD [†]	TBD [†]	6.5 - 8.0	7	9.8	30.6	2,337	12	683	680 A B
255/70R17	112T	SL	OWL	TBD [†]	TBD [†]	6.5 - 8.5	7.5	10.3	31.1	2,469	12	672	680 A B
265/65R17	112T	SL	OWL	TBD [†]	TBD [†]	7.5 - 9.5	8	10.7	30.6	2,469	12	683	680 A B
265/70R17	115T	SL	VSBL	116007651	241632	7.0 - 9.0	8	10.7	31.7	2,679	12	659	680 A B
265/70R17	115T	SL	OWL	116010652	241642	7.0 - 9.0	8	10.7	31.7	2,679	12	659	680 A B
245/60R18	105T	SL	BSL	TBD [†]	TBD [†]	7.0 - 8.5	7	9.8	29.6	2,039	12	706	680 A B
255/65R18	111T	SL	BSL	TBD [†]	TBD [†]	7.0 - 9.0	7.5	10.2	31.1	2,403	12	672	680 A B
265/70R18	116T	SL	OWL	TBD [†]	TBD [†]	7.0 - 9.0	8	10.7	32.6	2,756	12	641	680 A B
275/65R18	116T	SL	OWL	116009652	241639	7.5 - 9.5	8	11	32.1	2,756	12	651	680 A B
275/55R20	113T	SL	VSBL	116008651	241638	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	680 A B
285/45R22	114H	XL	BSL	TBD [†]	TBD [†]	9.0 - 10.5	9.5	11.2	32.1	2,601	12	651	680 A B
WRANGLER WORKHORSE HT LIGHT TRUCK													
LT215/85R16	115R	E	BSL	131517875	241641	5.5 - 7.0	6	8.6	30.5	2,680	13	688	
LT225/75R16	115R	E	BSL	131748875	241635	6.0 - 7.0	6	8.8	29.3	2,680	15	710	
LT235/85R16	120R	E	BSL	TBD [†]	TBD [†]	6.0 - 7.5	6.5	9.3	31.7	3,042	15	659	
LT245/75R16	120R	E	BSL	131747875	241640	6.5 - 8.0	7	9.8	30.5	3,042	15	682	
LT265/75R16	123R	E	OWL	TBD [†]	TBD [†]	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656	
LT235/80R17	120R	E	BSL	131635875	241637	6.0 - 7.5	6.5	9.3	31.8	3,085	13	654	
LT245/70R17	119R	E	BSL	131469875	241634	6.5 - 8.0	7	9.8	30.6	3,000	15	680	
LT285/70R17	121R	E	BSL	TBD [†]	TBD [†]	7.5 - 9.0	8.5	11.5	32.8	3,195	13	638	
LT245/75R17	121R	E	BSL	131636875	241631	6.5 - 7.5	7	9.8	31.7	3,195	13	663	
LT265/70R17	121R	E	BSL	131535875	241633	7.0 - 8.5	8	10.7	31.7	3,195	15	656	
LT265/70R18	124R	E	BSL	TBD [†]	TBD [†]	7.0 - 8.5	8	10.7	31.7	3,525	13	638	
LT275/65R18	123R	E	BSL	131092875	241636	7.5 - 9.0	8	11	32.1	3,415	13	651	
LT275/70R18	125R	E	BSL	131646875	241570	7.0 - 8.5	8	11	33.4	3,640	13	630	
LT265/60R20	121R	E	BSL	TBD [†]	TBD [†]	7.5 - 9.5	8	10.7	32.5	3,195	13	640	
LT275/65R20	126R	E	BSL	TBD [†]	TBD [†]	7.5 - 9.5	8	11	34.1	3,750	13	610	
LT285/60R20	125R	E	BSL	TBD [†]	TBD [†]	8.0 - 10.0	8.5	11.5	33.5	3,640	13	622	

[†] Launching in 2022

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER SR-A®

A Trusted Tire Offering a Smooth, Quiet Ride



FEATURES	BENEFITS
1. Zigzag microgrooves	Offer enhanced traction in rain, snow and ice
2. Wide circumferential grooves	Help move water away from the tread for enhanced traction in rain
3. Exclusive wet traction compound	Helps provide traction on wet roads

PERFORMANCE RATINGS

Dry Traction	8
Wet Traction	8
Snow Traction	7
Off-Road Traction	7
Ride Comfort	8
Quiet Ride	8

50000 *
MILE TREAD LIFE
LIMITED WARRANTY

80,000 Kilometre
Tread Life
Limited Warranty
P-Metric Sizes Only

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



On-Road



All-Season



Chosen as Original Equipment
by Global Vehicle Manufacturers

* See warranty brochure for complete details.

WRANGLER SR-A SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P215/75R15	100S	SL	OWL	183025418	201206	5.5 - 7.0	6	8.5	27.7	1,742	11	755	500 A B	
P225/70R15	100S	SL	OWL	183482418	201530	6.0 - 7.5	6.5	9	27.4	1,753	11	762	500 A B	
P225/75R15	102S	SL	OWL	183064418	201207	6.0 - 7.5	6	8.8	28.3	1,874	11	738	500 A B	
P235/70R15	102S	SL	OWL	183408418	201205	6.0 - 8.0	7	9.5	28	1,896	11	747	500 A B	
215/70R16	100S	SL	VS	183021436	216831	5.5 - 7.0	6.5	8.7	27.9	1,764	11	749	500 A B	
*† P235/70R16	104S	SL	OWL	183407418	135299	6.0 - 8.0	7	9.5	29	1,984	13	721	500 A B	FORD ESCAPE (04-07), MERCURY MARINER (05-07), JEEP LIBERTY LIMITED SPORT (04), JEEP LIBERTY (05-12)
P235/75R16	109S	XL	OWL	183680418	201722	6.0 - 8.0	6.5	9.3	29.8	2,271	11	700	500 A B	
P255/70R16	109S	SL	OWL	183601418	201210	6.5 - 8.5	7.5	10.2	30.1	2,271	12	695	500 A B	
* P265/70R16	111S	SL	OWL	183212418	201231	7.0 - 9.0	8	10.7	30.6	2,403	12	682	500 A B	
* P265/75R16	114S	SL	OWL	183857418	201233	7.0 - 9.0	7.5	10.5	31.7	2,601	12	660	500 A B	
* P215/65R17	98S	SL	OWL	183678418	201170	6.0 - 7.5	6.5	8.7	28	1,653	10	746	500 A B	JEEP COMPASS (13-14), PATRIOT (07-17), RENEGADE TRAILHAWK (15)
*† P235/65R17	103S	SL	OWL	183105418	150861	6.5 - 8.5	7	9.5	29.1	1,929	13	719	500 A B	JEEP GRAND CHEROKEE OVERLAND (04)
P235/75R17	108S	SL	OWL	183539418	212666	6.0 - 8.0	6.5	9.3	30.9	2,205	11	677	500 A B	
* P245/65R17	105S	SL	OWL	183284418	193001	7.0 - 8.5	7	9.8	29.5	2,039	12	708	500 A B	JEEP GRAND CHEROKEE (05-06)
* P245/70R17	108S	SL	VS	183114470	189903	6.5 - 8.0	7	9.8	30.6	2,205	11	684	500 A B	DODGE DURANGO (04-09), DODGE RAM 1500 (06-09)
† P255/75R17	113S	SL	OWL	183107418	199747	6.5 - 8.5	7	10	32.1	2,535	12	649	500 A B	JEEP WRANGLER (13-18)
* P265/65R17	110S	SL	VS	183602436	188100	7.5 - 9.5	8	10.7	30.6	2,337	11	684	500 A B	DODGE DAKOTA (05-11), DODGE DURANGO (04-05), MITSUBISHI RAIDER (06-09)
P265/70R17	113R	SL	VS	183106436	175021	7.0 - 9.0	8	10.7	31.7	2,535	12	660	500 A B	RAM 1500 (13-21)
P265/70R17	113R	SL	OWL	183106418	175026	7.0 - 9.0	8	10.7	31.7	2,535	12	660	500 A B	RAM 1500 (13-21)
P265/60R18	109T	SL	VS	183558436	201944	7.5 - 9.5	8	10.7	30.5	2,271	11	682	500 A B	CHRYSLER ASPEN (06-09), DODGE DURANGO (06-09), DODGE DAKOTA (07-11)
P265/50R20	106S	SL	VS	183675436	202997	7.5 - 9.5	8.5	10.9	30.5	2,094	11	686	500 A B	CHRYSLER ASPEN (08-09), DODGE DURANGO (08-09)
P275/55R20	111S	SL	BSL	183102217	218964	7.5 - 9.5	8.5	11.2	31.9	2,403	12	655	500 A B	CHEVROLET SILVERADO (14-19), GMC SIERRA (14-19)
P275/60R20	114S	SL	VS	183934436	202747	7.5 - 9.5	8	11	33	2,601	11	634	500 A B	NISSAN TITAN (13-21)
P275/60R20	114S	SL	OWL	183934492	216827	7.5 - 9.5	8	11	33	2,601	11	634	500 A B	RAM 1500 (13-21)
P275/60R20	114S	SL	VS	183934470	221505	7.5 - 9.5	8	11	33	2,601	11	634	500 A B	RAM 1500 (13-21)
WRANGLER SR-A LIGHT TRUCK														
* LT215/85R16	115P	E	BSL	179751217	212692	5.5 - 7.0	6	8.6	30.5	2,680	14	688		
* LT245/75R16	120R	E	BSL	179747217	212693	6.5 - 8.0	7	9.8	30.5	3,042	13	686		
* LT235/80R17	120R	E	VS	179136436	166228	6.0 - 7.5	6.5	9.3	31.8	3,085	14	654		DODGE 3500 DWR (04-05)
* LT245/70R17	119R	E	OWL	179469492	203028	6.5 - 8.0	7	9.8	30.6	3,000	14	684		
* LT245/75R17	121R	E	OWL	179636492	203029	6.5 - 7.5	7	9.8	31.5	3,195	14	663		
LT265/70R17	121S	E	BSL	179696217	202212	7.0 - 8.5	8	10.7	31.7	3,195	15	660		CHEVROLET SILVERADO HD (13-19), GMC SIERRA HD (13-19)
LT265/70R18	124S	E	VS	179040436	223022	7.0 - 9.0	8	10.7	32.6	3,525	13	638		CHEVROLET SILVERADO HD (13-19), GMC SIERRA HD (13-19)
LT275/65R18	123Q	E	OWL	179029492	216833	7.5 - 9.0	8	11	32.1	3,415	14	651		
LT265/60R20	121S	E	VS	179020436	216121	7.5 - 9.5	8	10.7	32.5	3,195	16	640		CHEVROLET SILVERADO HD (13-19), GMC SIERRA HD (13-19)

*Discontinued 2020

†4-Rib Design.


Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

WRANGLER FORTITUDE HT®

Strength to Tackle the Demands of Your Day, Every Day

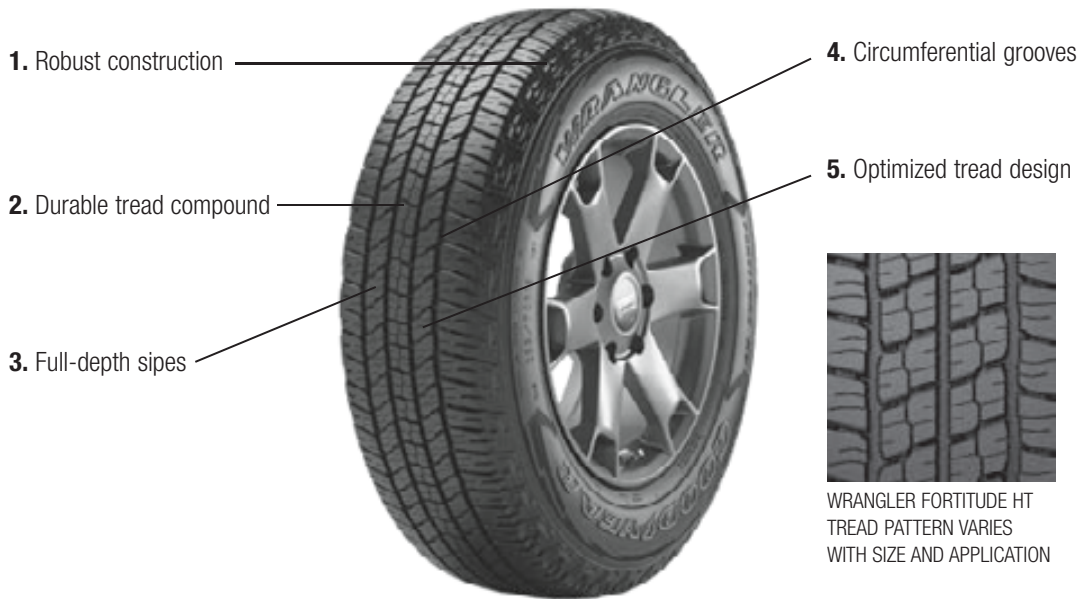


FEATURES	BENEFITS
1. Robust construction	Helps vehicle handle the stress of heavy loads
2. Durable tread compound	Promotes uniform wear for maximizing tread life
3. Full-depth sipes	Enhance snow traction with extra biting edges
4. Circumferential grooves	Help resist hydroplaning for steady handling
5. Optimized tread design	Reduces road noise for a quiet ride

1. Robust construction
2. Durable tread compound
3. Full-depth sipes
4. Circumferential grooves
5. Optimized tread design

- Helps vehicle handle the stress of heavy loads
- Promotes uniform wear for maximizing tread life
- Enhance snow traction with extra biting edges
- Help resist hydroplaning for steady handling
- Reduces road noise for a quiet ride

PERFORMANCE RATINGS

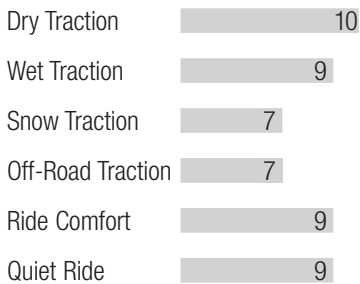

65000*
MILE TREAD LIFE LIMITED WARRANTY

105,000 Kilometre Tread Life Limited Warranty SL and XL Sizes Only

50000*
MILE TREAD LIFE LIMITED WARRANTY

80,000 Kilometre Tread Life Limited Warranty LT Sizes Only



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Chosen as Original Equipment by Global Vehicle Manufacturers

* See warranty brochure for complete details.

WRANGLER FORTITUDE HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
235/75R15	105T	SL	BSL	157142622	233647	6.0 - 7.0	6.5	9.3	28.9	2,039	11	723	680 A B	
225/75R16	104T	SL	OWL	157144620	228826	6.0 - 7.5	6	8.8	29.3	1,984	12	713	680 A B	
235/70R16	106T	SL	BSL	157043622	228827	6.0 - 8.0	7	9.5	29	2,094	12	721	680 A B	
235/75R16	112T	XL	BSL	157145622	228828	6.0 - 8.0	6.5	9.3	29.8	2,469	12	701	680 A B	
245/70R16	107T	SL	OWL	157762620	228829	6.5 - 8.0	7	9.8	29.5	2,149	12	708	680 A B	
245/75R16	111T	SL	OWL	157059620	228830	6.5 - 8.0	7	9.8	30.5	2,403	12	685	680 A B	
265/70R16	112T	SL	BSL	157045622	222656	7.0 - 9.0	8	10.7	30.6	2,469	11	682	680 A B	CHEVROLET COLORADO (15-20), GMC CANYON (15-20)
265/75R16	116T	SL	OWL	157254620	238652	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	680 A B	
225/65R17	102H	SL	VSB	157561834	239534	6.0 - 8.0	6.5	9.0	28.5	1,874	10	733	680 A B	
235/65R17	104T	SL	BSL	157996622	228833	6.5 - 8.5	7	9.5	29	1,984	12	721	680 A B	
235/70R17	109T	XL	BSL	157078622	228834	6.0 - 8.0	7	9.5	30	2,271	12	697	680 A B	
235/75R17	109T	SL	BSL	157089622	228835	6.0 - 8.0	6.5	9.3	30.9	2,271	12	676	680 A B	
245/65R17	107T	SL	BSL	157592622	228836	7.0 - 8.5	7	9.8	29.5	2,149	12	708	680 A B	
245/70R17	110T	SL	OWL	157172620	228837	6.5 - 8.0	7	9.8	30.6	2,337	12	683	680 A B	
255/65R17	110T	SL	BSL	157069622	222654	7.0 - 9.0	7.5	10.2	30.1	2,335	11	691	680 A B	CHEVROLET COLORADO (15-21), GMC CANYON (15-21)
255/70R17	112T	SL	OWL	157067620	228838	6.5 - 8.5	7.5	10.3	31.1	2,469	12	672	680 A B	
265/65R17	112T	SL	OWL	157061620	228839	7.5 - 9.5	8	10.7	30.6	2,469	12	683	680 A B	
265/70R17	115T	SL	BSL	157042622	231043	7.0 - 9.0	8	10.7	31.7	2,679	12	659	680 A B	
265/70R17	115T	SL	OWL	157042620	222031	7.0 - 9.0	8	10.7	31.7	2,679	12	659	680 A B	FORD F-150 (15-20)
245/60R18	105T	SL	BSL	157001622	228840	7.0 - 8.5	7	9.8	29.6	2,039	12	706	680 A B	
255/65R18	111T	SL	BSL	157088622	228841	7.0 - 9.0	7.5	10.2	31.1	2,403	12	672	680 A B	
255/70R18	113T	SL	OWL	157174620	228842	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	680 A B	
265/60R18	110T	SL	BSL	157076622	222652	7.5 - 9.5	8	10.7	30.5	2,337	11	685	680 A B	CHEVROLET COLORADO (15-21), GMC CANYON (15-21)
* 265/65R18	112T	SL	BSL	157051622	230901	7.5 - 9.5	8	10.7	31.5	2,469	11	663	680 A B	
* 265/65R18	112T	SL	OWL	157051620	230903	7.5 - 9.5	8	10.7	31.5	2,469	11	663	680 A B	
265/65R18	114T	SL	BSL	157068622	231499	7.5 - 9.5	8	10.7	31.5	2,601	11	663	680 A B	CHEVROLET SILVERADO (17-21), CHEVROLET TAHOE (17-20), CHEVROLET SUBURBAN (17-20), GMC SIERRA (17-21), GMC YUKON / YUKON XL (17-20)
265/65R18	114T	SL	OWL	157179620	231531	7.5 - 9.5	8	10.7	31.5	2,601	11	663	680 A B	CHEVROLET SILVERADO (17-21), GMC SIERRA (17-21)
265/70R18	116T	SL	OWL	157070620	228844	7.0 - 9.0	8	10.7	32.6	2,756	12	641	680 A B	
275/65R18	116T	SL	VSB	157066708	228707	7.5 - 9.5	8	11	32.1	2,756	11	651	680 A B	RAM 1500 (18-21)
275/65R18	116T	SL	OWL	157081620	232368	7.5 - 9.5	8	11	32.1	2,756	12	651	680 A B	FORD F-150 (18-20)
285/45R22	114H	XL	BSL	157176622	228847	9.0 - 10.5	9.5	11.2	32.1	2,601	12	651	680 A B	
WRANGLER FORTITUDE HT LIGHT TRUCK														
LT215/85R16	115R	E	BSL	179233622	236505	5.5 - 7.0	6	8.6	30.5	2,680	13	688		
LT225/75R16	115R	E	BSL	179748622	228723	6.0 - 7.0	6	8.8	29.3	2,680	15	710		
LT245/75R16	120R	E	BSL	179747622	228725	6.5 - 8.0	7	9.8	30.5	3,042	15	682		
LT265/75R16	123R	E	OWL	179746620	228726	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656		
LT235/80R17	120R	E	BSL	179235622	236506	6.0 - 7.5	6.5	9.3	31.8	3,085	13	654		
LT245/75R17	121R	E	BSL	179236622	236507	6.5 - 7.5	7	9.8	31.7	3,195	13	663		
LT245/70R17	119R	E	BSL	179469622	228728	6.5 - 8.0	7	9.8	30.6	3,000	15	680		
LT265/70R17	121R	E	OWL	179535620	228730	7.0 - 8.5	8	10.7	31.7	3,195	15	656		
LT285/70R17	121R	E	BSL	179237622	236508	7.5 - 9.0	8.5	11.5	32.8	3,195	13	638		
LT265/70R18	124R	E	BSL	179214622	236509	7.0 - 8.5	8	10.7	31.7	3,525	13	638		
LT275/70R18	125R	E	BSL	179139622	236510	7.0 - 8.5	8	11	33.4	3,640	13	630		
LT275/65R18	123R	E	BSL	179092622	236521	7.5 - 9.0	8	11	32.1	3,415	13	651		
LT275/65R20	126R	E	BSL	179231622	236522	7.5 - 9.5	8	11	34.1	3,750	13	610		
LT265/60R20	121R	E	BSL	179097622	236523	7.5 - 9.5	8	10.7	32.5	3,195	13	640		
LT285/60R20	125R	E	BSL	179015622	236524	8.0 - 10.0	8.5	11.5	33.5	3,640	13	622		
WRANGLER FORTITUDE HT C-TYPE EUROPEAN COMMERCIAL METRIC														
185/60R15C	94T	C	BSL	179283622	241645	5.5 - 6.0	5.5	7.4	23.7	1,475	11	876		
195/75R16C	107R	D	BSL	179196622	234166	5.0 - 6.0	5.5	7.7	27.5	2,150	11	756		
225/75R16C	121R	E	BSL	179194622	234164	6.0 - 7.0	6	8.8	29.3	3,195	11	710		
235/65R16C	121R	E	BSL	179195622	234165	6.5 - 7.5	7	9.5	28	3,195	11	743		

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



WRANGLER TERRITORY® HT

An All-Season Tire Engineered for Original Equipment Fitments

FEATURES

- Reinforced tire construction
- Tuned Tread Pitch Sequence
- Ribbed tread pattern

BENEFITS

- Strength and durability to tackle the demands of your day, every day
- Reduced tread pattern noise
- Helps to deliver a smooth quiet ride



All-Season



On-Road



Chosen as Original Equipment by Global Vehicle Manufacturers

WRANGLER TERRITORY HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
275/60R20	115T	SL	VSB	827010815	235379	7.5 - 9.5	8	11	33.0	2,679	11	633	680 A B	FORD F-150 (21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



WRANGLER® HT

An All-Season Tire for Heavy-Duty Trucks and Full-Size Vans

FEATURES

Patented, all-season tread design

Circumferential channels

Solid center rib

BENEFITS

Offers year-round traction

Offer dependable wet traction

Offers a smooth ride and long, even wear



All-Season



On-Road



Chosen as Original Equipment
by Global Vehicle Manufacturers

WRANGLER HT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	ORIGINAL EQUIPMENT FITMENT
LT215/75R15	106Q	D	BSL	744154900	182302	5.5 - 7.0	6	8.5	27.7	2,095	14	755	
* LT235/75R15	104Q	C	BSL	744826802	82003	6.0 - 7.0	6.5	9.3	28.9	1,985	14	724	
LT215/85R16		E	BSL	744821900	122771	5.5 - 7.0	6	8.6	30.5	2,680	13	688	
LT225/75R16	115Q	E	BSL	744830900	139346	6.0 - 7.0	6	8.8	29.3	2,680	14	714	FORD ECONOLINE E-350 (05-08)
LT235/85R16		E	BSL	744725502	88221	6.0 - 7.5	6.5	9.3	31.7	3,042	14	659	
LT245/75R16	120R	E	BSL	744395900	163717	6.5 - 8.0	7	9.8	30.5	3,042	13	686	FORD ECONOLINE E-250 (05-08)

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



WRANGLER® HP

An All-Season Tire Found on Select Truck and SUV Original Equipment Fitments

FEATURES	BENEFITS
----------	----------

Wide circumferential channels	Help efficiently evacuate water from beneath the tread for enhanced wet traction
High sipe density	Offers enhanced all-season traction and a comfortable ride
Large, stiff shoulder blocks	Help provide responsive handling and agility
Lower profile sidewalls	Enhance responsiveness and handling



All-Season



On-Road



Chosen as Original Equipment by Global Vehicle Manufacturers

WRANGLER HP SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* P265/70R17	113S	SL	BSL	403422658	163878	7.0 - 9.0	8	10.7	31.7	2,535	12	660	340 A B	CADILLAC ESCALADE (04-06), CHEVROLET AVALANCHE (04-13), SILVERADO (14-18), SUBURBAN (13-17), TAHOE (06-17), GMC SIERRA (04-18), DENALI (05-10), YUKON (06-17), YUKON XL (11-17)
P265/70R17	113S	SL	VSB	403422171	175652	7.0 - 9.0	8	10.7	31.7	2,535	12	660	340 A B	RAM 1500 (13-21)

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER® ST

An All-Season Tire Found on Select Truck and SUV Original Equipment Fitments



FEATURES	BENEFITS
----------	----------

All-season tread design	Offers all-season traction
Wide circumferential channels	Help to efficiently evacuate water from beneath the tread for enhanced wet traction



All-Season



On-Road



Chosen as Original Equipment by Global Vehicle Manufacturers

WRANGLER ST SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P225/75R16	104S	SL	VSB	773017415	117069	6.0 - 7.5	6	8.8	29.3	1,984	10	714	340 B B	JEEP WRANGLER (13-16)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

ALL-TERRAIN

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



FORTERA® HL

An All-Season Tire Designed with Luxury in Mind for Select Truck and SUV Original Equipment Fitments



FEATURES

- Deep blades and grooves
- Staggered circumferential grooves, curvilinear blades and see-through grooves
- Highly buttressed tread block elements
- Intricate blading in the riding ribs and centerline
- Optimized tread pattern

BENEFITS

- Help extend tread life without sacrificing performance
- Enhance forward and lateral traction, and performance in the rain and snow
- Help provide stable handling and even treadwear
- Enhances handling, noise reduction and all-season traction
- Helps provide a quiet ride

60000*
MILE TREAD LIFE
LIMITED WARRANTY

95,000 Kilometre
Tread Life
Limited Warranty



All-Season



On-Road



Comfortable,
Refined Handling



Chosen as Original Equipment
by Global Vehicle Manufacturers

FORTERA HL SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
P245/65R17	105T	SL	VSB	151284203	197884	7.0 - 8.5	7	9.8	29.5	2,039	10	708	540 A B	JEEP GRAND CHEROKEE (13-21)
P245/70R17	108T	SL	VSB	151056203	215305	6.5 - 8.0	7	9.8	30.6	2,205	11	684	540 A B	JEEP GRAND CHEROKEE (11-20)
P255/65R18	109S	SL	BSL	151559248	196833	7.0 - 9.0	7.5	10.2	31.1	2,271	11	672	540 A B	BUICK ENCLAVE (13-17), CHEVROLET TRAVERSE (13-17), GMC ACADIA (13-17)
265/50R20	107T	SL	VSB	151093203	215818	7.5 - 9.5	8.5	10.9	30.5	2,149	10	677	540 A B	DODGE DURANGO (13-15), JEEP GRAND CHEROKEE (13-17)

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

* See warranty brochure for complete details.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

FORTERA SL®

An All-Season Tire Designed with Luxury in Mind for Select Truck and SUV Original Equipment Fitments



FEATURES	BENEFITS
Directional wraparound tread pattern	Offers a sporty appearance
Rim protector	Helps protect wheels against accidental curb damage
Reinforced shoulder blocks	Help provide even treadwear
Innovative sidewall design	Enhances the look and style of your vehicle
Deep non-skid tread elements with high sipe density	Help provide enhanced all-season traction



Chosen as Original Equipment
by Global Vehicle Manufacturers

FORTERA SL SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
285/45R22	114H	XL	VSB	151621163	199570	9.0 - 10.5	9.5	11.2	32.1	2,601	10	647	500 B A	RAM 1500 (13-18)
305/40R22	114H	RE	VSB	151774163	194221	10.0 - 12.0	11	12.3	31.6	2,337	12	657	500 A A	
305/45R22	118H	RE	VSB	151775163	194223	9.5 - 11.5	10	11.9	32.8	2,910	12	633	500 A A	

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER® WORKHORSE® AT

Hardworking, All-Season Dependability With On/Off-Road Traction



FEATURES	BENEFITS
1. Large tread blocks	When combined with open grooves and sawtooth edges helps to improve off-road capability
2. Unique designed tread pattern	Helps the tire to wear evenly and perform quietly on various road surfaces
3. Numerous biting edges	Along with a specialized tread compound provides enhanced winter traction

PERFORMANCE RATINGS

Dry Traction	9
Wet Traction	9
Snow Traction	9
Off-Road Traction	8
Ride Comfort	8
Quiet Ride	8

50000 *
MILE TREAD LIFE
LIMITED WARRANTY

80,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow

**

* See warranty brochure for complete details.

** Marked with the Severe Snow Conditions Symbol.

WRANGLER WORKHORSE AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
225/75R16	104 S	SL	OWL	480129856	240873	6.0 - 7.5	6	8.8	29.3	1,984	12	713	580 B B
235/70R16	106 T	SL	OWL	480043856	240558	6.0 - 8.0	7	9.4	29	2,094	12	721	580 B B
245/70R16	107 T	SL	OWL	480762856	240845	6.5 - 8.0	7	9.8	29.5	2,149	12	708	580 B B
245/75R16	111 S	SL	OWL	480128856	240557	6.5 - 8.0	7	9.8	30.5	2,403	12	685	580 B B
255/70R16	111 S	SL	OWL	480127856	240848	6.5 - 8.5	7.5	10.2	30.1	2,403	12	694	580 B B
265/70R16	112 T	SL	OWL	480045856	240853	7.0 - 9.0	8	10.7	30.6	2,469	12	683	580 B B
265/75R16	116 T	SL	OWL	480057856	240855	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	580 B B
225/65R17	102 T	SL	OWL	480757856	240560	6.0 - 8.0	6.5	9	28.5	1,874	12	733	580 B B
235/65R17	104 T	SL	BSL	480996855	240841	6.5 - 8.5	7	9.45	29.1	1,984	12	719	580 B B
235/70R17	109 T	XL	BSL	480078855	240843	6.0 - 8.0	7	9.4	30	2,271	12	697	580 B B
245/65R17	107 T	SL	BSL	480592855	240844	7.0 - 8.5	7	9.8	29.5	2,149	12	708	580 B B
245/70R17	110 T	SL	BSL	480060855	240847	6.5 - 8.0	7	9.8	30.6	2,337	12	683	580 B B
255/70R17	112 T	SL	OWL	480067856	240849	6.5 - 8.5	7.5	10.2	31.1	2,469	12	672	580 B B
265/65R17	112 T	SL	OWL	480061856	240851	7.5 - 9.5	8	10.7	30.6	2,469	12	683	580 B B
265/70R17	115 T	SL	OWL	480042856	240556	7.0 - 9.0	8	10.7	31.7	2,679	12	659	580 B B
235/60R18	103 T	SL	BSL	480250855	240842	6.5 - 8.5	7	9.45	29.1	1,929	12	718	580 B B
245/60R18	105 T	SL	BSL	480001855	240846	7.0 - 8.5	7	9.7	29.6	2,039	12	707	580 B B
255/70R18	113 T	SL	OWL	480074856	240850	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	580 B B
265/60R18	110 T	SL	OWL	480076856	242489	7.5 - 9.5	8	10.7	30.5	2,337	12	685	580 B B
265/65R18	114 T	SL	OWL	480068856	240852	7.5 - 9.5	8	10.7	31.5	2,601	12	663	580 B B
265/70R18	116 T	SL	OWL	480070856	240854	7.0 - 9.0	8	10.7	32.6	2,756	12	641	580 B B
275/55R20	113 T	SL	BSL	480065855	240856	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	580 B B
285/45R22	114 H	XL	BSL	480176855	240857	9.5 - 10.5	9.5	11.2	32.1	2,601	12	651	580 B B
WRANGLER WORKHORSE AT LIGHT TRUCK													
LT215/85R16	115 R	E	BSL	481233855	240858	5.5 - 7.0	6	8.6	30.5	2,680	15	682	
LT225/75R16	115 R	E	BSL	481748855	240859	6.0 - 7.0	6	8.8	29.3	2,680	15	710	
LT235/85R16	120 R	E	BSL	481745855	240861	6.0 - 7.5	6.5	9.3	31.7	3,042	15	656	
LT245/75R16	120 S	E	BSL	481103855	240863	6.5 - 8.0	7	9.8	30.5	3,042	15	682	
LT265/75R16	123 R	E	OWL	481746856	242426	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656	
LT285/75R16	126 R	E	OWL	481585856	240872	7.5 - 9.0	8	11.3	33.1	3,750	15	628	
LT225/65R17	107 S	D	BSL	481267855	240875	6.0 - 8.0	6.5	8.9	28.5	2,150	15	733	
LT235/80R17	120 R	E	BSL	481235855	240860	6.0 - 7.5	6.5	9.3	31.8	3,085	15	654	
LT245/70R17	119 S	E	BSL	481120855	240862	6.5 - 8.0	7	9.8	30.6	3,000	15	680	
LT245/75R17	121 S	E	BSL	481104855	240864	6.5 - 7.5	7	9.8	31.5	3,195	15	660	
LT265/70R17	121 S	E	BSL	481535855	240865	7.0 - 8.5	8	10.7	31.7	3,195	15	656	
LT285/70R17	121 R	E	OWL	481096856	240871	7.5 - 9.0	8.5	11.5	33	3,195	15	630	
LT265/70R18	124 S	E	OWL	481014856	240866	7.0 - 9.0	8	10.7	32.6	3,525	15	638	
LT275/65R18	123 S	E	OWL	481965856	240870	7.5 - 9.0	8	11	32.1	3,415	15	648	
LT275/70R18	125 R	E	OWL	481139856	240867	7.0 - 8.5	8	11	33.2	3,640	15	627	
LT265/60R20	121 R	E	BSL	481097855	240868	7.5 - 9.5	8	10.7	32.52	3,195	15	643	
WRANGLER WORKHORSE AT C-TYPE EUROPEAN COMMERCIAL METRIC													
235/65R16C	118 R	E	BSL	481266855	240559	6.5 - 7.5	7	9.5	28	2,910	11	743	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER® ALL-TERRAIN ADVENTURE WITH KEVLAR®

A Versatile Tire with Rugged Strength for Quiet On-Road Driving and Going Off-Road at a Moment's Notice – Featuring DuPont™ Kevlar® Fiber and Durawall® Technology



1. A layer of DuPont Kevlar®


2. Durawall Technology

3. Traction ridges and open shoulder blocks

4. Biting edges and a rubber compound



Pro-Grade package on LT sizes featuring two layers of Kevlar®, belts with 30% more steel† and marked with the Severe Snow Conditions Symbol**



WRANGLER ALL-TERRAIN ADVENTURE WITH KEVLAR® TREAD PATTERN VARIES WITH SIZE AND APPLICATION


FEATURES

1. A layer of DuPont Kevlar®
2. Durawall Technology
3. Traction ridges and open shoulder blocks
4. Biting edges and a rubber compound

BENEFITS

- Offers rugged strength for confident off-road driving
- Helps resist sidewall cuts and punctures
- Help clear mud and snow for versatile off-road traction
- Offer superior traction on wet and icy roads

PERFORMANCE RATINGS

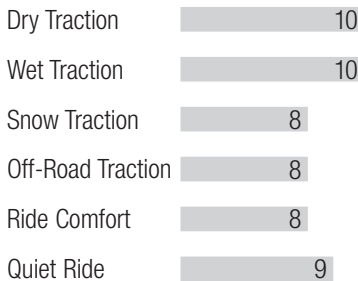

60000*
MILE TREAD LIFE LIMITED WARRANTY

95,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow



Rugged Toughness from DuPont™ Kevlar®



Chosen as Original Equipment by Global Vehicle Manufacturers

† Compared to standard load tires.

* See warranty brochure for complete details.

** Select LT sizes marked with the Severe Snow Conditions Symbol.

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

WRANGLER ALL-TERRAIN ADVENTURE WITH KEVLAR® SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* 235/70R16	106T	SL	BSL	758079572	220309	6.0 - 8.0	7	9.5	29	2,095	12	721	640 A B	
245/70R16	107T	SL	OWL	758762571	219140	6.5 - 8.0	7	9.8	29.5	2,150	12	708	640 A B	
* 245/75R16	111T	SL	OWL	758059571	219136	6.5 - 8.0	7	9.8	30.5	2,405	12	686	640 A B	
255/70R16	111T	SL	OWL	758062571	219138	6.5 - 8.5	7.5	10.2	30.1	2,403	12	695	640 A B	
265/70R16	112T	SL	OWL	758045571	219134	7.0 - 9.0	8	10.7	30.6	2,469	12	682	640 A B	
265/70R16	112T	SL	BSL	758045630	225035	7.0 - 9.0	8	10.7	30.6	2,469	11	682	640 A B	TOYOTA TACOMA (16-21)
265/75R16	116T	SL	OWL	758057571	219135	7.0 - 9.0	7.5	10.5	31.7	2,755	12	660	640 A B	
235/70R17	109T	XL	OWL	758078571	219152	6.0 - 8.0	7	9.5	30	2,405	12	697	640 A B	
235/75R17	109T	SL	BSL	758089572	220536	6.0 - 8.0	6.5	9.3	30.9	2,270	12	677	640 A B	
245/65R17	107T	SL	BSL	758592572	219133	7.0 - 8.5	7	9.8	29.5	2,150	12	708	640 A B	
245/70R17	110T	SL	BSL	758060572	219137	6.5 - 8.0	7	9.8	30.6	2,337	12	684	640 A B	
245/75R17	112T	SL	BSW	758177707	228709	6.5 - 8.0	7	9.8	31.5	2,469	11	663	640 A B	JEEP WRANGLER (18-21)
255/65R17	110T	SL	BSL	758069572	222658	7.0 - 9.0	7.5	10.2	30.1	2,335	11	691	680 A B	CHEVROLET COLORADO (15-21), GMC CANYON (15-21)
255/70R17	112T	SL	OWL	758067571	219144	6.5 - 8.5	7.5	10.3	31.1	2,470	12	672	640 A B	
265/65R17	112T	SL	OWL	758061571	219139	7.5 - 9.5	8	10.7	30.6	2,469	12	684	640 A B	
265/70R17	115T	SL	OWL	758042571	219131	7.0 - 9.0	8	10.7	31.7	2,679	12	660	640 A B	
265/70R17	115T	SL	BSL	758042572	220308	7.0 - 9.0	8	10.7	31.7	2,679	12	660	640 A B	
* 255/65R18	111T	SL	BSL	758088572	220341	7.0 - 9.0	7.5	10.2	31.1	2,405	12	672	640 A B	
255/70R18	113T	SL	BSW	758074707	228718	6.5 - 8.5	7.5	10.2	32.1	2,535	11	651	640 A B	JEEP WRANGLER (18-21)
265/60R18	110T	SL	OWL	758076571	219150	7.5 - 9.5	8	10.7	30.5	2,337	12	685	640 A B	
265/60R18	110T	SL	BSL	758076630	226999	7.5 - 9.5	8	10.7	30.5	2,337	12	685	640 A B	JEEP GRAND CHEROKEE (16-21)
265/65R18	114T	SL	OWL	758068571	219145	7.5 - 9.5	8	10.7	31.5	2,601	12	663	640 A B	
265/70R18	116T	SL	OWL	758070571	219147	7.0 - 9.0	8	10.7	32.6	2,755	12	640	640 A B	
275/65R18	116T	SL	OWL	758066571	219143	7.5 - 9.5	8	11	32.1	2,756	12	651	640 A B	
275/65R18	116T	SL	BSL	758081572	220322	7.5 - 9.5	8	11	32.1	2,756	12	651	640 A B	
* 255/60R19	109T	SL	BSL	758083572	220340	7.0 - 9.0	7.5	10.2	31.1	2,270	12	672	640 A B	
265/50R20	107T	SL	BSL	758124630	227271	7.5 - 9.5	8.5	10.9	30.5	2,149	12	686	640 A B	JEEP GRAND CHEROKEE (16-21)
275/55R20	113T	SL	BSL	758065572	219141	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	640 A B	
275/55R20	113T	SL	OWL	758065571	222025	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	640 A B	FORD F-150 (15-20)
275/60R20	115T	SL	OWL	758073571	219148	7.5 - 9.5	8	11	33	2,679	12	634	640 A B	
275/60R20	115T	SL	BSL	758082572	220323	7.5 - 9.5	8	11	33	2,679	12	634	640 A B	
WRANGLER ALL-TERRAIN ADVENTURE WITH KEVLAR® PRO-GRADE														
LT215/85R16	115R	E	BSL	748517572	219162	5.5 - 7.0	6	8.6	30.5	2,680	15	688		
LT225/75R16	115R	E	BSL	748748572	219159	6.0 - 7.0	6	8.8	29.3	2,680	15	714		
* LT235/85R16	120R	E	BSL	748745572	219158	6.0 - 7.5	6.5	9.3	31.7	3,042	15	659		
LT245/75R16	120S	E	BSL	748103572	225437	6.5 - 8.0	7	9.8	30.7	3,042	15	686		
LT265/75R16	123R	E	BSL	748746572	219157	7.0 - 8.0	7.5	10.5	31.7	3,415	15	660		
* LT265/75R16	123R	E	OWL	748746571	220325	7.0 - 8.0	7.5	10.5	31.7	3,415	15	660		
* LT285/75R16	126R	E	OWL	748138571	231397	7.5 - 9.0	8	11.3	33.1	3,750	15	628		
* LT285/75R16	126R	E	BSL	748138572	231398	7.5 - 9.0	8	11.3	33.1	3,750	15	628		
LT235/80R17	120R	E	BSL	748635572	219165	6.0 - 7.5	6.5	9.3	31.8	3,085	15	654		
LT245/70R17	119R	E	OWL	748469571	219169	6.5 - 8.0	7	9.8	30.6	3,000	15	684		
LT245/70R17	119R	E	BSL	748469572	220329	6.5 - 8.0	7	9.8	30.6	3,000	15	684		
LT245/70R17	119S	E	BSL	748120572	227189	6.5 - 8.0	7	9.8	30.6	3,000	14	684		FORD F-150 (16-20)
LT245/75R17	121S	E	OWL	748104571	225439	6.5 - 7.5	7	9.8	31.7	3,195	15	663		
LT245/75R17	121S	E	BSL	748104572	225440	6.5 - 7.5	7	9.8	31.7	3,195	15	663		
LT265/70R17	121S	E	OWL	748661571	225841	7.0 - 8.5	8	10.7	31.7	3,195	15	660		
LT265/70R17	121S	E	BSL	748661572	225843	7.0 - 8.5	8	10.7	31.7	3,195	15	660		
* LT285/70R17	121R	E	OWL	748096571	219170	7.5 - 9.0	8.5	11.5	32.8	3,195	15	638		
LT285/70R17	121R	E	BSL	748096572	220330	7.5 - 9.0	8.5	11.5	32.8	3,195	15	638		
LT265/70R18	124S	E	BSL	748014572	225842	7.0 - 8.5	8	10.7	31.7	3,525	15	638		
LT275/65R18	123S	E	OWL	748965571	225844	7.5 - 9.0	8	11	32.1	3,415	15	651		
SLT275/65R18	113S	C	OWL	748958571	222029	7.5 - 9.0	8	11	32.1	2,535	15	651		FORD F-150 (14-20)
* LT275/70R18	125S	E	BSL	748108572	225461	7.0 - 8.5	8	11	33.4	3,640	15	630		
LT275/70R18	125R	E	BSL	748139686	225567	7.0 - 8.5	8	11	33.4	3,640	14	630		FORD SUPERDUTY (F-250/350) (17-21)
LT275/70R18	125R	E	OWL	748139571	227769	7.0 - 8.5	8	11	33.4	3,640	14	630		FORD SUPERDUTY (F-250/350) (17-21)
* LT285/65R18	125R	E	BSL	748093572	220338	8.0 - 10.0	8.5	11.5	32.6	3,640	15	639		
LT265/60R20	121R	E	BSL	748097572	220332	7.5 - 9.5	8	10.7	32.5	3,197	15	640		
LT275/65R20	126S	E	OWL	748303571	226061	7.5 - 9.5	8	11	34.1	3,750	15	610		
LT275/65R20	126S	E	BSL	748303572	226062	7.5 - 9.5	8	11	34.1	3,750	15	610		
LT285/55R20	122R	E	BSL	748101572	220336	8.0 - 10.0	9	11.7	32.4	3,305	15	646		
LT285/60R20	125R	E	BSL	748015572	220337	8.0 - 10.0	8.5	11.5	33.5	3,638	15	622		

‡Not an LT size marked with the Severe Snow Conditions Symbol.
 §Only one layer of Kevlar®.
 ^4-rib version; not marked with the Severe Snow Conditions Symbol.

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

ALL-TERRAIN



WRANGLER TRAILRUNNER AT®

A Tough, Dependable Tire with a Hardworking Combination of On- and Off-Road Performance



FEATURES BENEFITS

1. Large interlocking tread blocks
2. Sawtooth block edges
3. Multi-angle sipes
4. Optimized tread pattern
5. Rugged stepped shoulder

- Help to deliver strong on- and off-road durability
- Offer all-season traction on and off the road
- Offer all-season traction on and off the road
- Enhances tread life and helps to quiet noise from on-road driving
- Helps to provide added traction in deep mud and snow

PERFORMANCE RATINGS

Dry Traction	9
Wet Traction	9
Snow Traction	8
Off-Road Traction	8
Ride Comfort	8
Quiet Ride	8

55000*
MILE TREAD LIFE LIMITED WARRANTY

85,000 Kilometre Tread Life Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow

**



Chosen as Original Equipment by Global Vehicle Manufacturers

* See warranty brochure for complete details.

** 5-Rib LT sizes (section width 245 and greater) marked with the Severe Snow Conditions Symbol.

WRANGLER TRAILRUNNER AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
225/75R15	102T	SL	OWL	741131680	229120	6.0 - 7.5	6	8.8	28.3	1,874	12	739	580 A B	
* 235/75R15	105S	SL	OWL	741126680	229103	6.0 - 8.0	6.5	9.3	28.9	2,039	12	723	580 A B	
235/75R15	105S	SL	BSL	741126681	240555	6.0 - 8.0	6.5	9.25	28.9	2,039	12	724	580 A B	
225/75R16	104S	SL	OWL	741129680	229109	6.0 - 7.5	6	8.8	29.3	1,984	12	713	580 A B	
235/70R16	106T	SL	OWL	741043680	229108	6.0 - 8.0	7	9.4	29	2,094	12	721	580 A B	MAHINDRA ROXOR (18-21)
245/70R16	107T	SL	OWL	741762680	229107	6.5 - 8.0	7	9.8	29.5	2,149	12	708	580 A B	
245/75R16	111S	SL	OWL	741128680	229106	6.5 - 8.0	7	9.8	30.5	2,403	12	685	580 A B	
255/70R16	111S	SL	OWL	741127680	229104	6.5 - 8.5	7.5	10.2	30.1	2,403	12	694	580 A B	
265/70R16	112T	SL	OWL	741045680	229102	7.0 - 9.0	8	10.7	30.6	2,469	12	683	580 A B	
265/75R16	116T	SL	OWL	741057680	229105	7.0 - 9.0	7.5	10.5	31.7	2,756	12	659	580 A B	
225/65R17	102T	SL	OWL	741757680	237419	6.0 - 8.0	6.5	9	28.5	1,874	12	733	580 A B	
235/65R17	104T	SL	BLK	741996681	237473	6.5 - 8.5	7	9.45	29.1	1,984	12	719	580 A B	
235/70R17	109T	XL	BLK	741134681	229124	6.0 - 8.0	7	9.4	30	2,271	12	697	580 A B	
245/65R17	107T	SL	BLK	741592681	229110	7.0 - 8.5	7	9.8	29.5	2,149	12	708	580 A B	
245/70R17	110T	SL	BLK	741060681	229112	6.5 - 8.0	7	9.8	30.6	2,337	12	683	580 A B	
255/70R17	112T	SL	OWL	741067680	229121	6.5 - 8.5	7.5	10.2	31.1	2,469	12	672	580 A B	
265/65R17	112T	SL	OWL	741061680	229113	7.5 - 9.5	8	10.7	30.6	2,469	12	683	580 A B	
265/70R17	115T	SL	OWL	741042680	228954	7.0 - 9.0	8	10.7	31.7	2,679	12	659	580 A B	
235/60R18	103T	SL	BLK	741250681	237420	6.5 - 8.5	7	9.45	29.1	1,929	12	718	580 A B	
245/60R18	105T	SL	BLK	741001681	237472	7.0 - 8.5	7	9.7	29.6	2,039	12	707	580 A B	
255/70R18	113T	SL	OWL	741074680	229118	6.5 - 8.5	7.5	10.2	32.1	2,535	12	651	580 A B	
265/60R18	110T	SL	OWL	741130680	229116	7.5 - 9.5	8	10.7	30.5	2,337	12	685	580 A B	
265/65R18	114T	SL	OWL	741068680	229117	7.5 - 9.5	8	10.7	31.5	2,601	12	663	580 A B	
265/70R18	116T	SL	OWL	741070680	229119	7.0 - 9.0	8	10.7	32.6	2,756	12	641	580 A B	
275/65R18	116T	SL	OWL	741066680	229115	7.5 - 9.5	8	11	32.1	2,756	12	651	580 A B	
275/55R20	113T	SL	BLK	741065681	229111	7.5 - 9.5	8.5	11.2	31.9	2,535	12	655	580 A B	
275/60R20	115S	SL	BLK	741178681	231393	7.5 - 9.5	8	11	33	2,679	12	633	580 A B	CHEVROLET SILVERADO (19-21), CHEVROLET TAHOE Z71 (21), GMC SIERRA (19-21), GMC YUKON AT4 (21)
285/45R22	114T	SL	BLK	741176681	237471	9.5 - 10.5	9.5	11.2	32.1	2,601	12	651	580 A B	
WRANGLER TRAILRUNNER AT LIGHT TRUCK														
31X10.50R15LT	109R	C	OWL	742510680	229100	7.0 - 9.0	8.5	10.6	30.8	2,270	15	675		
LT215/85R16	115R	E	BLK	742517681	229093	5.5 - 7.0	6	8.6	30.5	2,680	15	682		
LT225/75R16	115R	E	BLK	742748681	228960	6.0 - 7.0	6	8.8	29.3	2,680	15	710		
LT235/85R16	120R	E	BLK	742745681	228957	6.0 - 7.5	6.5	9.3	31.7	3,042	15	656		
LT245/75R16	120S	E	BLK	742103681	228955	6.5 - 8.0	7	9.8	30.5	3,042	15	682		
LT265/75R16	123R	E	OWL	742746680	228958	7.0 - 8.0	7.5	10.5	31.7	3,415	15	656		
LT285/75R16	126R	E	BLK	742138680	232619	7.5 - 9.0	8	11.3	33.1	3,750	15	628		
LT235/80R17	120R	E	BLK	742635681	229094	6.0 - 7.5	6.5	9.3	31.8	3,085	15	654		
LT245/70R17	119S	E	BLK	742120681	229091	6.5 - 8.0	7	9.8	30.6	3,000	15	680		
LT245/75R17	121S	E	BLK	742104681	229092	6.5 - 7.5	7	9.8	31.5	3,195	15	660		
LT265/70R17	121S	E	BLK	742661681	228956	7.0 - 8.5	8	10.7	31.7	3,195	15	656		
LT285/70R17	121R	E	OWL	742096680	229123	7.5 - 9.0	8.5	11.5	33	3,195	15	630		
LT265/70R18	124S	E	OWL	742014680	229122	7.0 - 9.0	8	10.7	32.6	3,525	15	638		
LT275/65R18	123S	E	OWL	742965680	229097	7.5 - 9.0	8	11	32.1	3,415	15	648		
LT275/70R18	125R	E	OWL	742646680	229096	7.0 - 8.5	8	11	33.2	3,640	15	627		
LT275/65R20	126S	E	BSL	742303681	231395	7.5 - 9.5	8.0	11.0	34.1	3,750	12	613		CHEVROLET SILVERADO HD (19-21), GMC SIERRA HD (19-21)

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



WRANGLER TERRITORY® AT

An All-Terrain Tire Engineered for Original Equipment Fitments



TREAD DESIGN "A"

FEATURES

- All-terrain tread pattern
- Multi-angle tread sipes
- Original equipment tuned tire construction

BENEFITS

- Versatility and year-round traction for where your journey takes you
- Aids all-season traction capabilities on and off the road
- Balanced on and off-road traction with a comfortable ride



TREAD DESIGN "B" TREAD DESIGN "C"
WRANGLER TERRITORY AT TREAD PATTERNS VARY WITH SIZE AND APPLICATION



Chosen as Original Equipment by Global Vehicle Manufacturers

WRANGLER TERRITORY AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
275/65R18	116T	SL	OWL	734001586	240363	7.5 - 9.5	8.0	11	32.1	2,756	11	651	580 B B	FORD F-150 *Tread Design B* (20-21)
LT325/65R18	121T	D	BSL	733259838	237416	9.0 - 12.0	9.5	13	34.8	2,910	15	604		RAM 1500 TRX *Tread Design C* (21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER ENFORCER® AT

A Pursuit-Ready All-Terrain Tire that Offers Confident On and Off-Road Versatility



FEATURES

Aggressive shoulder blocks and wide lateral grooves

Multi-angle tread sipes

Robust Construction

BENEFITS

Help to provide confident maneuverability in on/off road conditions

Aids all-season traction capabilities on and off the road

Helps to handle the demand and operating conditions that police vehicle encounter



All-Terrain



Chosen as Original Equipment
by Global Vehicle Manufacturers

WRANGLER ENFORCER AT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
LT265/70R18	113H	C	BSL	108028861	240026	7.0 - 9.0	8	11	32.9	2,535	11	634		FORD F-150 SSV POLICE (21)

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



WRANGLER® AT/S

A Tough On-/Off-Road Tire

FEATURES

- Self-cleaning, dual Traction Lug Channels™
- Aggressive wraparound shoulder design
- Wide, deep lateral grooves
- Tough tread compound

BENEFITS

- Superb mud, water and snow evacuation for all-surface traction
- Enhances looks and off-road traction
- Enhance snow and on- and off-road traction
- Offers tough off-road performance



All-Terrain



Chosen as Original Equipment
by Global Vehicle Manufacturers

WRANGLER AT/S SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
* P265/70R17	113S	SL	BSL	410422177	163884	7.0 - 9.0	8	10.7	31.7	2,535	13	660	360 A B	
P265/70R17	113S	SL	OWL	410422176	163887	7.0 - 9.0	8	10.7	31.7	2,535	13	660	360 A B	CHEVROLET SILVERADO (13-14), GMC SIERRA (13-14)
WRANGLER AT/S LT														
LT215/75R15	106S	D	BSL	411154177	177076	5.5 - 7.0	6	8.5	27.7	2,095	15	755		

*Discontinued 2020

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WRANGLER® AT

A Trusted Tire Offering Year-Round Traction



FEATURES

Easy-rolling radial construction

Large footprint

Tread lugs with multiple biting edges

BENEFITS

Offers responsive steering and handling

Provides a broad traction base and long tread life

Offer excellent on- and off-road traction



All-Terrain

WRANGLER AT SPECIFICATIONS

SIZE	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
LT195/75R14	C	HBW	740036515	219176	5.0 - 6.5	5.5	7.7	25.5	1,435	15	819	

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

WRANGLER DURATRAC®

A Versatile Tire for Tough Off-Road Terrain and Snow with Long Tread Life and Aggressive Looks While Still Offering a Comfortable On-Road Experience



FEATURES	BENEFITS
1. TractiveGroove Technology	Offers enhanced traction in deep mud and snow
2. Self-cleaning shoulder blocks	Help provide enhanced dirt, gravel and mud traction
3. Highly angled center tread blocks	Help provide enhanced traction and lateral stability while reducing road noise
4. Rim protector	Helps protect wheels from accidental curb damage
5. LT sizes pinned for #16 metal studs†	Enhanced traction in winter driving conditions

PERFORMANCE RATINGS

Dry Traction	8
Wet Traction	8
Snow Traction	9
Off-Road Traction	9
Ride Comfort	7
Quiet Ride	6

50000 *
MILE TREAD LIFE
LIMITED WARRANTY

80,000 Kilometre
Tread Life
Limited Warranty
Metric Sizes Only



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow



Chosen as Original Equipment
by Global Vehicle Manufacturers

† Applies to LT sizes. Consult state and provincial laws regarding stud use. Use stud #16.

* See warranty brochure for complete details.

WRANGLER DURATRAC SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
255/70R16	111S	SL	BSL	150567601	223249	6.5 - 8.5	7.5	10.2	30.1	2,403	16	694	500 B B	
265/70R16	112S	SL	BSL	150564601	223310	7.0 - 9.0	8	10.7	30.6	2,469	16	682	500 B B	
245/70R17	110S	SL	BSL	150675601	223247	6.5 - 8.0	7	9.8	30.6	2,337	16	683	500 B B	
255/75R17	115S	SL	BSL	150684601	225681	6.5 - 8.5	7	10	32	2,679	16	653	500 B B	
265/65R17	112S	SL	BSL	150153601	223248	7.5 - 9.5	8	10.7	30.6	2,469	16	683	500 B B	CHEVROLET COLORADO (17-21), GMC CANYON (18-21)
265/70R17	115S	SL	BSL	150154601	223243	7.0 - 9.0	8	10.7	31.7	2,679	16	659	500 B B	
255/70R18	113S	SL	BSL	150524601	223301	6.5 - 8.5	7.5	10.2	32.1	2,535	16	651	500 B B	
**255/70R18	116Q	XL	BLT	150014574	240964	6.5 - 8.5	7.5	10.2	32.09	2,756	16	651	320 A B	LAND ROVER DEFENDER (20-21)
265/60R18	110S	SL	BSL	150525601	223309	7.5 - 9.5	8	10.7	30.5	2,337	16	685	500 B B	
265/65R18	114S	SL	BSL	150644601	223320	7.5 - 9.5	8	10.7	31.5	2,601	16	663	500 B B	CHEVROLET SILVERADO (15-19), CHEVROLET TAHOE (15-20), GMC SIERRA (15-19), GMC YUKON (15-20)
275/65R18	116S	SL	BSL	150638601	223304	7.5 - 9.5	8	11	32.1	2,756	16	651	500 B B	
**255/55R19	111Q	XL	BLT	150884574	232662	7.0 - 9.0	8	10.4	30	2,403	16	696	320 A B	LAND ROVER DISCOVERY IV (09-16)
**255/65R19	114Q	XL	BLT	150012574	240962	7.0 - 9.0	7.5	10.24	32.08	2,601	16	652	320 A B	LAND ROVER DEFENDER (20-21)
**255/55R20	110Q	XL	BLT	150009601	236553	7.0 - 9.0	8	10.4	31.3	2,337	16	674	320 A B	LAND ROVER DISCOVERY (18-21), LAND ROVER RANGE ROVER (18-21), LAND ROVER RANGE ROVER SPORT (18-21)
**255/60R20	113Q	XL	BLT	150013574	240963	7.0 - 9.0	7.5	10.24	32.05	2,535	15	652	320 A B	LAND ROVER DEFENDER (20-21)
275/55R20	113T	SL	BSL	150008601	236099	7.5 - 9.5	8.5	11.2	31.9	2,535	16	655	500 B B	
275/60R20	115S	SL	BSL	150678601	223307	7.5 - 9.5	8	11	33	2,679	16	633	500 B B	
WRANGLER DURATRAC LT														
31X10.50R15LT	109Q	C	OWL	312007027	208386	7.0 - 9.0	8.5	10.6	30.8	2,270	18	681		
33X12.50R15LT	108Q	C	OWL	312020027	208399	8.5 - 11.0	10	12.5	32.8	2,205	18	635		
LT235/75R15	104Q	C	OWL	312008027	208387	6.0 - 7.0	6.5	9.3	28.9	1,985	18	724		
LT215/85R16	115Q	E	BSL	312010142	208389	5.5 - 7.0	6	8.6	30.5	2,680	18	688		
LT225/75R16	115Q	E	BSL	312009142	208388	6.0 - 7.0	6	8.8	29.3	2,680	18	714		
LT235/85R16	120Q	E	BSL	312036142	220217	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659		
LT245/75R16	120Q	E	OWL	312249027	208316	6.5 - 8.0	7	9.8	30.7	3,042	18	681		
LT245/75R16	108Q	C	OWL	312017027	208396	6.5 - 8.0	7	9.8	30.7	2,205	18	686		
LT265/75R16	112Q	C	OWL	312018027	208414	7.0 - 8.0	7.5	10.5	31.7	2,470	18	660		MAHINDRA ROXOR (20-21)
LT265/75R16	123Q	E	BSL	312034142	223558	7.0 - 8.0	7.5	10.5	31.7	3,415	18	659		
LT285/75R16	126P	E	BSL	312035142	223557	7.5 - 9.0	8	11.3	33.1	3,750	18	637		
LT315/75R16	127Q	E	BSL	312013142	208392	8.0 - 10.0	8.5	12.3	34.8	3,860	18	605		
35X12.50R17LT	121Q	E	BSL	312054142	233085	8.5 - 11.0	10	12.5	34.8	3,195	18	598		
LT235/80R17	120Q	E	BSL	312032142	216880	6.0 - 7.5	6.5	9.3	31.8	3,085	18	654		
LT245/70R17	119Q	E	BSL	312022142	208401	6.5 - 8.0	7	9.8	30.6	3,000	18	684		
LT245/75R17	121Q	E	OWL	312023027	208347	6.5 - 7.5	7	9.8	31.7	3,195	18	663		
LT265/70R17	121Q	E	BSL	312014142	208393	7.0 - 8.5	8	10.7	31.7	3,195	18	659		
LT265/70R17	112Q	C	OWL	312019027	208398	7.0 - 8.5	8	10.7	31.7	2,470	18	660		
LT285/70R17	121Q	D	OWL	312015027	208394	7.5 - 9.0	8.5	11.5	33	3,195	18	638		RAM 2500 POWER WAGON (13-21)
LT285/70R17	121Q	E	OWL	312052027	233083	7.5 - 9.0	8.5	11.2	33	3,195	18	630		
§ LT285/70R17	116S	C	OWL	312076027	237331	7.0 - 9.0	8.5	11.5	32.8	2,755	18	638		
LT295/70R17	121Q	E	BSL	312053142	233084	7.5 - 10.0	8.5	11.6	33.5	3,195	18	621		
LT315/70R17	121Q	D	BSL	312031142	208413	8.5 - 10.0	9.5	12.7	34.4	3,195	18	607		
* 35X12.50R18LT	118Q	D	BSL	312060142	233089	8.5 - 11.0	10	12.5	34.8	2,910	18	598		
* 35X12.50R18LT	123Q	E	BSL	312061142	233090	8.5 - 11.0	10	12.5	34.8	3,415	18	598		
35X12.50R18LT	128Q	F	BSL	312079142	239170	8.5 - 11.0	10.0	12.5	34.8	3,970	18	598		
LT275/65R18	123Q	E	BSL	312011142	208390	7.5 - 9.0	8	11	32.1	3,415	18	651		CHEVROLET SILVERADO HD (15-19), GMC SIERRA HD (15-19)
**LT275/65R18	113Q	C	BSL	312067142	231391	7.5 - 9.0	8	11	32.1	2,535	18	651		CHEVROLET SILVERADO (19-21), GMC SIERRA (19-21)
LT275/70R18	125Q	E	BSL	312012142	208391	7.0 - 8.5	8	11	33.4	3,640	18	630		
**LT275/70R18	125R	E	OWL	312065027	231399	7.0 - 8.5	8	11	33.4	3,640	18	630		RAM 1500 REBEL (18-21)
LT285/65R18	121Q	D	OWL	312055027	233086	8.0 - 10.0	8.5	11.2	32.8	3,195	18	634		
LT285/65R18	125Q	E	OWL	312058027	233087	8.0 - 10.0	8.5	11.2	32.8	3,640	18	634		
LT285/75R18	129Q	E	BSL	312059142	233088	7.5 - 9.5	8	11.2	35.1	4,080	18	593		
**LT285/75R18	129Q	E	BSL	312084142	242127	7.5 - 9.5	8.0	11.26	34.84	4,080	18	600		FORD SUPERDUTY (F-250/350) (20-21)
LT295/65R18	127P	E	BSL	312024142	208348	8.0 - 10.0	8.5	11.8	33.1	3,860	18	624		
LT295/70R18	129Q	E	BSL	312081142	239178	7.5 - 10.0	8.5	11.8	34.8	4,080	18	598		
LT325/65R18	127Q	E	BSL	312016142	208395	9.0 - 12.0	9.5	13	34.8	3,860	18	597		
33X12.50R20LT	114Q	E	BSL	312064142	233101	8.5 - 11.0	10	12.5	32.8	2,600	18	634		
* 35X12.50R20LT	121Q	E	BSL	312063142	233103	8.5 - 11.0	10	12.5	34.8	3,195	18	598		
35X12.50R20LT	128Q	F	BSL	312080142	239173	8.5 - 11.0	10.0	12.5	34.8	3,640	18	598		
37X12.50R20LT	128Q	F	BSL	312077142	239161	8.5 - 11.0	10.0	12.5	36.5	3,970	18	572		
LT275/65R20	126Q	E	BSL	312025142	208349	7.5 - 9.5	8	11	34.1	3,750	18	610		
LT285/60R20	125Q	E	BSL	312028142	208350	8.0 - 10.0	8.5	11.5	33.5	3,640	18	622		
LT305/55R20	121Q	E	BSL	312030142	208412	8.5 - 11.0	9.5	12.4	33.2	3,195	18	622		
LT325/60R20	126Q	E	BSL	312029142	208411	9.0 - 12.0	9.5	13	35.6	3,750	18	584		
37X13.50R22LT	128Q	F	BSL	312078142	239164	8.5 - 11.0	11.0	13.6	36.5	3,970	18	572		

** Not pinned for studs & does not contain the Severe Snow Conditions symbol.

‡ Not marked with the Severe Snow Conditions Symbol.

§ Not pinned for studs

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.


WRANGLER® WORKHORSE® RT

Hardworking, All-Season Dependability With Rough Terrain Traction



FEATURES	BENEFITS
1. Robust tread compound	Allows the tire to resist chipping and chunking
2. Aggressive tread pattern	Features large blocks which enhances traction in dirt, gravel, and mud
3. Biting edges and deep grooves	When combined with a uniquely designed tread compound provides enhanced winter capability
4. Pinned for optional studs†	Provides the ability to further enhance winter traction
5. Rim protector	Helps protect wheels against accidental curb damage

PERFORMANCE RATINGS

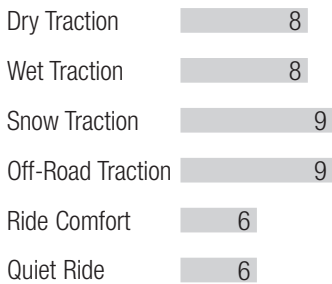

40000 *
MILE TREAD LIFE
LIMITED WARRANTY

65,000 Kilometre
Tread Life
Limited Warranty



30-Day Goodyear® Pledge
See page 11 for complete details.

ADDITIONAL POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



All-Terrain



Severe Snow

**

* See warranty brochure for complete details.

** Marked with the Severe Snow Conditions Symbol.

† Consult state and provincial laws regarding stud use. Use stud #16.

WRANGLER WORKHORSE RT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG
31X10.50R15LT	109 R	C	OWL	176510877	241514	7.0 - 9.0	8.5	10.6	30.8	2,270	18	681	
33X12.50R15LT	108 R	C	OWL	176338877	241515	8.5 - 11.0	10	12.5	32.8	2,205	18	635	
LT235/75R15	104 R	C	OWL	176511877	241513	6.0 - 7.0	6.5	9.3	28.9	1,985	18	724	
LT225/75R16	115 R	E	BSL	176748876	241516	6.0 - 7.0	6	8.8	29.3	2,680	18	714	
LT235/85R16	120 R	E	BSL	176745876	241517	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659	
LT245/75R16	120 R	E	OWL	176747877	241518	6.5 - 8.0	7	9.8	30.7	3,042	18	681	
LT265/70R16	121 R	E	BSL	176016876	241519	7.0 - 8.5	8	10.7	30.6	3,195	18	682	
LT265/75R16	123 R	E	BSL	176746876	241520	7.0 - 8.0	7.5	10.5	31.7	3,415	18	659	
LT235/80R17	120 R	E	BSL	176635876	241531	6.0 - 7.5	6.5	9.3	31.8	3,085	18	654	
LT245/70R17	119 R	E	BSL	176469876	241532	6.5 - 8.0	7	9.8	30.6	3,000	18	684	
LT245/75R17	121 R	E	OWL	176236877	241533	6.5 - 7.5	7	9.8	31.7	3,195	18	663	
LT265/70R17	121 R	E	BSL	176535876	241534	7.0 - 8.5	8	10.7	31.7	3,195	18	659	
LT285/70R17	121 R	E	OWL	176096877	241535	7.5 - 9.0	8.5	11.2	33	3,195	18	630	
LT265/70R18	124 R	E	BSL	176282876	241536	7.0 - 9.0	8	10.7	32.6	3,525	18	640	
LT275/65R18	123 R	E	BSL	176092876	241537	7.5 - 9.0	8	11	32.1	3,415	18	651	
LT275/70R18	125 R	E	BSL	176139876	241538	7.0 - 8.5	8	11	33.4	3,640	18	630	
LT275/55R20	120 R	E	BSL	176280876	241539	7.0 - 9.5	8.5	11.2	31.9	3,085	18	655	
LT275/60R20	119 R	E	BSL	176279876	241540	7.0 - 9.5	8	11	33	3,000	18	634	
LT275/65R20	126 R	E	BSL	176090876	241541	7.5 - 9.5	8	11	34.1	3,750	18	610	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.


WRANGLER MT/R® WITH KEVLAR®

An Extreme Off-Road Expedition Tire Reinforced with DuPont™ Kevlar® Fiber Plus Durawall® Technology to Help Resist Punctures When Powering Over Rocks, Mud and Sand



FEATURES	BENEFITS
1. DuPont™ Kevlar® reinforced sidewalls	Offer rugged strength for confident off-road driving
2. Hardworking wraparound tread	Offers enhanced sidewall traction in deep mud, sand and rocks
3. Innovative asymmetric tread design	Offers aggressive off-road traction while maintaining enhanced handling on the road
4. Advanced silica rubber	For superb off-road and wet traction
5. Durawall Technology	Helps resist sidewall cuts and punctures

PERFORMANCE RATINGS

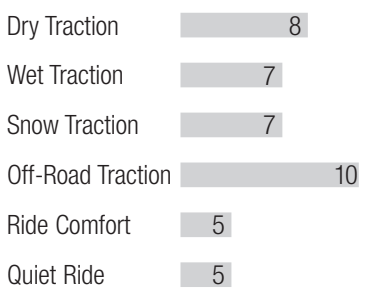

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Rugged Toughness from DuPont™ Kevlar®



Off-Road

DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company used under license by The Goodyear Tire & Rubber Company and affiliates.

WRANGLER MT/R WITH KEVLAR® SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
31X10.50R15LT	109Q	C	BSL	750710326	219336	7.0 - 9.0	8.5	10.6	30.8	2,270	19	681
32X11.50R15LT	113Q	C	BSL	750732326	219346	8.0 - 10.0	9	11.4	31.8	2,535	21	655
33X12.50R15LT	108Q	C	BSL	750711326	219335	8.5 - 11.0	10	12.5	32.8	2,205	21	635
35X12.50R15LT	113Q	C	BSL	750712326	208009	8.5 - 11.0	10	12.5	34.8	2,535	21	598
LT235/85R16	120Q	E	BSL	750713326	208010	6.0 - 7.5	6.5	9.3	31.7	3,042	18	659
LT245/75R16	120Q	E	BSL	750151326	219334	6.5 - 8.0	7	9.8	30.7	3,042	18	686
LT265/75R16	123Q	E	BSL	750153326	219332	7.0 - 8.0	7.5	10.5	31.7	3,415	18	660
LT285/75R16	126Q	E	BSL	750451326	219333	7.5 - 9.0	8	11.3	33.1	3,750	18	637
LT305/70R16	124Q	E	BSL	750475326	219344	8.0 - 9.5	9	12.2	33.1	3,525	18	637
LT315/75R16	121Q	D	BSL	750554326	207999	8.0 - 10.0	8.5	12.3	34.8	3,195	21	598
LT245/70R17	119Q	E	BSL	750140326	219342	6.5 - 8.0	7	9.8	30.6	3,000	18	684
LT245/75R17	121Q	E	BSL	750707326	219339	6.5 - 7.5	7	9.8	31.7	3,195	18	663
LT255/75R17	111Q	C	BSL	750687326	208560	6.5 - 8.5	7	10	32.3	2,405	19	644
LT265/70R17	121Q	E	BSL	750152326	219331	7.0 - 8.5	8	10.7	31.7	3,195	18	660
LT275/70R17	121Q	E	BSL	750393326	219349	7.0 - 8.5	8	11	32.4	3,195	18	649
LT285/70R17	121Q	D	BSL	750434326	219280	7.5 - 9.0	8.5	11.5	33	3,195	19	638
LT305/70R17	119Q	D	BSL	750542326	219337	8.0 - 9.5	9	12.2	34.1	3,000	19	617
LT275/80R17	121Q	D	BSL	750190326	236357	7.5 - 9.0	8	11	34.3	3,195	21	600
LT315/70R17	121Q	D	BSL	750551326	219340	8.5 - 10.0	9.5	12.7	34.7	3,195	21	607
33X10.50R17LT	118Q	D	BSL	750185326	236399	7.0 - 9.0	8.5	10.5	33	2,910	21	638
35X12.50R17LT	111Q	C	BSL	750740326	208003	8.5 - 11.0	10	12.5	34.8	2,405	21	598
37X12.50R17LT	124Q	D	BSL	750578326	208000	8.5 - 11.0	10	12.5	36.8	3,525	21	566
38X14.50R17LT	121Q	D	BSL	750736326	208013	10.0 - 12.0	12	14.7	37.8	3,195	21	551
40X13.50R17LT	121Q	C	BSL	750622326	208001	8.5 - 11.0	11	13.6	39.8	3,195	21	523
42X14.50R17LT	121Q	C	BSL	750625326	208002	10.0 - 12.0	12	14.7	41.8	3,195	21	498
LT275/65R18	113Q	C	BSL	750392326	219348	7.5 - 9.0	8	11	32.1	2,535	19	651
LT275/70R18	125Q	E	BSL	750432326	219338	7.0 - 8.5	8	11	33.4	3,640	18	630
LT295/70R18	129Q	E	BSL	750188326	236421	7.5 - 10.0	8.5	11.8	34.8	4,080	18	598
LT285/75R18	129P	E	BSL	750116326	226371	7.5 - 9.5	8	11.3	35.1	4,080	18	593
33X10.50R18LT	116Q	D	BSL	750186326	236400	7.0 - 9.0	8.5	10.5	32.5	2,755	21	635
35X12.50R18LT	123Q	E	BSL	750032326	216875	8.5 - 11.0	10	12.5	34.8	3,415	18	598
37X13.50R18LT	124Q	D	BSL	750189326	236355	8.5 - 11.0	11	13.6	37	3,525	21	566
LT275/65R20	126Q	E	BSL	750714326	208011	7.5 - 9.5	8	11	34.1	3,750	18	610
LT285/65R20	127Q	E	BSL	750435326	207993	8.0 - 10.0	8.5	11.5	34.8	3,860	18	598
33X12.50R20LT	114Q	E	BSL	750035326	216879	8.5 - 11.0	10	12.5	32.8	2,600	18	633
35X12.50R20LT	121Q	E	BSL	750002326	216874	8.5 - 11.0	10	12.5	34.8	3,195	18	598
37X12.50R20LT	126Q	E	BSL	750191326	236356	8.5 - 11.0	10	12.5	37.1	3,750	18	566

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



TREAD DESIGN "A"

WRANGLER TERRITORY® MT

A Maximum Traction Tire Engineered for Original Equipment Fitments

FEATURES	BENEFITS
Open tread design	Helps the tread clear mud from the tire for traction
Bold wrap around shoulder design	Helps provide added traction in deep mud and snow
Proprietary sequenced pitch pattern	Reduced tread pattern noise



TREAD DESIGN "B"
WRANGLER TERRITORY MT
TREAD PATTERN VARIES
WITH SIZE AND APPLICATION



Off-Road



Chosen as Original Equipment
by Global Vehicle Manufacturers

WRANGLER TERRITORY MT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE	UTQG	ORIGINAL EQUIPMENT FITMENT
LT285/70R17	116S	C	BSL	796285833	242088	7.0 - 9.0	8.5	11.5	32.8	2,755	17	638		FORD BRONCO *Tread Design A* (21)
LT315/70R17	113S	C	BSL	796270833	240261	8.0 - 11.0	9.5	12.7	34.4	2,535	16	608		FORD BRONCO *Tread Design A* (21)
LT265/60R20	110S	C	BSL	796265833	237410	8.0 - 10.0	8.0	10.7	32.5	2,335	15	643		CHEVROLET SILVERADO *Tread Design B* (21), GMC SIERRA AT4 *Tread Design B* (21)

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

FIERCE ATTITUDE M/T®

A Rugged Tire Offering Intense Mud Performance and Looks to Match



FEATURES	BENEFITS
1. Rugged mud terrain tread pattern	Helps provide traction in deep mud conditions
2. Staggered shoulder blocks	Help enhance grip for off-road driving
3. Rim flange protector	Helps protect rims from accidental damage



ALL-TERRAIN

FIERCE ATTITUDE M/T SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
* LT235/85R16	120P	E	BSL	357328294	220282	6.0 - 7.5	6.5	9.3	31.7	3,042	19	659
* LT265/75R16	123P	E	BSL	357334294	223555	7.0 - 8.0	7.5	10.5	31.7	3,415	19	660
* LT285/75R16	126P	E	BSL	357584294	223553	7.5 - 9.0	8	11.3	33.1	3,750	19	637
* LT265/70R17	121P	E	BSL	357368294	208507	7.0 - 8.5	8	10.7	31.7	3,195	19	660
* LT285/70R17	121P	D	OWL	357435295	217711	7.5 - 9.0	8.5	11.5	33	3,195	19	638
* 35X12.50R17LT	119P	D	BSL	357351294	208510	8.5 - 11.0	10	12.5	34.8	3,000	19	597
* LT275/65R18	123P	E	BSW	357442088	218196	7.5 - 9.0	8	11	32.1	3,415	19	651
* LT275/70R18	125P	E	BSL	357379294	208511	7.0 - 8.5	8	11	33.4	3,640	19	630
* LT325/65R18	127P	E	BSL	357523294	208513	9.0 - 12.0	9.5	13	34.8	3,860	19	597
* 35X12.50R18LT	123Q	E	BSL	357014294	234987	8.5 - 11.0	10	12.5	35.4	3,415	19	605
* LT275/65R20	126Q	E	BSL	357011294	234984	7.5 - 9.5	8	11	34.3	3,750	19	613
* LT285/60R20	125Q	E	BSL	357012294	234985	8.0 - 10.0	8.5	11.5	33.7	3,640	19	625
35X12.50R20LT	121Q	E	BSL	357013294	234986	8.5 - 11.0	10	12.5	35.4	3,195	19	605

*Discontinued 2020
Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



WRANGLER ENFORCER® MT

Our Rugged Off-Road Tire Purpose-Built for HMMWV Military Applications



Off-Road

WRANGLER ENFORCER MT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
37X12.50R16.5LT	127N	D	SBL	779026859	240997	10	9.0 - 10.5	12.5	36.8	3,850	21	566
37X12.50R16.5LT	133N	E	SBL	779025859	240996	10	9.0 - 10.5	12.5	36.8	4,540	21	556

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.



WRANGLER® MT

A Rugged Off-Road Tire Designed for Military Applications



Off-Road

WRANGLER MT SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
37X12.50R16.5LT	127N	D	BSL	743123154	184251	8.3 - 9.8	9.8	12.4	26.5	3,850	19	571

NOTE: When replacing a vehicle's original equipment light truck tires with passenger car tires, the load on each replacement car tire must not exceed the maximum load stamped on the replacement car tire sidewall divided by 1.10.

This Goodyear tire includes Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ENDURANCE®

Tow with Confidence



FEATURES	BENEFITS
1. Polyester Construction Reinforced with Steel Belts	Carries heavy-duty loads
2. Optimized Tread Depth and Decoupling Groove	Operate at lower temperatures when properly inflated
3. Enhanced Tread Pattern	Tracks straight for a smooth drive
4. Enhanced Inner Liner	Minimizes air loss while towing
5. Durawall® Technology and Scuff Guard	Defend against sidewall scuffs and punctures

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

ENDURANCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
ST205/75R14	105N	D	BSW	724864519	232865	5.0 - 6.5	5.5	8	26.1	2,040	8	797
ST215/75R14	108N	D	BSW	724865519	232866	5.5 - 7.0	6	8.5	26.7	2,200	8	779
ST205/75R15	107N	D	BSW	724861519	232551	5.0 - 6.5	5.5	8	27.1	2,150	8	768
ST225/75R15	117N	E	BSW	724857519	231946	6.0 - 7.0	6	8.7	28.3	2,830	8	735
ST235/80R16	123N	E	BSW	724858519	231947	6.0 - 7.5	6.5	9.3	30.8	3,420	8	675
ST235/85R16	125N	E	BSW	724860519	231948	6.0 - 7.5	6.5	9.3	31.7	3,640	8	659
ST255/85R16	129N	E	BSW	724862519	231949	6.0 - 8.0	7	10	33.1	4,080	8	631

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ALL-TERRAIN

WINTER



Eagle Enforcer® Winter	WinterCommand® Ultra	WinterCommand®
A Pursuit-Ready Winter Tire That Offers Confident Snow and Ice Traction Plus Responsive Handling	Harness the Road Ahead	For Those Who Want to Carve Their Own Path in Harsh Winter Weather

		Snow Traction	Ice Traction	Wet Traction	Handling	Ride Comfort
PERFORMANCE	Eagle Enforcer Winter	9	9	9	9	8
	COMMUTER TOURING	WinterCommand Ultra	10	10	9	9
WinterCommand		9	9	8	8	9

NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance

The rating scale can help you compare tires within each product category. However, using the scale to distinguish between tires across different types of product categories would be misleading.



	PERFORMANCE						COMMUTER		SUV	
	Ultra Grip® Performance Gen-1 (Pg. 116)	Ultra Grip® 8 Performance (Pg. 118)	Ultra Grip® 8 Performance ROF (Pg. 118)	Eagle Enforcer™ Winter (Pg. 119)	Eagle® Ultra Grip® GW-3 (Pg. 120)	Eagle® Ultra Grip® GW-2 (Pg. 120)	WinterCommand® Ultra (Pg. 122)	WinterCommand® Passenger (Pg. 124)	Ultra Grip® Winter (Pg. 126)	Ultra Grip® SUV ROF (Pg. 127)
175/65R14									*82T	
175/70R14									84T	
185/70R14									*88T	
195/70R14									91T	
175/65R15							84H			
185/55R15							82H			
185/60R15							84T		84T	
185/65R15							88T	88T	*88T	
195/55R15									85T	
195/60R15								88T	*88T	
195/65R15							91T	91T		
205/60R15									*91T	
205/65R15								94T	*94T	
205/70R15									96T	
195/55R16										
205/55R16							94H	94T		
205/60R16							96H	92T		
205/65R16							99H	95T		
215/55R16							97H	97T		
215/60R16							99H	95T	*95T	
215/65R16							102T	98T	*98T	
215/70R16								100T		
225/60R16						97V	102H	98T	*98T	
225/65R16								100T	*100T	
225/70R16								103S		
235/60R16								100T	*100T	
235/70R16								95T		
245/75R16								111S		
265/70R16								112S		
LT245/75R16								E		
LT265/75R16								E		
205/50R17	98H						93H			
215/45R17							91H			
215/50R17							95H	95T		
215/55R17							98H	98T		
215/60R17								100T		
215/65R17							103T	99T	*99T	
225/45R17							94H			
225/50R17							98H	98T	*94T	
225/55R17							101H	97T	*97T	
225/60R17								99T		
225/65R17							102H	102T	*102T	
235/55R17					98V		99H	99T	*99T	
235/60R17								102T		
235/65R17							104H	104T	*104T	
245/65R17								107S		
255/70R17								112S		
265/60R17				108H						
265/65R17								112S		
265/70R17								115S		
LT245/70R17								E		
LT245/75R17								E		
LT265/70R17								E		

*Discontinued in 2020

WINTER TIRE SELECTOR CHART

	PERFORMANCE						COMMUTER			SUV
	Ultra Grip® Performance Gen-1 (Pg. 116)	Ultra Grip® 8 Performance (Pg. 118)	Ultra Grip® 8 Performance ROF (Pg. 118)	Eagle Enforcer™ Winter (Pg. 119)	Eagle® Ultra Grip® GW-3 (Pg. 120)	Eagle® Ultra Grip® GW-2 (Pg. 120)	WinterCommand® Ultra (Pg. 122)	WinterCommand® Passenger (Pg. 124)	Ultra Grip® Winter (Pg. 126)	Ultra Grip® SUV ROF (Pg. 127)
205/45R18	90H									
225/40R18							92V			
225/45R18							95V			
225/50R18							99H	99T		
225/55R18							102V	98T		
225/60R18				100V			100H	100T		
235/45R18							98H			
235/50R18					101V		101V	97T		
235/55R18	104H						100H	100T		
235/60R18							103H	107T		
235/65R18							106V	106T		
245/40R18							97V			
245/45R18		*100V	*100V				100V			
245/55R18				103V						
245/60R18							105V	105T		
255/60R18				108V						
255/65R18								111S		
255/70R18								113S		
265/60R18								110S		
265/65R18								114S		
275/65R18								116S		
LT265/70R18								E		
LT275/70R18								E		
225/55R19								103T		
235/40R19							96V			
235/45R19							99H			
235/50R19							103H			
235/55R19							101H	101T		
245/45R19			102V				102V			
245/55R19							103V	103T		
255/35R19							96V			
255/50R19										107H
255/55R19	111H						111H			
235/55R20							102H			
245/45R20	103V									
245/50R20							102V	102T		
255/45R20							105V			
255/50R20							109V	105T		
265/40R20	104V									
265/50R20							107V	107T		
275/45R20							110H			
275/55R20				113V				113S		
275/60R20								115T		
285/40R20	108V	112V								
285/45R22								114T		

*Discontinued in 2020

ULTRA GRIP® PERFORMANCE GEN-1

(Select sizes with ROF)

Excellent Grip and High Handling Performance in All Winter Conditions



FEATURES	BENEFITS
1. Interlocking sipe system	Provides balance of dry handling and snow performance
2. High sipe density	Enhances braking on snow and ice
3. Block activators	Provide grip in snow and ice conditions
4. Hydrodynamic grooves	Help aquaplaning and slush resistance on wet and slushy roads
5. Tread wear indicator	Helps drivers monitor treadwear throughout the life of the tire

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



ULTRA GRIP PERFORMANCE GEN-1 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
205/45R18	90H	XL	BLT	653006580	240894	6.5 - 7.5	7	8.1	25.2	1,323	11	828
235/55R18	104H	XL	BLT	117992564	236574	6.5 - 8.5	7.5	9.7	28.2	1,984	11	742
255/55R19	111H	XL	BLT	117195564	237614	7.0 - 9.0	8	10.4	30	2,403	10	696
245/45R20	103V	XL	BLT	117034564	240777	7.5 - 9.0	8	9.6	28.7	1,929	10	729
265/40R20	104V	XL	BLT	117993564	236575	9.0 - 10.5	9.5	10.7	28.4	1,984	10	737
285/40R20	108V	XL	BLT	117036564	240778	9.5 - 11.0	10	11.4	29	2,205	10	721
ULTRA GRIP PERFORMANCE GEN-1 ROF												
225/50R17	98H	XL	BLT	787064580	239623	6.0 - 8.0	7	9.2	25.9	1,653	11	807

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



ULTRA GRIP® 8 PERFORMANCE

(Select sizes with ROF)

An Ultra High-Performance Tire for Powerful Winter Traction and Handling in Freezing Rain, Snow, Slush and Ice



ULTRA GRIP 8 PERFORMANCE SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
* 245/45R18	100V	XL	BLT	117778373	226514	7.5 - 9.0	8	9.6	26.7	1,764	11	784
255/60R18	108H	SL	BLT	117847373	230514	7.0 - 9.0	7.5	10.2	30	2,205	11	696
285/45R20	112V	XL	BLT	117838373	229729	9.0 -10.5	9.5	11.2	30.1	2,469	11	695
ULTRA GRIP 8 PERFORMANCE ROF												
* 245/45R18	100V	XL	BLT	117799373	227398	7.5 - 9.0	8	9.6	27.7	1,764	11	755
245/45R19	102V	XL	BLT	117798373	227397	7.5 - 9.0	8	9.6	27.7	1,874	11	755

* Discontinued 2020

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately. Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

EAGLE ENFORCER® WINTER

A Pursuit-Ready Winter Tire That Offers Confident Snow and Ice Traction Plus Responsive Handling



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

EAGLE ENFORCER WINTER SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
265/60R17	108H	SL	VSB	732006567	237043	7.5 - 9.5	8.0	10.7	29.5	2,205	11	708
225/60R18	100V	SL	VSB	732003567	237041	6.0 - 8.0	6.5	9.0	28.6	1,764	11	730
245/55R18	103V	SL	VSB	732004567	237042	7.0 - 8.5	7.5	10.0	28.6	1,929	11	730
255/60R18	108V	SL	VSB	732009563	237418	7.0 - 9.0	7.5	10.2	30	2,205	11	696
275/55R20	113V	SL	VSB	732010567	241733	7.5 - 9.5	8.5	11.2	31.9	2,535	11	655

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

EAGLE® ULTRA GRIP® GW-3 EAGLE® ULTRA GRIP® GW-2

(Select sizes with R0F)

A Winter Performance Tire That Offers Responsive Handling and Traction in Wet and Slippery Conditions; Trusted for Use on Many Police Vehicles

- 1. Unique high-performance winter tread compound
- 2. High-blade density with multiple biting edges
- 3. V-TRED™ Technology



EAGLE ULTRA GRIP GW-2
TREAD PATTERN

FEATURES

- 1. Unique high-performance winter tread compound
- 2. High-blade density with multiple biting edges
- 3. V-TRED Technology

BENEFITS

- Offers performance driving in all winter conditions
- Enhances grip in snow and ice with wet and dry steering capability
- Helps evacuate water and slush away from the contact patch

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Severe Snow



Ice Traction



Ultra Wet
Traction



Cornering
Stability



Steering
Responsiveness

EAGLE ULTRA GRIP GW-3 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
P235/55R17	98V	SL	VS	166579530	198865	6.5 - 8.5	7.5	9.7	27.2	1,653	11	769
235/50R18	101V	XL	VS	166041528	220011	6.5 - 8.5	7.5	9.7	27.3	1,819	11	766

EAGLE ULTRA GRIP GW-2 SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
P225/60R16	97V	SL	BS	147354070	118468	6.0 - 8.0	6.5	9	26.6	1,609	11	785

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WINTERCOMMAND® ULTRA

Harness the Road Ahead



FEATURES	BENEFITS
1. Active Block Cuts	Help to transfer lateral forces during maneuvers and maximum handling performance
2. Full-depth, continuous track sipes	Offer enhanced ice traction and braking throughout the life of the tire
3. Functionalized elastomer compound	Adds tread life, increases wet traction, increases flexibility in cold weather
4. ActiveGrip Technology	Delivers superior traction for performance handling in wet conditions
5. Enhanced rim protector	Helps protect wheels against accidental curb damage

PERFORMANCE RATINGS

Snow Traction	10
Ice Traction	10
Wet Traction	9
Handling	9
Ride Comfort	9



30-Day Goodyear® Pledge
See page 11 for complete details.

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration



Severe Snow



Ice Traction



Ultra Wet Traction



Cornering Stability



Steering Responsiveness

WINTERCOMMAND ULTRA SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SE sidewall	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
175/65R15	84H	SL	VS	781030579	238758	5.0 - 6.0	5.0	7.0	24.0	1,102	11	872
185/55R15	82H	SL	VS	781031579	238759	5.0 - 6.5	5.0	7.6	23.0	1,047	11	908
185/60R15	84T	SL	VS	781033579	238761	5.0 - 6.5	5.5	7.5	23.8	1,102	11	878
185/65R15	88T	SL	VS	781019579	238752	5.0 - 6.5	5.5	7.4	24.5	1,235	11	825
195/65R15	91T	SL	VS	781001579	238654	5.5 - 7.0	6.0	7.9	25.0	1,356	11	808
205/55R16	94H	XL	VS	781002579	238655	5.5 - 7.5	6.5	8.4	24.9	1,477	11	811
205/60R16	96H	XL	VS	781007579	238659	5.5 - 7.5	6.0	8.2	25.7	1,565	11	786
205/65R16	99H	XL	VS	781020579	238753	5.5 - 7.5	6.0	8.2	26.5	1,709	11	762
215/55R16	97H	XL	VS	781006579	238658	6.0 - 7.5	7.0	8.9	25.3	1,609	11	797
215/60R16	99H	XL	VS	781003579	238656	6.0 - 7.5	6.5	8.7	26.1	1,709	11	771
215/65R16	102T	XL	VS	781010579	238742	6.0 - 7.5	6.5	8.7	27.0	1,874	11	747
225/60R16	102H	XL	VS	781012579	238744	6.0 - 8.0	6.5	9.0	26.6	1,874	11	758
205/50R17	93H	XL	VS	781018579	238750	5.5 - 7.5	6.5	8.4	25.1	1,433	11	805
215/45R17	91H	XL	VS	781015579	238747	7.0 - 8.0	7.0	8.4	24.7	1,356	11	820
215/50R17	95H	XL	VS	781016579	238748	6.0 - 7.5	7.0	8.9	25.5	1,521	11	792
215/55R17	98H	XL	VS	781005579	238657	6.0 - 7.5	7.0	8.9	26.3	1,653	11	767
215/65R17	103T	XL	VS	781021579	238754	6.0 - 7.5	6.5	8.7	28.0	1,929	11	721
225/45R17	94H	XL	VS	781022579	238755	7.0 - 8.5	7.5	8.9	25.0	1,477	11	808
225/50R17	98H	XL	VS	781011579	238743	6.0 - 8.0	7.0	9.2	25.9	1,653	11	780
225/55R17	101H	XL	VS	781009579	238741	6.0 - 8.0	7.0	9.2	26.8	1,819	11	754
225/65R17	102H	SL	VS	781063579	241567	6.0 - 8.0	6.5	9.0	28.5	1,874	11	733
235/55R17	99H	SL	VS	781008579	238660	6.5 - 8.5	7.5	9.7	27.2	1,653	11	742
235/65R17	104H	SL	VS	781064579	241737	6.5 - 8.5	7.0	9.5	29.1	1,984	11	718
225/40R18	92V	XL	VS	781035579	238763	7.5 - 9.0	8.0	9.1	25.1	1,389	11	833
225/45R18	95V	XL	VS	781013579	238745	7.0 - 8.5	7.5	8.9	25.9	1,521	11	777
225/50R18	99H	XL	VS	781017579	238749	6.0 - 8.0	7.0	9.2	26.9	1,709	11	751
225/55R18	102V	XL	VS	781067579	241740	6.0 - 8.0	7.0	9.2	27.8	1,874	11	752
225/60R18	100H	SL	VS	781023579	238756	6.0 - 8.0	6.5	9.0	28.6	1,709	11	705
235/45R18	98H	XL	VS	781038579	238766	7.5 - 9.0	8.0	9.3	26.3	1,653	11	795
235/50R18	101V	XL	VS	781040579	238768	6.5 - 8.5	7.5	9.7	27.3	1,819	11	766
235/55R18	100H	SL	VS	781014579	238746	6.5 - 8.5	7.5	9.7	28.2	1,764	11	716
235/60R18	107H	XL	VS	781027579	240941	6.5 - 8.5	7.0	9.5	29.1	2,149	11	693
235/65R18	106V	SL	VS	781066579	241739	6.5 - 8.5	7.0	9.5	30.0	1,984	11	696
245/40R18	97V	XL	VS	781044579	238772	8.0 - 9.5	8.5	9.8	25.7	1,609	11	813
245/45R18	100V	XL	VS	781046579	238774	7.5 - 9.0	8.0	9.6	26.7	1,764	11	784
245/60R18	105V	SL	VS	781065579	241738	7.0 - 8.5	7.0	9.8	29.6	2,039	11	706
235/40R19	96V	XL	VS	781037579	238765	8.0 - 9.5	8.5	9.5	26.4	1,565	11	791
235/45R19	99H	XL	VS	781039579	238767	7.5 - 9.0	8.0	9.3	27.4	1,709	11	763
235/50R19	103H	XL	VS	781041579	238769	6.5 - 8.5	7.5	9.7	28.3	1,929	11	739
235/55R19	101H	SL	VS	781042579	238770	6.5 - 8.5	7.5	9.7	29.2	1,819	11	717
245/45R19	102V	XL	VS	781060579	238785	7.5 - 9.0	8.0	9.6	27.7	1,874	11	755
245/55R19	103V	SL	VS	781071579	241804	7.0 - 8.5	7.5	10.0	29.7	1,929	11	705
255/35R19	96V	XL	VS	781049579	238776	8.5 - 10.0	9.0	10.2	26.0	1,565	11	803
255/55R19	111H	XL	VS	781059579	238784	7.0 - 9.0	8.0	10.4	30.0	2,403	11	697
235/55R20	102H	SL	VS	781043579	238771	6.5 - 8.5	7.5	9.7	30.2	1,874	11	693
245/50R20	102V	SL	VS	781068579	241801	7.0 - 8.5	7.5	10.0	29.7	1,874	11	704
255/45R20	105V	XL	VS	781050579	238777	8.0 - 9.5	8.5	10.0	29.1	2,039	11	719
255/50R20	109V	XL	VS	781069579	241802	8.0 - 9.0	8.0	10.4	30.1	2,271	11	695
265/50R20	107V	SL	VS	781070579	241803	7.5 - 9.5	8.5	10.9	30.5	2,149	11	685
275/45R20	110H	XL	VS	781057579	238782	8.5 - 10.0	9.0	10.8	29.8	2,337	11	702

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

WINTERCOMMAND®

For Those Who Want to Carve Their Own Path in Harsh Winter Weather



FEATURES	BENEFITS
1. Specialized winter tread patterns	Tread patterns with multiple biting edges specially designed for your vehicle. Helps to provide starting and stopping power on snow-covered roads
2. Full-depth zigzag sipes	Enhanced snow and ice grip throughout the life of the tire
3. Proven winter tread compound	Maintains flexibility and offers consistent and confident grip at low temperatures
4. Pinned for optional studs [†]	Ability to further enhance traction in winter driving conditions
5. Rim protector*	Helps protect wheels against accidental curb damage

PERFORMANCE RATINGS

Snow Traction	9
Ice Traction	9
Wet Traction	8
Handling	8
Ride Comfort	9



30-Day Goodyear® Pledge
See page 11 for complete details.

POST-PURCHASE PROGRAMS:

- Nationwide Warranty Service
- Online Tire Registration

SCAN HERE FOR PRODUCT VIDEO



[†] Consult state and provincial laws regarding stud use. Use stud #15 for LT sizes. Use stud #12 for all other sizes. See Retailer for complete details.
* Applies to SUV and LT sizes.

WINTERCOMMAND CAR/MINIVAN SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	STUD PIN SIZE	REVS/MILE
185/65R15	88T	SL	BSL	187002565	236692	5.0 - 6.5	5.5	7.4	24.5	1,235	13	12	855
195/60R15	88T	SL	BSL	187005565	236695	5.5 - 7.0	6	7.9	24.2	1,389	13	12	864
195/65R15	91T	SL	BSL	187003565	236693	5.5 - 7.0	6	7.9	25	1,356	13	12	836
205/65R15	94T	SL	BSL	187004565	236694	5.5 - 7.5	6	8.3	25.5	1,477	13	12	820
205/55R16	94T	XL	BSL	187022565	236795	5.5 - 7.5	6.5	8.4	24.9	1,477	13	12	839
205/60R16	92T	SL	BSL	187017565	236791	5.5 - 7.5	6	8.2	25.7	1,389	13	12	813
205/65R16	95T	SL	BSL	187011565	236698	5.5 - 7.5	6	8.2	26.5	1,521	13	12	789
215/55R16	97T	XL	BSL	187023565	236796	6.0 - 7.5	7	8.46	25.3	1,609	13	12	827
215/60R16	95T	SL	BSL	187018565	236792	6.0 - 7.5	6.5	8.7	26.1	1,521	13	12	801
215/65R16	98T	SL	BSL	187012565	236699	6.0 - 7.5	6.5	8.7	27	1,653	13	12	774
215/70R16	100T	SL	BSL	187006565	236696	5.5 - 7.0	6.5	8.7	27.9	1,764	13	12	749
225/60R16	98T	SL	BSL	187020565	236793	6.0 - 8.0	6.5	9	26.6	1,653	13	12	786
225/65R16	100T	SL	BSL	187014565	236700	6.0 - 8.0	6.5	9	27.5	1,764	13	12	760
235/60R16	100T	SL	BSL	187021565	236794	6.5 - 8.5	7	9.5	27.1	1,764	13	12	772
235/70R16	106T	SL	BSL	187010565	236697	6.0 - 8.0	7	9.5	29	2,094	13	12	721
215/50R17	95T	XL	BSL	187035565	236806	6.0 - 7.5	7	8.46	25.5	1,521	13	12	819
215/55R17	98T	XL	BSL	187032565	236803	6.0 - 7.5	7	8.9	26.3	1,653	13	12	795
215/60R17	100T	XL	BSL	187028565	236800	6.0 - 7.5	6.5	8.7	27.2	1,764	13	12	768
215/65R17	99T	SL	BSL	187024565	236797	6.0 - 7.5	6.5	8.7	28	1,709	13	12	746
225/50R17	98T	XL	BSL	187036565	236807	6.0 - 8.0	7	9.2	25.9	1,653	13	12	807
225/55R17	97T	SL	BSL	187033565	236804	6.0 - 8.0	7	9.2	26.8	1,609	13	12	780
225/60R17	99T	SL	BSL	187030565	236801	6.0 - 8.0	6.5	9	27.6	1,709	13	12	757
225/65R17	102T	SL	BSL	187026565	236798	6.0 - 8.0	6.5	9	28.5	1,874	13	12	733
235/55R17	99T	SL	BSL	187034565	236805	6.5 - 8.5	7.5	9.7	27.2	1,709	13	12	768
235/60R17	102T	SL	BSL	187031565	236802	6.5 - 8.5	7	9.5	28.1	1,874	13	12	744
235/65R17	104T	SL	BSL	187027565	236799	6.5 - 8.5	7	9.5	29.1	1,984	13	12	718
255/70R17	112S	SL	BSL	132257788	240021	6.5 - 8.5	7.5	10.2	31.1	2,469	13	12	672
225/50R18	99T	XL	BSL	187062565	236814	6.0 - 8.0	7	9.2	26.9	1,709	13	12	778
225/55R18	98T	SL	BSL	187060565	236812	6.0 - 8.0	7	9.2	27.8	1,653	13	12	752
225/60R18	100T	SL	BSL	187057565	236809	6.0 - 8.0	6.5	9	28.6	1,764	13	12	730
235/50R18	97T	SL	BSL	187063565	236815	6.5 - 8.5	7.5	9.7	27.3	1,609	13	12	766
235/55R18	100T	SL	BSL	187061565	236813	6.5 - 8.5	7.5	9.7	28.2	1,764	13	12	741
235/60R18	107T	XL	BSL	187058565	236810	6.5 - 8.5	7	9.5	29.1	2,149	13	12	718
235/65R18	106T	SL	BSL	187056565	236808	6.5 - 8.5	7	9.5	30	2,094	13	12	697
245/60R18	105T	SL	BSL	187059565	236811	7.0 - 8.5	7	9.8	29.6	2,039	13	12	706
225/55R19	103T	XL	BSL	187037565	240023	6.0 - 8.0	7	9.2	28.8	1,929	13	12	726
235/55R19	101T	SL	BSL	187064565	236816	6.5 - 8.5	7.5	9.7	29.2	1,819	13	12	716
245/55R19	103T	SL	BSL	187065565	236817	7.0 - 8.5	7.5	10	29.7	1,929	13	12	704
245/50R20	102T	SL	BSL	187066565	236818	7.0 - 8.5	7.5	10	29.7	1,874	13	12	704
WINTERCOMMAND SUV													
225/70R16	103S	SL	BSL	132241788	236526	6.0 - 7.5	6.5	9	28.4	1,929	13	12	736
245/75R16	111S	SL	BSL	132128788	236529	6.5 - 8.0	7	9.8	30.5	2,403	13	12	685
265/70R16	112S	SL	BSL	132204788	236535	7.0 - 9.0	8	10.7	30.6	2,469	13	12	683
245/65R17	107S	SL	BSL	132242788	236527	7.0 - 8.5	7	9.8	29.5	2,149	13	12	708
265/65R17	112S	SL	BSL	132245788	236533	7.5 - 9.5	8	10.7	30.6	2,469	13	12	684
265/70R17	115S	SL	BSL	132201788	236537	7.0 - 9.0	8	10.7	31.7	2,679	13	12	660
255/65R18	111S	SL	BSL	132258788	240022	7.0 - 9.0	7.5	10.2	31.1	2,405	13	12	673
255/70R18	113S	SL	BSL	132243788	236531	6.5 - 8.5	7.5	10.2	32.1	2,535	13	12	651
265/60R18	110S	SL	BSL	132244788	236532	7.5 - 9.5	8	10.4	30.5	2,337	13	12	685
265/65R18	114S	SL	BSL	132246788	236534	7.5 - 9.5	8	10.7	31.5	2,601	13	12	663
275/65R18	116S	SL	BSL	132248788	236540	7.5 - 9.5	8	11	32.1	2,756	13	12	651
255/50R20	105T	SL	BSL	132256788	239699	7.0 - 9.0	8	10.4	30.1	2,039	13	12	695
265/50R20	107T	SL	BSL	132124788	239700	7.5 - 9.5	8.5	10.9	30.5	2,149	13	12	686
275/55R20	113S	SL	BSL	132203788	236539	7.5 - 9.5	8.5	11.2	31.9	2,535	13	12	655
275/60R20	115T	SL	BSL	132073788	239697	7.5 - 9.5	8	11	33	2,679	13	12	634
285/45R22	114T	XL	BSL	132146788	239698	9.0 - 10.5	9.5	11.2	32.1	2,601	13	12	651
WINTERCOMMAND LT													
LT245/75R16	120Q	E	BSL	184151786	236528	6.5 - 8.0	7	9.8	30.5	3,042	16	15	686
LT265/75R16	123Q	E	BSL	184153786	236538	7.0 - 8.0	7.5	10.5	31.7	3,415	16	15	660
LT245/70R17	119Q	E	BSL	184140786	237587	6.5 - 8.0	7	9.8	30.6	3,000	16	15	684
LT245/75R17	121Q	E	BSL	184290786	236530	6.5 - 7.5	7	9.8	31.5	3,195	16	15	663
LT265/70R17	121Q	E	BSL	184152786	236536	7.0 - 8.5	8	10.7	31.7	3,195	16	15	660
LT265/70R18	124R	E	BSL	184099786	240024	7.0 - 9.0	8	10.7	32.6	3,527	16	15	640
LT275/70R18	125Q	E	BSL	184432786	236541	7.0 - 8.5	8	11	33.2	3,640	16	15	630

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



ULTRA GRIP® WINTER

A Quality Winter Tire That Provides Confident Traction and Strong Grip in Slippery Winter Conditions



ULTRA GRIP WINTER SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/ MILE
* 175/65R14	82T	SL	BSW	766360355	219632	5.0 - 6.0	5	7	23	1,047	13	910
175/70R14	84T	SL	BSW	766105355	219629	4.5 - 6.0	5	7	23.7	1,102	13	882
* 185/70R14	88T	SL	BSW	766476355	219630	4.5 - 6.0	5.5	7.4	24.3	1,235	13	860
195/70R14	91T	SL	BSW	766736355	219631	5.0 - 6.5	6	7.9	24.8	1,356	13	843
185/60R15	84T	SL	BSW	766739355	219641	5.0 - 6.5	5.5	7.5	23.8	1,102	13	880
* 185/65R15	88T	SL	BSW	766259355	219638	5.0 - 6.5	5.5	7.4	24.5	1,235	13	855
195/55R15	85T	SL	VSB	766709358	219645	5.5 - 7.0	6	7.9	23.4	1,135	13	892
* 195/60R15	88T	SL	BSW	766740355	219642	5.5 - 7.0	6	7.9	24.2	1,235	13	864
* 205/65R15	94T	SL	BSW	766478355	219640	5.5 - 7.5	6	8.3	25.5	1,477	13	820
205/70R15	96T	SL	BSW	766738355	219636	5.0 - 7.0	6	8.2	26.3	1,565	13	795
* 215/60R16	95T	SL	VSB	766562358	219650	6.0 - 7.5	6.5	8.7	26.1	1,521	13	800
* 215/65R16	98T	SL	BSW	766016355	219646	6.0 - 7.5	6.5	8.7	27	1,653	13	774
* 225/60R16	98T	SL	VSB	766715358	219651	6.0 - 8.0	6.5	9	26.6	1,653	13	786
* 225/65R16	100T	SL	VSB	766714358	219647	6.0 - 8.0	6.5	9	27.5	1,764	13	760
* 235/60R16	100T	SL	VSB	766716358	219652	6.5 - 8.5	7	9.5	27.1	1,764	13	772
* 215/65R17	99T	SL	VSB	766719358	219654	6.0 - 7.5	6.5	8.7	28	1,709	13	746
* 225/50R17	94T	SL	VSB	766600358	219661	6.0 - 8.0	7	9.2	25.9	1,477	13	807
* 225/55R17	97T	SL	VSB	766726358	219659	6.0 - 8.0	7	9.2	26.8	1,609	13	780
* 225/65R17	102T	SL	VSB	766720358	219655	6.0 - 8.0	6.5	9	28.5	1,874	13	733
* 235/55R17	99T	SL	VSB	766599358	219660	6.5 - 8.5	7.5	9.7	27.2	1,709	13	768
* 235/65R17	104T	SL	VSB	766722358	219656	6.5 - 8.5	7	9.5	29.1	1,984	13	719

*Discontinued 2020

Do not attempt to mount 16" rim diameter tires on 16.5" rim diameter wheels; this may result in serious injury or death.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

ULTRA GRIP® SUV ROF

An SUV Tire for Enhanced Traction in Severe Winter Driving Conditions



Severe Snow



Ice Traction



Cornering Stability

ULTRA GRIP SUV ROF SPECIFICATIONS

SIZE	SERVICE DESCRIPTION	LOAD RANGE	SIDEWALL	PRODUCT CODE	MATERIAL NUMBER	APPROVED RIM WIDTH (INS)	MEASURING RIM WIDTH (INS)	SECTION WIDTH (INS)	OVERALL DIAMETER (INS)	MAX LOAD (LBS)	TREAD DEPTH (IN 32NDS)	REVS/MILE
255/50R19	107H	XL	BLT	754283318	209368	7.0 - 9.0	8	10.4	29.1	2,150	11	718

ROF, RunOnFlat® radial. Refer to the RunOnFlat owner's manual/limited warranty recommendations on operation at low or no air pressure. Pressure monitoring system required. Sold separately.

These Goodyear tires include Nationwide Warranty Service and Online Tire Registration.

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

GOODYEAR® OE FITMENTS

#1

OE Brand Share

Fitments on a Rich Mix of Vehicles

Ford • Honda • BMW • Mercedes-Benz • Cadillac • Toyota • Lincoln • Tesla • Jeep

Significantly Outperforms the Market for
OE Replacement Loyalty



GOODYEAR® OE FITMENTS



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR								
							2013	2014	2015	2016	2017	2018	2019	2020	2021
ACURA															
	RDX	255/45R20 101V		732007741	EAGLE RS-A	BSW							X	X	X
	TLX	225/55R17 97H		706447163	EAGLE LS-2	VSB			X	X	X	X	X	X	
		225/50R18 95H		706171163	EAGLE LS-2	BSW			X	X	X	X	X	X	
AUDI															
	A5	225/50R17 94H		706567163	EAGLE LS-2	BLT	X	X							
		245/40R18 93H		706014308	EAGLE LS-2	BLT	X	X	X						
	A6	255/40R19 100Y XL		112228344	EFFICIENTGRIP ROF	BLT	X	X							
	A7	255/40R19 100Y XL		112228344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X	X			
		255/40R19 100H XL		706195308	EAGLE LS-2	BLT	X	X							
	A8	255/45R19 104H XL		706073308	EAGLE LS-2	BLT	X	X	X	X	X				
		255/45R19 104H XL		109128382	EAGLE SPORT ALL-SEASON SCT	BLT						X	X	X	X
		265/40R20 104H XL		109139366	EAGLE SPORT ALL-SEASON SCT	BLT						X	X	X	X
		265/40R20 104Y XL		783226394	EAGLE F1 ASYMMETRIC 3 SCT	BLT						X	X	X	X
		265/35R21 101Y XL		783406394	EAGLE F1 ASYMMETRIC 3 SCT	BLT									X
	E-TRON / E-TRON SPORTBACK	255/50R20 109H XL		109147557	EAGLE SPORT ALL-SEASON	BLT							X	X	X
		265/45R21 108H XL		783137544	EAGLE F1 ASYMMETRIC 3 SUV	BLT							X	X	
	Q3	235/55R18 100H		109149569	EAGLE SPORT ALL-SEASON	BLT							X	X	X
		235/50R19 99H		109152569	EAGLE SPORT ALL-SEASON	BLT							X	X	X
	Q5	255/45R20 101W		684011293	EXCELLENCE	BLT	X	X	X	X	X				
	Q7	255/60R18 108H		109099382	EAGLE SPORT ALL-SEASON	BLT				X	X	X	X		
		255/55R19 111H XL		109097395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X	X	X		
		285/45R20 112H XL		109096395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X	X	X		
	S5	245/40R18 93H		706014308	EAGLE LS-2	BLT	X	X							
BMW															
	1 SERIES	205/50R17 89H		706795168	EAGLE LS-2 ROF	BSW	X	X							
		225/45R17 91V		797173556	EAGLE NCT5 ROF	BLT	X	X							
	3 SERIES	225/45R18 91Y	F	112005344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X	X			
		255/40R18 95Y	R	112006344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X	X			
		225/45R18 95Y XL	F	783138385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X
		255/40R18 99Y XL	R	783139385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X
		225/40R19 89Y	F	784044359	EAGLE F1 ASYMMETRIC 2 ROF	BLT	X	X	X	X	X	X			
		255/35R19 92Y	R	784054359	EAGLE F1 ASYMMETRIC 2 ROF	BLT	X	X	X	X	X	X			
		225/40R19 93Y XL	F	783182385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X
	5 SERIES (G30)	255/35R19 96Y XL	R	783494385	EAGLE F1 ASYMMETRIC 3 ROF	BLT						X	X	X	
		225/55R17 97H		109143395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X
		245/45R18 100H XL		109093395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X
		245/40R19 98H XL		109140395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR															
							2013	2014	2015	2016	2017	2018	2019	2020	2021							
BMW (Cont.)																						
5 SERIES (G30) (Cont.)	245/40R19 98Y XL	F	783141385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
	275/35R19 100Y XL	R	783857385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
	245/35R20 95Y XL	F	783129385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
	275/30R20 97Y XL	R	783723385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
5 SERIES / 6 SERIES	225/55R17 97V		706923322	EAGLE LS-2 ROF	BLT	X	X	X	X													
	245/45R18 100V XL		706440322	EAGLE LS-2 ROF	BLT	X	X	X	X													
	245/40R19 98V XL		706387322	EAGLE LS-2 ROF	BLT	X	X	X	X													
	245/40R19 98Y XL	F	111003513	EXCELLENCE ROF	BLT	X	X	X	X	X												
	275/35R19 96Y	R	111446513	EXCELLENCE ROF	BLT	X	X	X	X	X												
7 SERIES	245/50R18 100V		706070322	EAGLE LS-2 ROF	BLT	X	X	X	X	X												
	245/45R19 102V XL		706280322	EAGLE LS-2 ROF	BLT	X	X	X	X	X												
	245/40R20 99Y XL	F	111045513	EXCELLENCE ROF	BLT	X	X	X	X	X												
	275/35R20 102Y XL	R	111048513	EXCELLENCE ROF	BLT	X	X	X	X	X												
8 SERIES	245/35R20 95Y XL	F	783129385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
	275/30R20 97Y XL	R	783723385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
X1	225/50R17 94H		706567308	EAGLE LS-2 ROF	BLT	X	X	X	X													
	225/45R18 91W		112031344	EFFICIENTGRIP ROF	BLT	X	X	X	X													
	225/50R18 95V		109092395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X								
X2	225/50R18 95V		109092395	EAGLE SPORT ALL-SEASON ROF	BLT							X	X	X								
X3	245/50R18 100V		706070322	EAGLE LS-2 ROF	BLT	X	X	X	X	X												
	245/45R19 102V XL		706280322	EAGLE LS-2 ROF	BLT	X	X	X	X	X												
X5	255/55R18 109H XL		706999163	EAGLE LS-2 ROF	BLT		X	X	X	X	X											
	255/50R19 107H XL		706110163	EAGLE LS-2 ROF	BLT		X	X	X	X	X											
	255/50R19 107W XL	F	784305333	EAGLE F1 ASYMMETRIC ROF	BLT		X	X	X	X	X											
	285/45R19 111W XL	R	784306333	EAGLE F1 ASYMMETRIC ROF	BLT		X	X	X	X	X											
BUICK																						
ENCLAVE	P255/65R18 109S		151559248	FORTERA HL	BSL	X	X	X	X	X												
	P255/65R18 111S		755907383	ASSURANCE CS FUEL MAX	BSL						X	X	X	X								
	P255/60R19 108H		732587500	EAGLE RS-A	VSB	X	X	X	X	X												
LACROSSE	P235/50R18 97H		706018163	EAGLE LS-2	VSB		X	X	X													
	P245/45R19 98V		107172343	EAGLE RS-A2	VSB		X	X	X	X	X	X										
REGAL	P225/55R17 95H		738828571	ASSURANCE FUEL MAX	VSB						X	X	X									
CADILLAC																						
CT6	235/50R18 97V		109087366	EAGLE SPORT ALL-SEASON	VSB					X	X	X	X									
	265/45R18 101V		109098366	EAGLE SPORT ALL-SEASON	VSB					X	X											
	245/45R19 98V		102839387	EAGLE TOURING	VSB					X	X	X	X									
	245/40R20 95W		102850387	EAGLE TOURING	VSB					X	X	X	X									
	245/40R20 95Y		783390388	EAGLE F1 ASYMMETRIC 3	BLT							X	X									
CTS	P245/45R19 98V		107172343	EAGLE RS-A2	VSB	X	X															
XTS	P245/45R19 98V		107172343	EAGLE RS-A2	VSB	X	X	X	X	X	X	X										

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR									
							2013	2014	2015	2016	2017	2018	2019	2020	2021	
CHEVROLET																
	BOLT	205/55R16 91H		738524571	ASSURANCE FUEL MAX	VS					X	X	X	X		
	CAMARO	245/50R18 100V		109089366	EAGLE SPORT ALL-SEASON	VS			X	X	X	X	X	X		
	CAMARO 2LT	245/40R20 95V		104040390	EAGLE F1 ASYMMETRIC A/S ROF	VS			X	X	X	X	X	X		
	CAMARO SS	245/40ZR20 95Y	F	783390385	EAGLE F1 ASYMMETRIC 3 ROF	VS			X	X	X	X	X	X		
		275/35ZR20 98Y	R	783400385	EAGLE F1 ASYMMETRIC 3 ROF	VS			X	X	X	X	X	X		
	CAMARO SS 1LE / ZL1	285/30ZR20 95Y	F	797788523	EAGLE F1 SUPERCAR 3	BS				X	X	X	X	X		
		305/30ZR20 99Y	R	797789523	EAGLE F1 SUPERCAR 3	BS				X	X	X	X	X		
	CAMARO ZL1 1LE	305/30ZR19 98Y	F	797001538	EAGLE F1 SUPERCAR 3R	VS				X	X	X	X	X		
		325/30ZR19 101Y	R	797002538	EAGLE F1 SUPERCAR 3R	VS				X	X	X	X	X		
	CAPRICE POLICE	P235/50R18 99W XL		732276500	EAGLE RS-A POLICE	VS	X	X	X	X	X					
	COLORADO	265/70R16 112T		157045622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X			
		255/65R17 110T		157069622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X	X		
		255/65R17 110T		758069572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BS			X	X	X	X	X	X		
		265/65R17 112S		150153601	WRANGLER DURATRAC	BS				X	X	X	X	X		
		265/60R18 110T		157076622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X	X		
	CRUZE	205/55R16 89H		738524571	ASSURANCE FUEL MAX	VS			X	X	X	X	X			
	IMPALA	P245/45R19 98V		107172343	EAGLE RS-A2	VS		X	X	X	X	X	X			
	IMPALA POLICE	P235/55R17 98W		732297500	EAGLE RS-A POLICE	VS	X	X	X	X	X					
	MALIBU	P225/55R17 95H		738828571	ASSURANCE FUEL MAX	VS				X	X	X	X	X		
		P235/50R18 97H		706018163	EAGLE LS-2	VS	X	X	X	X	X					
	SILVERADO	P265/70R17 113S		410422176	WRANGLER AT/S	OW	X	X								
		265/65R18 114T		157068622	WRANGLER FORTITUDE HT	BS				X	X	X	X	X		
		265/65R18 114T		157179620	WRANGLER FORTITUDE HT	OW				X	X	X	X	X		
		LT275/65R18 113Q		312067142	WRANGLER DURATRAC	BS						X	X	X		
		265/65R18 114S		150644601	WRANGLER DURATRAC	OW			X	X	X	X				
		P275/55R20 111S		706069165	EAGLE LS-2	VS	X	X	X	X	X	X				
		P275/55R20 111S		183102217	WRANGLER SR-A	VS		X	X	X	X	X	X			
		275/60R20 115S		741178681	WRANGLER TRAILRUNNER AT	BS						X	X	X		
		LT265/60R20 110S		796265833	WRANGLER TERRITORY MT	BS								X		
	SILVERADO HD	LT265/70R17 121S		179696217	WRANGLER SR-A	BS	X	X	X	X	X	X	X			
		LT265/70R18 124S		179040436	WRANGLER SR-A	VS	X	X	X	X	X	X	X			
		LT275/65R18 123Q		312011142	WRANGLER DURATRAC	OW			X	X	X	X	X			
		LT265/60R20 121S		179020436	WRANGLER SR-A	VS	X	X	X	X	X	X	X			
		LT275/65R20 126S		742303681	WRANGLER TRAILRUNNER AT	BS						X	X	X		
	SPARK	185/55R15 82T		402602047	INTEGRITY	VS	X	X	X	X	X					
	TAHOE	265/65R18 114T		157068622	WRANGLER FORTITUDE HT	BS				X	X	X	X			
		265/65R18 114S		150644601	WRANGLER DURATRAC	BS			X	X	X	X	X			
	TAHOE Z71	275/60R20 115S		741178681	WRANGLER TRAILRUNNER AT	BS								X		
	SUBURBAN	265/65R18 114T		157068622	WRANGLER FORTITUDE HT	BS				X	X	X	X			

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR							
							2013	2014	2015	2016	2017	2018	2019	2020
CHEVROLET (Cont.)														
	TAHOE POLICE	P265/60R17 108V		732523500	EAGLE RS-A POLICE	VSB					X	X	X	X
	TRAVERSE	P255/65R18 109S		151559248	FORTERA HL	BSL	X	X	X	X	X			
		P255/65R18 111S		755907383	ASSURANCE CS FUEL MAX	BSL						X	X	X
CHRYSLER														
	300	245/45ZR20 99Y		389926128	EAGLE F1 SUPERCAR	VSB	X	X	X	X	X	X	X	X
		245/45ZR20 99Y		107548343	EAGLE RS-A2	VSB	X	X	X	X	X	X	X	X
DODGE														
	CHALLENGER SRT8	245/45ZR20 99Y		107548343	EAGLE RS-A2	VSB		X	X	X	X	X	X	X
		245/45ZR20 99Y		389926128	EAGLE F1 SUPERCAR	VSB	X	X	X	X	X	X	X	X
	CHARGER	245/45ZR20 99Y		389926128	EAGLE F1 SUPERCAR	VSB	X	X	X	X	X	X	X	X
		245/45ZR20 99Y		107548343	EAGLE RS-A2	VSB		X	X	X	X	X	X	X
	CHARGER POLICE	P225/60R18 99W		732312500	EAGLE RS-A POLICE	VSB	X	X						
	CHARGER PURSUIT	P225/60R18 99W		732312500	EAGLE RS-A POLICE	VSB				X	X	X	X	X
		245/55R18 103V		732026500	EAGLE RS-A POLICE	VSB			X	X	X	X	X	X
	DURANGO	265/50R20 107T		151093203	FORTERA HL	VSB	X	X	X					
FORD														
	BRONCO	LT285/70R17 116S		796285833	WRANGLER TERRITORY MT	BSL								X
		LT315/70R17 113S		796270833	WRANGLER TERRITORY MT	BSL								
	F-150	LT245/70R17 119S		748120572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW				X	X	X	X	X
		265/70R17 115T		157042620	WRANGLER FORTITUDE HT	OWL			X	X	X	X	X	X
		LT275/65R18 113S		411958176	WRANGLER AT/S	OWL	X	X						
		LT275/65R18 113S		748958571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OWL		X	X	X	X	X	X	X
		275/65R18 116T		157081620	WRANGLER FORTITUDE HT	OWL					X	X	X	
		275/65R18 116T		734001586	WRANGLER TERRITORY AT	OWL							X	X
		275/55R20 113T		758065571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OWL			X	X	X	X	X	X
		275/60R20 115T		827010815	WRANGLER TERRITORY HT	VSB								X
		F-150 SSV (POLICE)	LT265/70R18 113H		108028861	WRANGLER ENFORCER AT	BSL							
	FLEX	P235/60R18 102T		413215507	ASSURANCE COMFORTRED	VSB	X	X	X	X	X	X		
	FOCUS ST	235/40R18 95Y XL		784764348	EAGLE F1 ASYMMETRIC 2	VSB	X	X	X	X	X			
	FUSION	215/60R16 95H		738704571	ASSURANCE FUEL MAX	VSB	X	X	X	X	X	X	X	
		235/45R18 94V		706038163	EAGLE LS-2	VSB	X	X	X	X	X	X	X	X
	FUSION SPORT	235/40R19 96W XL		104504357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB				X	X	X	X	
	MUSTANG	235/50R18 97W		104207357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB			X	X	X	X	X	X
		265/35R20 99W XL		104436357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB					X	X	X	X
	POLICE INTERCEPTOR SEDAN	245/55R18 103V		732026500	EAGLE RS-A POLICE	VSB	X	X	X	X	X	X		
	POLICE INTERCEPTOR UTILITY	245/55R18 103V		732026500	EAGLE RS-A POLICE	VSB	X	X	X	X	X	X		
		255/60R18 108V		732005563	EAGLE ENFORCER	VSB								X

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR									
							2013	2014	2015	2016	2017	2018	2019	2020	2021	
FORD (Cont.)																
	POLICE RESPONDER HYBRID	235/50R17 96W		109064366	EAGLE SPORT ALL-SEASON	VS							X	X		
	SUPERDUTY (F-250/350)	LT275/70R18 125/122R		748139686	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BS					X	X	X	X	X	
		LT275/70R18 125/122R		748139571	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	OW					X	X	X	X	X	
		LT285/75R18 129Q		312084142	WRANGLER DURATRAC	BS								X	X	
	TAURUS	255/45R19 100V		732016500	EAGLE RS-A	VS	X	X	X	X	X	X	X			
	TAURUS SHO	245/45ZR20 99Y		389926128	EAGLE F1 SUPERCAR	VS	X	X	X	X						
GMC																
	ACADIA	P255/65R18 109S		151559248	FORTERA HL	BS	X	X	X	X	X					
		P255/60R19 108H		732587500	EAGLE RS-A	VS	X	X	X	X	X					
	CANYON	265/70R16 112T		157045622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X	X		
		255/65R17 110T		157069622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X	X	X	
		255/65R17 110T		758069572	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BS			X	X	X	X	X	X	X	
		265/65R17 112S		150153601	WRANGLER DURATRAC	BS					X	X	X	X	X	
		265/60R18 110T		157076622	WRANGLER FORTITUDE HT	BS			X	X	X	X	X	X	X	
		SIERRA	P265/70R17 113S		410422176	WRANGLER AT/S	OW	X	X							
	265/65R18 114T			157068622	WRANGLER FORTITUDE HT	BS					X	X	X	X	X	
	265/65R18 114T			157179620	WRANGLER FORTITUDE HT	OW					X	X	X	X	X	
	LT275/65R18 113Q			312067142	WRANGLER DURATRAC	BS							X	X	X	
	265/65R18 114S			150644601	WRANGLER DURATRAC	OW			X	X	X	X	X			
	P275/55R20 111S			706069165	EAGLE LS-2	VS	X	X	X	X	X	X				
	P275/55R20 111S			183102217	WRANGLER SR-A	VS		X	X	X	X	X	X			
	275/60R20 115S			741178681	WRANGLER TRAILRUNNER AT	BS							X	X	X	
	SIERRA AT4	LT265/60R20 110S		796265833	WRANGLER TERRITORY MT	BS								X		
	SIERRA HD	LT265/70R17 121S		179696217	WRANGLER SR-A	BS	X	X	X	X	X	X	X			
		LT265/70R18 124S		179040436	WRANGLER SR-A	VS	X	X	X	X	X	X	X			
		LT275/65R18 123Q		312011142	WRANGLER DURATRAC	OW			X	X	X	X	X			
		LT265/60R20 121S		179020436	WRANGLER SR-A	VS	X	X	X	X	X	X	X			
		LT275/65R20 126S		742303681	WRANGLER TRAILRUNNER AT	BS							X	X	X	
	YUKON	265/65R18 114T		157068622	WRANGLER FORTITUDE HT	BS					X	X	X	X		
		265/65R18 114S		150644601	WRANGLER DURATRAC	BS			X	X	X	X	X	X		
	YUKON AT4	275/60R20 115S		741178681	WRANGLER TRAILRUNNER AT	BS								X		
	YUKON XL	265/65R18 114T		157068622	WRANGLER FORTITUDE HT	BS					X	X	X	X		
HONDA																
	ACCORD	235/45R18 94V		706038163	EAGLE LS-2	VS	X	X	X	X	X					
		235/40R19 96W XL		102918387	EAGLE TOURING	VS						X	X	X	X	
	CIVIC	P205/55R16 89H		732170500	EAGLE RS-A	VS	X	X	X							
		235/40R18 95Y XL		784764348	EAGLE F1 ASYMMETRIC 2	BS					X	X	X	X		
		235/40R18 91W		109104366	EAGLE SPORT ALL-SEASON	BS					X	X	X	X	X	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR								
							2013	2014	2015	2016	2017	2018	2019	2020	2021
HYUNDAI															
	ELANTRA N LINE	235/40R18 95Y XL		784764348	EAGLE F1 ASYMMETRIC 2	BSW								X	
	KONA	235/45R18 98V XL		102964559	EAGLE TOURING	BLT					X	X	X	X	
	SONATA	205/65R16 95H		738002571	ASSURANCE FUEL MAX	VSB							X	X	
	SONATA HYBRID	205/65R16 95H		738003571	ASSURANCE FUEL MAX	VSB							X	X	
INFINITI															
	FX35	P265/50R20 106V		732278500	EAGLE RS-A	VSB	X	X							
	FX45	P265/50R20 106V		732278500	EAGLE RS-A	VSB	X	X							
	G25	P225/55R17 95V		732941500	EAGLE RS-A	VSB	X	X	X	X	X				
JAGUAR															
	E-PACE	235/65R17 108V XL		784037398	EAGLE F1 ASYMMETRIC SUV AT	BLT					X	X	X		
		245/45R21 104W XL		784039398	EAGLE F1 ASYMMETRIC SUV AT	BLT				X	X	X			
	F-PACE	255/60R18 112W XL		784500398	EAGLE F1 ASYMMETRIC SUV AT	BLT			X	X	X	X			
		255/50R20 109W XL		784154398	EAGLE F1 ASYMMETRIC SUV AT	BLT			X	X	X	X			
	I-PACE	245/50R20 105V XL		109142557	EAGLE SPORT ALL-SEASON	BLT					X	X	X		
	XF	245/45R18 100H XL		109093382	EAGLE SPORT ALL-SEASON	BLT			X	X	X	X	X		
		245/40R19 98Y XL		783787388	EAGLE F1 ASYMMETRIC 3	BLT			X	X	X				
		255/35R20 97Y XL		783363388	EAGLE F1 ASYMMETRIC 3	BLT			X	X	X				
JEEP															
	GRAND CHEROKEE	P245/70R17 108T		151056203	FORTERA HL	VSB	X	X	X	X	X	X	X	X	
		265/60R18 110T		758076630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	VSB				X	X	X	X	X	
		265/50R20 107T		151093203	FORTERA HL	VSB	X	X	X	X	X				
		265/50R20 107T		758124630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	VSB				X	X	X	X	X	
	PATRIOT	P205/70R16 96T		706611163	EAGLE LS-2	VSB	X	X	X	X	X				
	RENEGADE	225/55R18 98V		109086382	EAGLE SPORT ALL-SEASON	BLT			X	X	X	X	X	X	
		235/45R19 95H		706377575	EAGLE LS-2 ROF	BLT						X	X	X	
	WRANGLER	P225/75R16 104S		773017415	WRANGLER ST	VSB	X	X	X	X					
		245/75R17 112T		758177707	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW						X	X	X	
		P255/75R17 113S		183107418	WRANGLER SR-A	OWL	X	X	X	X	X				
		255/70R18 113T		758074707	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW						X	X	X	
KARMA															
	REVERO	255/35R22 99W XL	F	389357128	EAGLE F1 SUPERCAR	VSB					X				
		285/35R22 102W	R	389398128	EAGLE F1 SUPERCAR	VSB					X				
		255/35R22 99W XL	F	389357001	EAGLE F1 SUPERCAR SCT	VSB						X	X	X	
		285/35R22 102W	R	389398001	EAGLE F1 SUPERCAR SCT	VSB						X	X	X	
KIA															
	SOUL	235/45R18 98V XL		102964559	EAGLE TOURING	BLT							X	X	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR								
							2013	2014	2015	2016	2017	2018	2019	2020	2021
LAND ROVER															
DEFENDER		255/70R18 116H XL		758260845	WRANGLER ALL-TERRAIN ADVENTURE	BLT							X	X	
		255/70R18 116Q XL		150014574	WRANGLER DURATRAC	BLT							X	X	
		255/65R19 114H XL		758263845	WRANGLER ALL-TERRAIN ADVENTURE	BLT							X	X	
		255/65R19 114Q XL		150012574	WRANGLER DURATRAC	BLT							X	X	
		255/60R20 113H XL		758264845	WRANGLER ALL-TERRAIN ADVENTURE	BLT							X	X	
		255/60R20 113Q XL		150013574	WRANGLER DURATRAC	BLT							X	X	
DISCOVERY		255/55R20 110W XL		784074333	EAGLE F1 ASYMMETRIC SUV AT	BLT				X	X	X	X		
		255/55R20 110Q XL		150009601	WRANGLER DURATRAC	BLT					X	X	X	X	
DISCOVERY SPORT		235/65R17 108V XL		784037398	EAGLE F1 ASYMMETRIC SUV AT	BLT						X	X	X	
		235/60R18 107V XL		784038398	EAGLE F1 ASYMMETRIC SUV AT	BLT						X	X	X	
		235/50R20 104W XL		784135398	EAGLE F1 ASYMMETRIC SUV AT SCT	BLT						X	X	X	
RANGE ROVER		255/55R20 110W XL		784074333	EAGLE F1 ASYMMETRIC SUV AT	BLT	X	X	X	X	X	X	X	X	
		255/55R20 110Q XL		150009601	WRANGLER DURATRAC	BLT					X	X	X	X	
		275/45R21 110W XL		784072333	EAGLE F1 ASYMMETRIC SUV AT	BLT	X	X	X	X	X	X			
RANGE ROVER EVOQUE		235/65R17 108V XL		784037398	EAGLE F1 ASYMMETRIC SUV AT	BLT						X	X	X	
		235/60R18 107V XL		784038398	EAGLE F1 ASYMMETRIC SUV AT	BLT						X	X	X	
		235/50R20 104W XL		784135398	EAGLE F1 ASYMMETRIC SUV AT SCT	BLT						X	X	X	
RANGE ROVER SPORT		255/55R20 110Y XL		784389333	EAGLE F1 ASYMMETRIC SUV	BLT	X	X	X	X	X	X			
		255/55R20 110Q XL		150009601	WRANGLER DURATRAC	BLT					X	X	X	X	
RANGE ROVER VELAR		255/60R18 112W XL		784500398	EAGLE F1 ASYMMETRIC SUV AT	BLT				X	X	X			
		255/50R20 109W XL		784154398	EAGLE F1 ASYMMETRIC SUV AT	BLT				X	X	X			
LINCOLN															
CONTINENTAL		235/50R18 97W		104207357	EAGLE F1 ASYMMETRIC ALL-SEASON	VSB					X	X	X	X	
		245/40R20 99W XL		104433393	EAGLE F1 ASYMMETRIC ALL-SEASON SCT	VSB					X	X	X		
		245/40R20 99W XL		102003387	EAGLE TOURING SCT	VSB							X	X	
AVIATOR		275/40R22 107W XL		102994396	EAGLE TOURING SCT	VSB							X	X	
MKT		255/45R20 101V		732007741	EAGLE RS-A	VSB	X	X	X	X	X	X	X		
MKT LIMO		255/55R18 109H XL		706999308	EAGLE LS-2	VSB	X	X	X	X	X	X			
MAHINDRA															
ROXOR		235/70R16 106T		741043680	WRANGLER TRAILRUNNER AT	OWL						X	X	X	
		LT265/75R16 112Q		312018027	WRANGLER DURATRAC	OWL							X	X	
MASERATI															
LEVANTE		255/60R18 108W		109106399	EAGLE SPORT ALL-SEASON	BLT					X	X	X	X	
		265/50R19 110W XL		109146399	EAGLE SPORT ALL-SEASON	BLT					X	X	X	X	
		265/50R19 110Y XL		784247560	EAGLE F1 ASYMMETRIC 2 SUV	BLT					X	X	X		
		265/45R20 108Y XL		784741348	EAGLE F1 ASYMMETRIC 2 SUV	BLT					X	X	X	X	

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR															
							2013	2014	2015	2016	2017	2018	2019	2020	2021							
MERCEDES-BENZ																						
C-CLASS	225/40R19 93Y XL	F	784182359	EAGLE F1 ASYMMETRIC 2 ROF	BLT			X	X	X	X	X	X	X								
	245/35R19 93Y XL	R	784140359	EAGLE F1 ASYMMETRIC 2 ROF	BLT			X	X	X	X	X	X	X								
CLA-CLASS	225/40R18 92W XL		784806359	EAGLE F1 ASYMMETRIC 2 ROF	BLT					X	X	X										
GLC-CLASS	255/45R20 105V XL	F	109101395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X	X	X	X	X								
	285/40R20 108V XL	R	109102395	EAGLE SPORT ALL-SEASON ROF	BLT				X	X	X	X	X	X								
CLS-CLASS	245/45R18 100Y XL		783005385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
	245/40R19 98Y XL	F	783836385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
	275/35R19 100Y XL	R	783857385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
	245/35R20 95Y XL	F	783718394	EAGLE F1 ASYMMETRIC 3 ROF SCT	BLT							X	X	X								
	275/30R20 97Y XL	R	783723385	EAGLE F1 ASYMMETRIC 3 ROF	BLT							X	X	X								
E-CLASS	225/55R17 97H		109143395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X								
	245/45R17 95H		706578322	EAGLE LS-2 ROF	BLT	X	X	X	X													
	245/45R18 100H XL		109093395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X								
	245/45R18 100Y XL		783005385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
	245/40R19 98H XL		109140395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X								
	245/40R19 98Y XL	F	783836394	EAGLE F1 ASYMMETRIC 3 ROF SCT	BLT						X	X	X	X								
	275/35R19 100Y XL	R	783857385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
	245/35R20 95Y XL	F	783718394	EAGLE F1 ASYMMETRIC 3 ROF SCT	BLT						X	X	X	X								
	275/30R20 97Y XL	R	783723385	EAGLE F1 ASYMMETRIC 3 ROF	BLT					X	X	X	X	X								
GL/GLS-Class	275/50R20 109H		706794163	EAGLE LS-2 ROF	VSB	X	X	X	X	X	X											
G63	295/40R22 112W XL		784102562	EAGLE F1 ASYMMETRIC SUV	BLT							X	X	X								
ML/GLE-CLASS	255/50R19 103W		784287347	EAGLE F1 ASYMMETRIC SUV	VSB	X	X	X	X	X	X											
S-CLASS	245/40R20 99Y XL	F	784117359	EAGLE F1 ASYMMETRIC 2 ROF	BLT		X	X	X	X	X	X	X									
	275/35R20 102Y XL	R	784118359	EAGLE F1 ASYMMETRIC 2 ROF	BLT		X	X	X	X	X	X	X									
S-CLASS MAYBACH	245/40R20 99Y XL	F	784117392	EAGLE F1 ASYMMETRIC 2 ROF SCT	BLT				X	X	X	X	X									
	275/35R20 102Y XL	R	784118392	EAGLE F1 ASYMMETRIC 2 ROF SCT	BLT				X	X	X	X	X									
MINI																						
COUNTRYMAN	225/55R17 97W		112073534	EFFICIENTGRIP PERFORMANCE								X	X	X	X							
	225/50R18 95V		109092395	EAGLE SPORT ALL-SEASON ROF	BLT					X	X	X	X	X								
	225/50R18 95W		783115385	EAGLE F1 ASYMMETRIC 3 ROF	BLT						X	X	X	X								
	225/45R19 96W		783153385	EAGLE F1 ASYMMETRIC 3 ROF							X	X	X	X								
COOPER EV	205/45R17 88W		783152388	EAGLE F1 ASYMMETRIC 3	BLT								X	X								
	205/45R17 88W		783100385	EAGLE F1 ASYMMETRIC 3 ROF	BLT								X	X								
	205/40R18 86W		783149385	EAGLE F1 ASYMMETRIC 3 ROF	BLT								X	X								

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR									
							2013	2014	2015	2016	2017	2018	2019	2020	2021	
NISSAN																
NISSAN	JUKE	P215/55R17 93V		732262500	EAGLE RS-A	VS	X	X	X	X	X					
	MAXIMA	P245/45R18 96V		732279438	EAGLE RS-A	VS	X	X	X							
		245/40R19 94W		104388357	EAGLE F1 ASYMMETRIC ALL-SEASON	VS				X	X	X	X	X		
		245/40R19 94W		102972396	EAGLE TOURING SCT	VS						X	X	X		
	ROGUE	225/65R17 102H		755667383	ASSURANCE CS FUEL MAX	VS		X	X	X	X	X	X	X		
	TITAN	P275/60R20 114S		183934436	WRANGLER SR-A	VS	X	X	X	X	X	X	X	X		
PORSCHE																
PORSCHE	911	235/40ZR19 92Y	F	784045348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X	X	X	X				
		295/35ZR19 100Y	R	784093348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X	X	X	X				
		285/35ZR19 103Y XL	R	784048348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X	X	X	X				
		245/35ZR20 95Y XL	F	783125388	EAGLE F1 ASYMMETRIC 3	BL							X	X	X	
		305/30ZR21 104Y XL	R	783126388	EAGLE F1 ASYMMETRIC 3	BL							X	X	X	
	911 TURBO	255/35ZR20 97Y	F	112072591	EAGLE F1 SUPERSPORT	BL								X	X	
		315/30ZR21 105Y	R	112071591	EAGLE F1 SUPERSPORT	BL								X	X	
	BOXSTER / CAYMAN	235/45ZR18 94Y	F	784055348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X	X	X	X	X	X	X	
		265/45ZR18 101Y	R	784066348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X	X	X	X	X	X	X	
		235/40ZR19 92Y	F	784045348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X							
		265/40ZR19 98Y	R	784067348	EAGLE F1 ASYMMETRIC 2	BL	X	X	X							
		235/35ZR20 88Y	F	784194348	EAGLE F1 ASYMMETRIC 2	BL			X	X	X	X	X			
		265/35ZR20 95Y	R	784204348	EAGLE F1 ASYMMETRIC 2	BL			X	X	X	X	X			
	CAYENNE	255/55R18 109V XL		706939308	EAGLE LS-2	BL	X	X	X							
		265/50R19 110V XL		706215308	EAGLE LS-2	BL	X	X	X	X	X	X				
	MACAN	235/55R19 101 V	F	706414308	EAGLE LS-2	BL				X	X	X	X			
		255/50R19 103 V	R	706422308	EAGLE LS-2	BL				X	X	X	X			
		235/55R19 101 Y	F	784437348	EAGLE F1 ASYMMETRIC 2	BL				X	X	X				
		255/50R19 103Y	R	784439348	EAGLE F1 ASYMMETRIC 2	BL				X	X	X				
		265/45R20 104Y	F	783119544	EAGLE F1 ASYMMETRIC 3 SUV	BL							X	X	X	
		295/40R20 106Y	R	783123544	EAGLE F1 ASYMMETRIC 3 SUV	BL							X	X	X	
		265/45R20 104V	F	102011387	EAGLE TOURING	BL							X	X	X	
		295/40R20 106V	R	102012387	EAGLE TOURING	BL							X	X	X	
	PANAMERA	265/45ZR19 105Y XL	F	783859388	EAGLE F1 ASYMMETRIC 3	BL					X	X	X			
		295/40ZR19 108Y XL	R	783917388	EAGLE F1 ASYMMETRIC 3	BL					X	X	X			
	TAYCAN	225/55R19 103H XL	F	102020559	EAGLE TOURING	BL								X	X	
		275/45R19 108H XL	R	102021559	EAGLE TOURING	BL								X	X	
		265/35ZR21 101Y XL	F	783146388	EAGLE F1 ASYMMETRIC 3	BL								X	X	
		305/30ZR21 104Y XL	R	783142388	EAGLE F1 ASYMMETRIC 3	BL								X	X	
	RAM															
RAM	1500	P265/70R17 113R		183106418	WRANGLER SR-A	OWL	X	X	X	X	X	X	X	X		
		P265/70R17 113R		183106436	WRANGLER SR-A	VS	X	X	X	X	X	X	X	X		
		P265/70R17 113S		403422171	WRANGLER HP	VS	X	X	X	X	X	X	X	X		
		LT265/70R17 121R		748535189	WRANGLER SILENT ARMOR PRO-GRADE	OWL	X	X	X	X	X	X				

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR								
							2013	2014	2015	2016	2017	2018	2019	2020	2021
RAM (Cont.)															
1500 (Cont.)		275/65R18 116T		157066708	WRANGLER FORTITUDE HT	VSB						X	X	X	X
		P275/60R20 114S		183934492	WRANGLER SR-A	OWL	X	X	X	X	X	X	X	X	X
		P275/60R20 114S		183934470	WRANGLER SR-A	VSB	X	X	X	X	X	X	X	X	X
		285/45R22 114H XL		151621163	FORTERA SL	VSB	X	X	X	X	X				
		285/45R22 114H XL		102863387	EAGLE TOURING	VSB						X	X	X	X
1500 REBEL		LT275/70R18 125R		312065027	WRANGLER DURATRAC	OWL					X	X	X	X	
1500 TRX		LT325/65R18 121T		733259838	WRANGLER TERRITORY AT	BSL								X	
2500 POWER WAGON		LT285/70R17 121Q		312015027	WRANGLER DURATRAC	OWL	X	X	X	X	X	X	X	X	
ROLLS-ROYCE															
GHOST		255/50R19 107Y		103007595	EAGLE F1 ASYMMETRIC 5 SEALTECH	BLT									X
		255/45R20 101Y	F	112126344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X	X	X	X	
		285/40R20 104Y	R	112185344	EFFICIENTGRIP ROF	BLT	X	X	X	X	X	X	X	X	
PHANTOM		255/50R21 106W	F	797010272	EAGLE NCT5 EMT	VSB	X	X	X	X	X				
		285/45R21 109W	R	797652272	EAGLE NCT5 EMT	VSB	X	X	X	X	X				
SCION															
iQ		175/60R16 82H		738529571	ASSURANCE FUEL MAX	VSB	X	X	X						
XB		P205/55R16 89H		732674500	EAGLE RS-A	VSB	X	X	X						
SUBARU															
LEGACY		225/55R17 97V		738754571	ASSURANCE FUEL MAX	BSW			X	X	X	X	X		
		225/50R18 95H		706171163	EAGLE LS-2	BSW			X	X	X	X	X		
TESLA															
MODEL S		P245/45R19 98V		107172343	EAGLE RS-A2	VSB	X	X	X	X					
		245/45R19 98W		102851396	EAGLE TOURING SCT	VSB				X	X	X	X	X	
		245/45R19 98W		102015578	EAGLE TOURING SCT	VSB							X	X	X
MODEL X		265/35R22 102W XL	F	783407394	EAGLE F1 ASYMMETRIC 3 SCT	BLT				X	X	X	X	X	
		285/35R22 106W XL	R	783411394	EAGLE F1 ASYMMETRIC 3 SCT	BLT				X	X	X	X	X	
MODEL Y		255/40R20 101W XL		103002589	EAGLE F1 ASYMMETRIC 5 SCT (A/S)	SBL								X	
TOYOTA															
COROLLA		P195/65R15 89S		706648163	EAGLE LS-2	VSB	X								
		P205/55R16 89H		732674500	EAGLE RS-A	VSB	X	X	X	X					
		P215/45R17 87W		732682500	EAGLE RS-A	VSB	X								
HIGHLANDER		235/55R20 102V		102928387	EAGLE TOURING	VSB							X	X	
MATRIX		P205/55R16 89H		732674500	EAGLE RS-A	VSB	X								
		P215/45R17 87W		732682500	EAGLE RS-A	VSB	X								
PRIUS C		P175/65R15 84H		738609571	ASSURANCE FUEL MAX	VSB	X	X	X	X	X	X			
PRIUS / PRIUS PLUG-IN		P195/65R15 89S		738289571	ASSURANCE FUEL MAX	VSB	X	X	X	X					
SIENNA		235/55R18 100V		732222500	EAGLE RS-A	VSB	X	X	X	X	X	X	X		
TACOMA		265/70R16 112T		758045630	WRANGLER ALL-TERRAIN ADVENTURE W/ KEVLAR	BSW				X	X	X	X		
VENZA		P245/50R20 102H		732899500	EAGLE RS-A	VSB	X	X	X						
YARIS		P175/65R15 84H		738609571	ASSURANCE FUEL MAX	VSB	X	X	X	X	X				

For more complete information, go to Tire-HQ™ at www.tire-hq.com.



VEHICLE MAKE	VEHICLE MODEL	TIRE SIZE SERVICE DESCR.	FRONT/ REAR	PRODUCT CODE	TIRE LINE	SIDEWALL DESCRIPTION	VEHICLE MODEL YEAR								
							2013	2014	2015	2016	2017	2018	2019	2020	2021
VOLKSWAGEN															
	ATLAS / ATLAS CROSS SPORT	245/60R18 105T		681819566	ASSURANCE FINESSE	VS							X	X	
		255/50R20 105T		681004566	ASSURANCE FINESSE	VS							X	X	
	TAOS	215/55R17 94H		681213566	ASSURANCE FINESSE	VS								22MY	
		225/55R17 97H		681028566	ASSURANCE FINESSE	VS								22MY	
		215/50R18 92H		681030566	ASSURANCE FINESSE	VS								22MY	
	TIGUAN	215/65R17 99H		681875566	ASSURANCE FINESSE	VS						X	X	X	
		235/55R18 100H		681800566	ASSURANCE FINESSE	VS						X	X	X	
	TOUAREG	255/55R18 109H XL		706999308	EAGLE LS-2	VS	X	X	X						

For more complete information, go to Tire-HQ™ at www.tire-hq.com.

TIRE FUNDAMENTALS

TIRE FUNDAMENTALS



TIRE CONSTRUCTION

APEX: Rubber components that provide a transition from the bead area to the sidewall and add support for a balanced ride and enhanced handling.



BEAD: A round hoop of steel wires, wrapped or reinforced by steel cords, placed at the very inside of the tire's diameter to hold the tire onto the wheel rim.



BELTS: One or more rubber-coated plies (layers) of steel running circumferentially around the tire under the tread. They are designed to reinforce body plies, hold the tread flat on the road and resist damage from impacts and penetration. Belts also determine the tire's diameter and resist deformation and squirm from cornering, braking and centrifugal forces – which increases the tread life.

CHAFER: Abrasion-resistant rubber-coated material to help prevent the tire's beads from rim damage and chafing.

LINER OR INNER-LINER: A thin layer of rubber inside a tubeless tire that helps maintain inflation pressure in the tire.

PLIES: The reinforcing members of a tire composed of layers of cord fabric and rubber that provide the strength to contain the air pressure needed to support a load and resist deflection.



PLY: A rubber-coated layer of fabric containing cords that run parallel to each other; extends from bead to bead and goes between the inner-liner and belts of tread.

SIDEWALL: The portion of the tire between the bead and the tread. It is flexible to soak up bumps, yet stiff to limit tire rollover.



TIRE CONSTRUCTION: Term used to describe a variety of integral parts of a modern radial or bias tire.

Example tire cutaway drawing shown below. Please note: Not all tires have the same components.



TREAD DESIGN

ALL-SEASON TIRES: Tires designed to provide good traction in a wide variety of road conditions, including wet, dry, mud and snow.

ASYMMETRICAL TREAD DESIGN: The design of the tread pattern changes from one side of the tread face to the other, in order to have two or more different types of tread patterns on one tire with an intended outboard side.



DIRECTIONAL TREAD DESIGN: A tire designed to rotate in only one direction to enhance water evacuation from the contact patch.

GROOVE: The space between two adjacent tread ribs; also called tread grooves.



NON-DIRECTIONAL TREAD DESIGN: A tire designed to rotate in either direction without loss in performance.

SIPES: Small, narrow slots molded into the ribs of the tread design that increase the traction edges of the tire and increase ability of the tire on wet pavement.

SYMMETRICAL TREAD DESIGN: The tread pattern is consistent in size and shape both circumferentially around the tire and laterally across the face of the tread.

TREAD PATTERN: The arrangement of blocks, grooves, sipes and channels designed into the tread to enhance its grip. Also called the tread design.

WINTER TIRES (aka snow tires): A winter tire is a tire with a tread design and compound made specifically for snowy and icy conditions. Identified by M&S, M+S or M/S markings on the sidewalls. Tires designed for use in severe snow conditions are further identified with a pictograph of a mountain with a snowflake on the sidewalls and must meet specific snow performance test requirements.



WEAR INDICATOR: Narrow bands, sometimes called "wear bars," that appear across the tread when 2/32" of tread is remaining.

DOT NUMBER: The D.O.T. number is a code that one can find on the sidewall of all over-the-highway tires signifying the fact that the tire complies with the U.S. Department of Transportation motor vehicle safety standards. The code identifies the manufacturer, manufacturing plant, tire size, tire type and the week and year of manufacture. For example, the date code 4018 would indicate 40th week of 2018.

LOAD CARRYING CAPACITY: The load a particular size tire can carry at a given inflation pressure under certain driving conditions, as established by the Tire and Rim Association or other standards organization.

LOAD RANGE: Tire load ranges are indicated as STANDARD LOAD (SL) and EXTRA LOAD (XL) for auto tires and Load Range C, D, E, etc., for light truck tires. The load range represents the carrying capacity of the tire at specific tire inflation pressures.

M+S, M/S OR M & S: A tire sidewall designation indicating that the tire meets the RMA definition of a mud and snow tire.

SIDEWALL EXPLANATION

B01 = Broken Serrated Band	NW = Narrow White Stripe
B02 = Broken Serrated Band – EMT	OWL = Outlined White Letters
BLK = Blackwall	RWL = Raised White Letters
BLT = Black Letters	SBL = Serrated Black Letters
BSL = Black Serrated Letters	VSB = Vertical Serrated Band
BSW = Black Sidewall	XNW = Extra Narrow White Stripe

UTQG LEGEND

Tire Grades: Uniform Tire Quality Grading System or UTQG

Except for winter, light truck and trailer tires, the Department of Transportation requires tire manufacturers to grade passenger car tires based on three performance factors: treadwear, traction and temperature resistance. The UTQG rating of each Goodyear tire is listed in this catalog.

Treadwear

- More than 100 – Better
- 100 – Baseline
- Less than 100 – Poorer

The treadwear grade is a comparative rating based on the wear rate of the tire when tested for 7,200 miles on a government-specified course. A tire graded 200 would wear twice as long on the government-specified course as one graded 100. (Actual tire mileage may vary.) Note: Treadwear grade is valid only for comparisons within a manufacturer's product line, not between manufacturers. For example, a 700 rating from one tire manufacturer is not necessarily better than a 600 from another.

Traction

- | | |
|------|-----|
| • AA | • B |
| • A | • C |

Traction grades, from highest to lowest, are AA, A, B and C. They represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. The traction grades are based upon "straight ahead" braking tests. They do not indicate cornering ability or resistance to hydroplaning.

Temperature

- A – Best
- B – Intermediate
- C – Acceptable

Temperature grades represent the tire's resistance to heat generated by running at high speed. Sustained high temperatures can cause the materials of the tire to degenerate and thus reduce tire life. Excessive temperatures can lead to tire failure. Federal Motor Vehicle Safety Standards require that all passenger tires meet at least the minimal level of performance: Grade C.

TIRE SIZE

ASPECT RATIO: A term that describes a tire's height-to-width proportion. If a tire's sidewall height were 65% of its cross-section width, its aspect ratio would be 65. In the tire size expressed as 205/65R15, the number 65 is the aspect ratio. The lower the aspect ratio, the wider the tread and the shorter the sidewall.

HIGH FLOATATION TIRES: These light truck tires are for supporting a load on soft, yielding terrain. Size nomenclature includes outside diameter, section width, construction type, and rim diameter (e.g., 31X10.50R15LT).

LT-METRIC: A sizing system using the section width in millimeters, aspect ratio, type of construction, and rim diameter in inches (e.g., LT235/85R16) and is primarily intended for service on light trucks.

P-METRIC: A tire with a "P" preceding the size designation identifies that it is primarily intended for service on passenger cars (e.g., P225/45R17).

RIM DIAMETER: The diameter of the rim bead seats that support a tire normally indicated in whole numbers in inches for passenger cars.

SECTION WIDTH: The distance between a tire's sidewalls measured at the widest part of the tire not including the lettering or design.



SERVICE DESCRIPTION: (Load Index/Speed Symbol) A speed rating system which describes the load capacity and high speed of a tire; includes numerical load indexes and alphabetical speed symbols.

SPEED RATINGS*

Speed ratings are indicated as follows:

Speed Symbol	Maximum Speed	Open-Ended Speed Category
L	120 km/h (75 mph)	
M	130 km/h (81 mph)	
N	140 km/h (87 mph)	
P	150 km/h (93 mph)	
Q	160 km/h (99 mph)	
R	170 km/h (106 mph)	
S	180 km/h (112 mph)	
T	190 km/h (118 mph)	
U	200 km/h (124 mph)	
H	210 km/h (130 mph)	
V	240 km/h (149 mph)	
W	270 km/h (168 mph)	ZR**
Y	300 km/h (186 mph)	
(Y)**	Above 300 km/h (186 mph)	

*The Goodyear Tire & Rubber Company does not recommend the use of any of its products in excess of the legal speed limits.

**Per the T&RA 2020 yearbook, for tires having a maximum speed capability above 240 kph (149 mph), a "ZR" may appear in the size designation. For tires having a maximum speed capability above 300 kph (186 mph), a "ZR" must appear in the size designation and a Service Description, including the Y Speed Symbol, must be included in brackets.

Many Goodyear tires are available in speed-rated versions to match the speed capabilities of the world's fastest cars. Generally, it is recommended that a speed-rated tire be replaced with a tire having an equivalent or greater speed rating.

However, if you never drive at speeds near the limits of your speed-rated tires, you may choose to replace them with tires having a lesser top-speed rating.

In situations where tires having different top-speed ratings are mixed on a vehicle, the maximum speed certification is limited to the top-speed certification of the tire with the lowest speed rating.

Speed ratings do not indicate how well a tire handles or corners. They only certify a tire's ability to withstand high speed.

WARNING: Vehicle handling, traction, ride comfort and other performance parameters may be significantly affected by a change in tire size or type. Before replacing tires, always consult and follow the vehicle owner's manual because some vehicle manufacturers prohibit changing tire size. When selecting tires that are different from the original equipment size make certain: (1) The tires have adequate load-carrying capacity based on the vehicle placard, (2) The tires have sufficient inflation pressure to carry the load and (3) There is proper clearance with no interference points between the tire and vehicle. The consumer must be aware to always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow any of these warnings may result in loss of control of the vehicle, leading to an accident and serious injury or death.

ST-METRIC TRAILER: A tire with an "ST" preceding the size designation identifies that it is primarily intended for service on trailers (e.g., ST225/75R15).

LOAD INDEX

WARNING: DO NOT OVERLOAD TIRES. OVERLOADING TIRES CAN RESULT IN TIRE FAILURE, PERSONAL INJURY AND/OR DEATH.

The load index is a numerical code associated with the maximum load a tire can carry at the speed indicated by its Speed Symbol under specified service conditions up to 210 km/h (130 mph). Check the doorjamb or owner's manual to determine the maximum vehicle load.

LOAD INDEX AND LOAD					
Load Index	Load		Load Index	Load	
	Passenger	Light Truck		Passenger	Light Truck
79	437 kg (963 lbs.)	437 kg (965 lbs.)	105	925 kg (2039 lbs.)	925 kg (2040 lbs.)
80	450 kg (992 lbs.)	450 kg (990 lbs.)	106	950 kg (2094 lbs.)	950 kg (2095 lbs.)
81	462 kg (1019 lbs.)	462 kg (1020 lbs.)	107	975 kg (2149 lbs.)	975 kg (2150 lbs.)
82	475 kg (1047 lbs.)	475 kg (1045 lbs.)	108	1000 kg (2205 lbs.)	1000 kg (2205 lbs.)
83	487 kg (1074 lbs.)	487 kg (1075 lbs.)	109	1030 kg (2271 lbs.)	1030 kg (2270 lbs.)
84	500 kg (1102 lbs.)	500 kg (1100 lbs.)	110	1060 kg (2337 lbs.)	1060 kg (2335 lbs.)
85	515 kg (1135 lbs.)	515 kg (1135 lbs.)	111	1090 kg (2403 lbs.)	1090 kg (2405 lbs.)
86	530 kg (1168 lbs.)	530 kg (1170 lbs.)	112	1120 kg (2469 lbs.)	1120 kg (2470 lbs.)
87	545 kg (1201 lbs.)	545 kg (1200 lbs.)	113	1150 kg (2535 lbs.)	1150 kg (2535 lbs.)
88	560 kg (1235 lbs.)	560 kg (1235 lbs.)	114	1180 kg (2601 lbs.)	1180 kg (2600 lbs.)
89	580 kg (1279 lbs.)	580 kg (1280 lbs.)	115	1215 kg (2679 lbs.)	1215 kg (2680 lbs.)
90	600 kg (1323 lbs.)	600 kg (1325 lbs.)	116	1250 kg (2756 lbs.)	1250 kg (2755 lbs.)
91	615 kg (1356 lbs.)	615 kg (1355 lbs.)	117	1285 kg (2833 lbs.)	1285 kg (2835 lbs.)
92	630 kg (1389 lbs.)	630 kg (1390 lbs.)	118	1320 kg (2910 lbs.)	1320 kg (2910 lbs.)
93	650 kg (1433 lbs.)	650 kg (1435 lbs.)	119	1360 kg (2998 lbs.)	1360 kg (3000 lbs.)
94	670 kg (1477 lbs.)	670 kg (1475 lbs.)	120	1400 kg (3086 lbs.)	1400 kg (3085 lbs.)
95	690 kg (1521 lbs.)	690 kg (1520 lbs.)	121		1450 kg (3195 lbs.)
96	710 kg (1565 lbs.)	710 kg (1565 lbs.)	122		1500 kg (3305 lbs.)
97	730 kg (1609 lbs.)	730 kg (1610 lbs.)	123		1550 kg (3415 lbs.)
98	750 kg (1653 lbs.)	750 kg (1655 lbs.)	124		1600 kg (3525 lbs.)
99	775 kg (1709 lbs.)	775 kg (1710 lbs.)	125		1650 kg (3640 lbs.)
100	800 kg (1764 lbs.)	800 kg (1765 lbs.)	126		1700 kg (3750 lbs.)
101	825 kg (1819 lbs.)	825 kg (1820 lbs.)	127		1750 kg (3860 lbs.)
102	850 kg (1874 lbs.)	850 kg (1875 lbs.)	128		1800 kg (3970 lbs.)
103	875 kg (1929 lbs.)	875 kg (1930 lbs.)	129		1850 kg (4080 lbs.)
104	900 kg (1984 lbs.)	900 kg (1985 lbs.)	130		1900 kg (4190 lbs.)

Note: for European-Metric passenger tires, reference "Passenger" load; for tires marked with prefixes "LT" or "ST" or suffixes "LT" or "C," reference "Light Truck" load.

WARNING: Vehicle handling, traction, ride comfort and other performance parameters may be significantly affected by a change in tire size or type. Before replacing tires, always consult and follow the vehicle owner's manual because some vehicle manufacturers prohibit changing tire size. When selecting tires that are different from the original equipment size, make certain: (1) The tires have adequate load-carrying capacity based on the vehicle placard, (2) The tires have sufficient inflation pressure to carry the load and (3) There is proper clearance with no interference points between the tire and vehicle. The consumer must be aware to always drive safely and obey all traffic laws. Avoid sudden, sharp turns or lane changes. Failure to follow any of these warnings may result in loss of control of the vehicle, leading to an accident and serious injury or death.

NEVER FIT TIRES TO A VEHICLE THAT MAY HAVE LESS LOAD-CARRYING CAPACITY THAN REQUIRED BY THE ORIGINAL EQUIPMENT MANUFACTURER.

Examples: Many vehicles, such as large passenger vans, require Load Range E tires as designated by the vehicle manufacturer. Fitment of a tire with less load-carrying capacity, such as Load Range D, is not allowed.

In other cases, tires of the same size may have different load index numbers in the service description. You must make certain the replacement tires fitted to the vehicle have a load-carrying capacity equal to or greater than what the original equipment manufacturer specifies.

NOTE: Goodyear manufactured and/or marketed European-Metric passenger tires and P-Metric passenger tires are interchangeable as long as they have the same section width, same aspect ratio, same rim diameter, and same Load Range (LL, SL or XL). Conversely, Goodyear-manufactured and/or marketed P-Metric passenger tires and European-Metric passenger tires are interchangeable as long as they have the same section width, same aspect ratio, same rim diameter, and same Load Range (LL, SL or XL).

Caution: Never substitute a "Standard Load" (SL) or "Light Load" (LL) tire for an "Extra Load" (XL) tire. If the vehicle was originally equipped with "Extra Load" (XL) tires, replace those tires with similar-sized XL tires.

Caution: In addition, never substitute a "Light Load" (LL) tire for a "Standard Load" (SL) tire. If the vehicle was originally equipped with "Standard Load" (SL) tires, replace those tires with similar-sized SL or XL tires.

** SAFETY WARNING **

Serious injury may result from:

- Tire failure due to underinflation/overloading – follow the owner's manual or tire placard in vehicle.
- Explosion of tire/rim assembly due to improper mounting – only specially trained persons should mount tires.
- Do not spin wheels in excess of 35 mph as indicated on the speedometer. Personal injury and severe damage may result from excessive wheel spinning, including tire disintegration or axle failure.

PROTECT YOUR TIRE INVESTMENT – REGISTER YOUR NEW TIRES.

TIRE TERMINOLOGY

CROSS-SECTION WIDTH: External sidewall-to-sidewall measurement of inflated tire, exclusive of ornamental ribs and lettering. Sometimes called section width.

FOOTPRINT: The area of the tire's tread that is in actual contact with the ground. The mark left by a loaded tire's tread as it comes into contact with the road surface.

NUMERICAL RATING SCALE

1 = Lower Performance | 10 = Higher Performance


The rating scale can help you compare tires within each category (performance, commuter touring, all-terrain and winter). However, using the scale to distinguish between tires across different types of categories would be misleading. For example, utilizing the rating scale to compare a commuter touring tire to a performance tire will not generate an accurate comparison.

PERFORMANCE RATINGS

Wet Traction	10
Ride Comfort	8
Quiet Ride	9
Fuel Efficiency	8
Snow Traction	10

ORIGINAL EQUIPMENT (O.E.): Refers to tires sold to automobile manufacturers for equipping their new cars.

RIM WIDTH: Distance between two opposite, inside edges of the rim flanges.

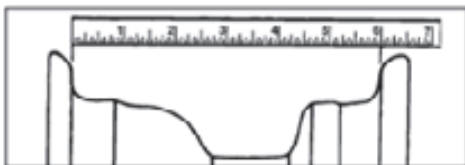

ROLLING RESISTANCE: The force required to keep a tire moving at a constant speed. The lower the rolling resistance, the less energy needed to keep a tire moving.

ROTATION: The systematic movement of tires from one vehicle position to another to maximize tread life and minimize irregular wear.

SECTION HEIGHT: The height of a tire measured from the rim to the outer tread in an unloaded tire.



TREAD DEPTH: The distance from the tread surface to the bottom of the grooves.

UNIFORMITY: A term describing the amount of radial and lateral force variation in a tire.

RETAILER RESOURCES

DEALER MARKETING SUPPORT

AMD (An OSI Company)	Goodyear Tire Wall	1-877-843-3517
Brandmuscle	MarketingZone (U.S./Canada)	1-855-233-5795
DAC (Canada)	Online Ratings/Reviews Management & Business Listing (Canada)	1-800-361-4322 ext. 6235
Epicor MechanicNet	CRM Database Marketing Program (U.S.)	1-877-632-4638
GBMS	Goodyear® Business Management System Help Line	1-800-331-4541
Goodyear RDS Sales Team	Local Goodyear Retail Development Specialist (RDS)	1-888-245-1834
Holland & Crosby	Point-of-Sale and Marketing Materials (Canada)	1-877-527-1323 ext. 224
Imagine! Print Solutions	Point-of-Sale and Marketing Materials (U.S.)	1-866-263-3316
MarketingZone	Customizable Marketing Templates, Graphics & Local Promotions	1-855-233-5795
RewardBank	AIR MILES® Terminals (Canada)	1-888-819-6878
Spectrio	Digital Menu Board, Lounge TV	1-813-559-0459
Spectrio	In-store On-Hold Msg, WiFi, Music	1-800-584-4653
TCS Technologies	Dealer Websites & Management	1-888-449-8473
The Summit Group	Goodyear Licensed Apparel & Gifts (U.S./Canada)	1-877-435-1993
Tire-HQ™	Tire-HQ Dealer Help Line	1-800-331-4541
Valassis (U.S.)	Targeted Media Campaign Program	1-443-834-4871
Yext (U.S.)	Online Business Reputation Management & Ratings/Reviews (U.S.)	1-844-830-2285

GOODYEAR CREDIT CARD (U.S.)

Advertising Checking Bureau (ABC)	Ask for Apps Status	1-888-980-6155
Citi	Dealer Assistance for Credit Authorizations	1-800-767-1114
Citi	Merchant Support (settlement reports, merchant fees, charge-backs, training, dealer set-up, etc)	1-800-729-7647
Citi	Phone-In Applications/IVR	1-800-767-0292
Imagine! Print Solutions	Goodyear Credit Card Point-Of-Sale	1-866-263-3316

CREDIT CARD TERMINALS/POINT-OF-SALE ASSISTANCE

GBMS	Help Desk	1-800-331-4541
Heartland Payment Systems	Help Desk	1-800-767-5258
Merchant Partners	Help Desk	1-866-699-4912
VAST Online	Help Desk	1-484-387-1010

INFOLINK

InfoLink	24-Hour Fax Line	1-800-532-2296
InfoLink	OTR Tire Action Line	1-800-227-9531
InfoLink	Sales & Service	1-800-755-2772

TRAINING

Goodyear Learning Center	24/7 Help Desk Support	1-800-380-0054
RewardsPlus	RewardsPlus Rewards Help Line	1-877-777-9937
Wirecard	Learn & Earn Reloadable Card	1-866-326-8689

CONSUMER ASSISTANCE

Advertising Checking Bureau (ACB)	2020 Consumer Rebate Inquiries	1-844-539-5503
360 Insights	2021 Consumer Rebate Inquiries	1-888-683-8724
Goodyear	Consumer Relations (Tire Adjustments/Problems) (U.S.)	1-800-321-2136
Goodyear	Consumer Relations (Tire Adjustments/Problems) (Canada)	1-800-387-3288
Wirecard (Lost/Stolen)	Prepaid Rebate Debit Card – Lost/Stolen	1-877-855-7201

HELPFUL WEBSITES & EMAILS

DAC (Canada)	https://www.dacgroup.com
Dunlop® Tires	www.dunloptires.com
G3Xpress Dealer Program	www.g3xpress.com
Goodyear Consumer Rebates (U.S.)	www.goodyear.com/rebates
Goodyear Consumer Rebates (Canada)	www.goodyear.ca/rebates
Goodyear Identification & Signs	gy_identification@goodyear.com
Goodyear Learning Center	www.thegoodyearlearningcenter.com
Goodyear Tires (U.S.)	www.goodyear.com
Goodyear Tires (Canada)	www.goodyear.ca
H&C POS Catalog (Canada)	thegoodyearstorecanada.com
Imagine! POS Catalog (U.S.)	shop.discoverimagine.com/goodyear
Imagine! POS Orders	GoodyearHelpDesk@imagineps.com
Kelly® Tires	www.kellytires.com
Learn & Earn Reloadable Card	login.wirecard.com/goodyearrewardsplus
MarketingZone	www.goodyearmarketingzone.com
National Accounts/ Fleet Sales	www.goodyearfleetnetwork.com
RewardBank - Issuer of AIR MILES (Canada)	www.goodyear.rewardbank.ca
RewardsPlus	www.gyrewardsplus.com
Spectrio	www.spectrio.com/brands/goodyear
TCS Technologies (Dealer Websites)	www.tcstire.com
Tire & Service Network	www.goodyear.tsn.com
Tire-HQ	www.tire-hq.com
The Summit Group	www.thegoodyearstore.com
Yext (U.S.)	goodyear-support@yext.com

HELPFUL TIRE-HQ PATHS — WWW.TIRE-HQ.COM

Digital Dealer ToolKit	Tire-HQ->Goodyear Websites->Digital Dealer ToolKit
Dealer Advertising and POS Enrollment (Canada)	Tire-HQ->Goodyear Websites->Dealer Programs->Dealer Advertising and POS Enrollment
Goodyear.com Retailer Details Page Update	Tire-HQ->Goodyear Websites->Dealer Programs->Consumer Dealer Profile
Tire & Service Network Program	Tire-HQ->Goodyear Websites->Dealer Programs->Tire & Service Network

GOODYEAR ADVERTISING HELP

Advertising_Help@goodyear.com

DAC (Canada) TSNBussinesListings@dacgroup.com

TSN_Advertising@goodyear.com

Yext (U.S.) Goodyear-Support@yext.com

Information in this book is subject to change. For the most up-to-date information, please check Tire-HQ.com or Dealer ToolKit at toolkit.goodyear.com.